LIGHTING SOLUTIONS

The bright side of the ship

LightPartner®

Philosophy

Three things you should know about us

1 Established by experienced specialists in 1995, Lightpartner® has developed into the leading provider of marine lighting technology within only a few years.

2 As our customer, you have a range of products at your disposal that is unique in scope and quality – from the sophisticated special solution for luxury liners to the standard luminaire for container vessels.

3 We see ourselves as a creative, reliable and fair partner for shipyards, shipping companies and architects, with whom we cooperate on a basis of trust.

All of this together defines for us the new standard in marine lighting technology. We want to be measured according to this yardstick – in the future as well.

What we think about partnership

The shipping industry is characterized by fierce competition. This is why our goal has been and still is to open up new scope to our customers through a product range that ist unique worldwide in terms of its extensiveness and quality: on the basis of onschedule delivery, price competitiveness, innovativeness and strict orientation to their needs.

We help when there are problems. Unconventionally, within the shortest possible time and through personal commitment. In this way we want to return some of the trust that our customers place in us.

We are there where you need us

Shipping is international and so is Lightpartner: Thanks to our agents at all major shipbuilding centers we are within a short distance everywhere where you need us. Thus, when we talk about being close to the customer, we mean that literally.

Register

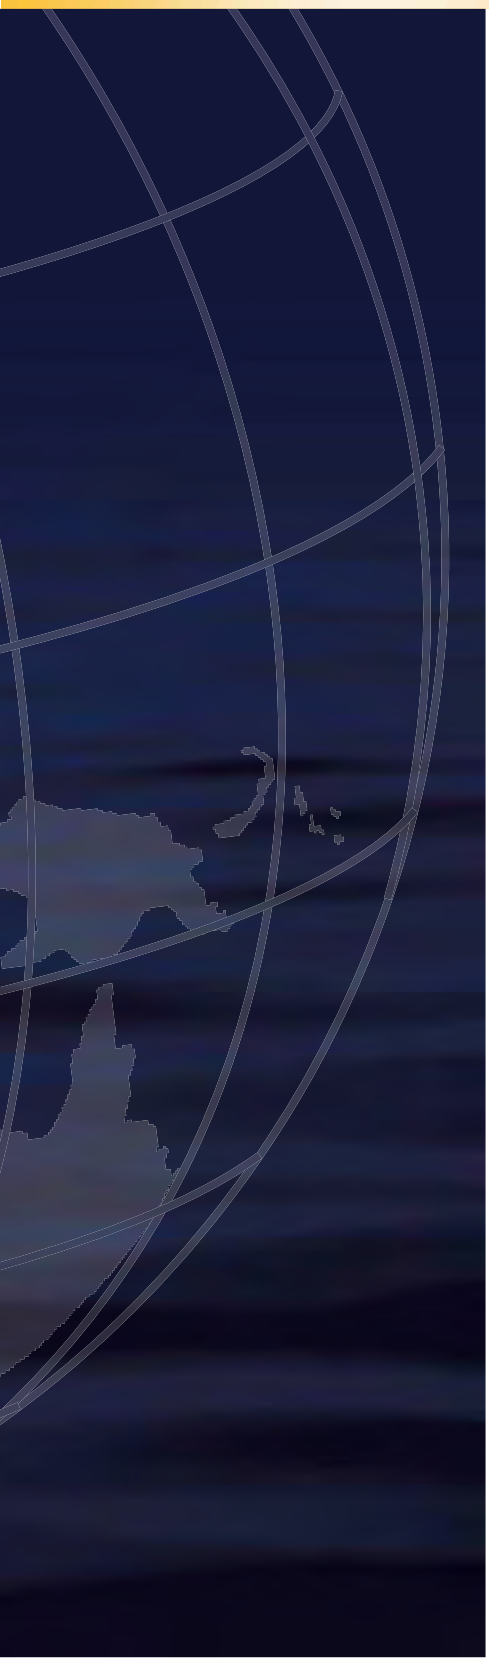

1. Floodlights 4 - 25

2. Technical and Outdoor Luminaires 26 - 47

3. Wall and Ceiling Luminaires, recessed 48 - 67

4. Wall and Ceiling Luminaires, surface 68 - 85

5. Emergency Lighting 86 - 95

6. Downlights 96 - 121

7. Office and Workplace Luminaires 122 - 127

8. Decorative Table and Wall Lights 128 - 141

Floodlights

	Product	Page
	ST76 70 W HIT-DE	6
	ST76 max. 400 W HST/HIT	8
	ST76 max. 400 W HST/HIT	10
	ST76 2x 400 W HST/HIT	12
	ST76 max. 1000 W HST/HIT	14
	ST76 400 W HST Fc2	16
	VG76	17
	ST76 200 W Halogen	18
	ST76 500 W Halogen	20
	ST76 1000 W Halogen	22
	ST23 Explosion proof	24
	ST68 max. 400 W, IP68	25

Part no. 5101004100-001

Light source	HIT-DE lamp (not included)
Lamp base	RX7s
Wattage	1x 70 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Floodlight, 1x 70 W for HIT-DE lamps with integrated electronic ballast

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide beam angle
Cable entry	Junction box, cable gland M20, nickel plated brass
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	4.0 kg

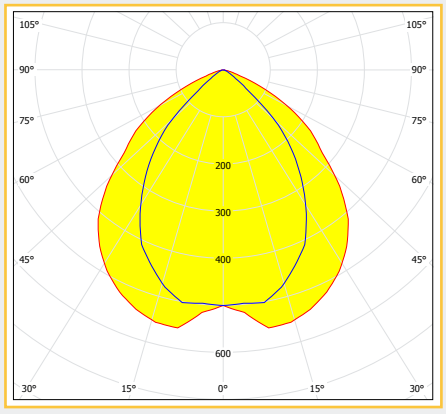

Extras

Different cable glands on request

Technical modification reserved without prior notice

Part no. 5101004100-001

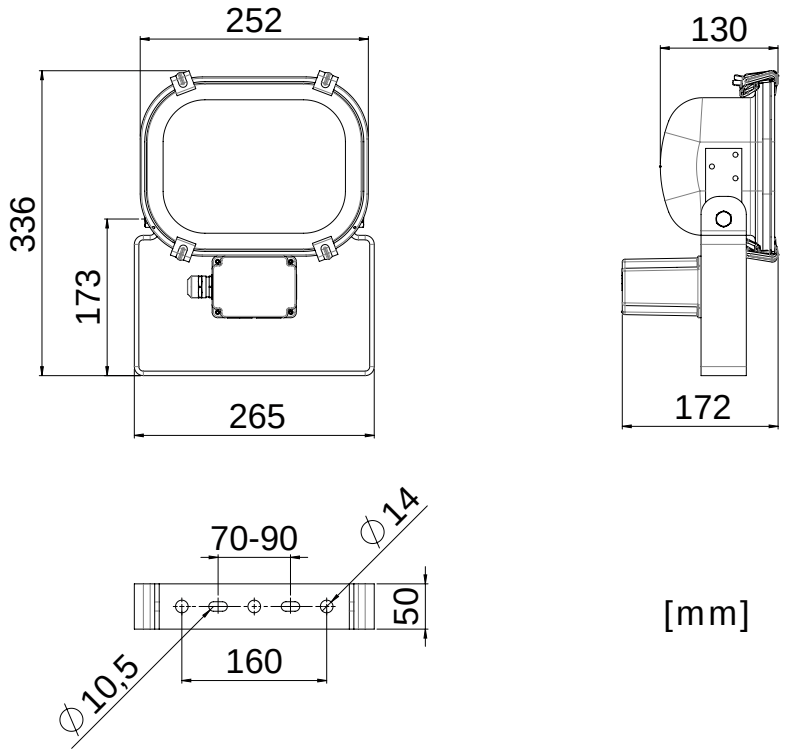

[mm]

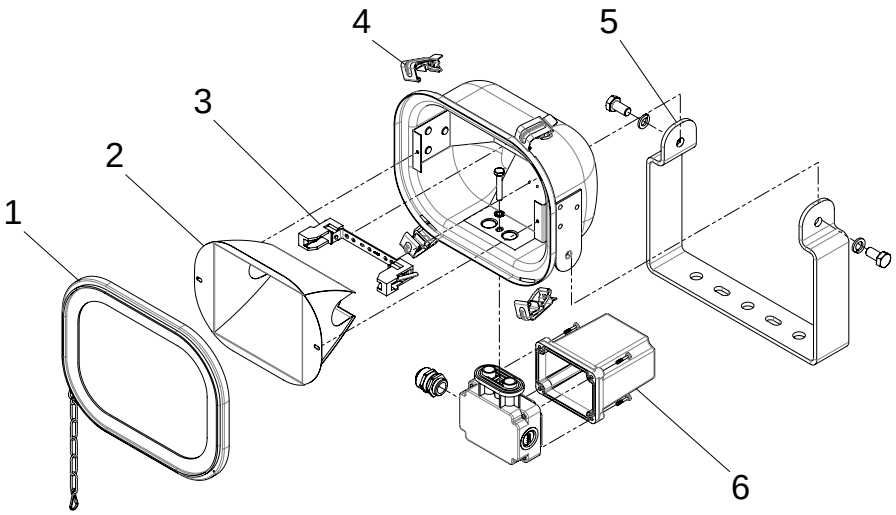

Spare parts		Part no.
1	Cover with frame	7902001800
2	Reflector	7901000200
3	Lamp holder RX7s	7111023000
4	Clamps (4 pcs)	7106002400
5	Bracket	7501008200
6	Ballast unit	7305000400

Part no. 5101000700-xxx

Light source	HST/ HIT lamp (not included)
Lamp base	E40
Wattage	1x 250 W 1x 400 W
Voltage	230 V AC
Frequency	50 Hz or 60 Hz

Floodlight, max. 1x 400 W for HST/HIT lamps with integrated ballast

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel brackets, adjustable
Reflector	Aluminium anodized, wide beam angle
Cable entry	Junction box, cable gland brass with earthing insert
Ballast	Electromagnetic ballast (included)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67

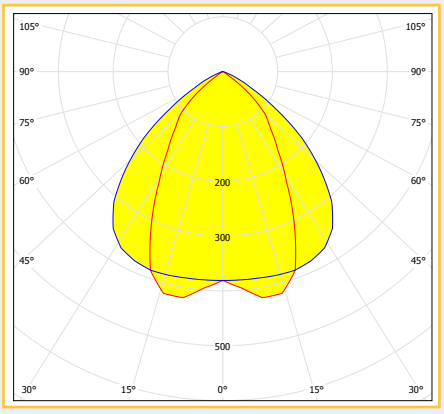

Lamp	Ballast	Part no.	Weight
HST/HIT 250 W	50 Hz l.p.f	5101000700-006	16.0 kg
	60 Hz l.p.f	5101000700-008	16.0 kg
	50 Hz h.p.f.c	5101000700-007	16.0 kg
	60 Hz h.p.f.c	5101000700-012	16.0 kg
HST/HIT 400 W	50 Hz l.p.f	5101000700-005	18.4 kg
	60 Hz l.p.f	5101000700-001	18.4 kg
	50 Hz h.p.f.c	5101000700-004	18.4 kg
	60 Hz h.p.f.c	5101000700-002	18.4 kg

Extras

- 120 V AC execution
- Narrow beam reflector
- Different cable glands on request
- E39 lamp holder

Technical modification reserved without prior notice

Part no. 5101000700-xxx

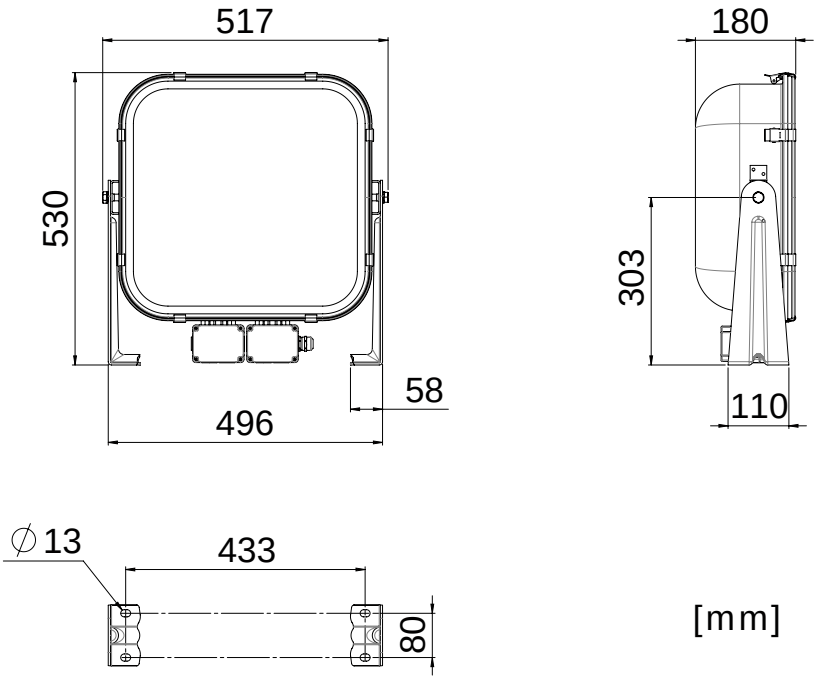

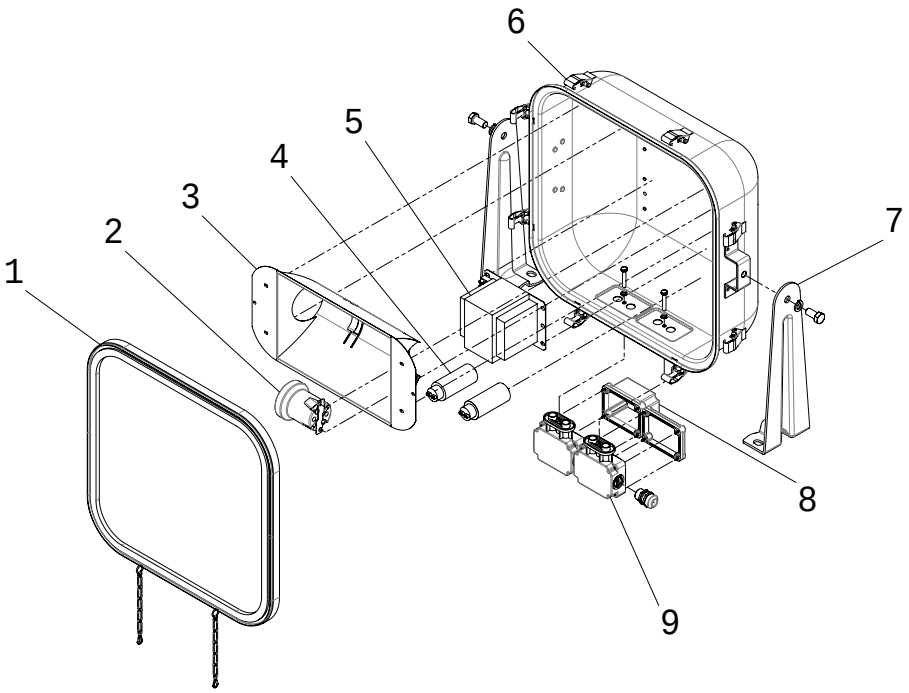

Spare parts		Part no.
1	Cover with frame	7902001700
2	Lamp holder E40	7111001400
3	Reflector wide beam	7901000600
4	Capacitor	on request
5	Ballast	on request
6	Clamps (8 pcs)	7106001800
7	Bracket	7501006200
8	Box with ignitor	7104000200
9	Junction box	7212000900

Part no. Wide beam 5101000600-000
Narrow beam 5101000600-001

Light source	HST/ HIT lamp (not included)
Lamp base	E40
Wattage	1x 250 W 1x 400 W

wide

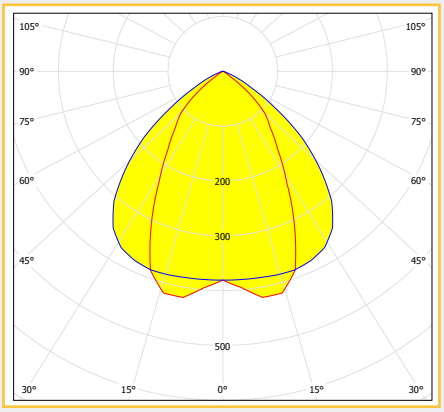

Floodlight, max. 1x 400 W for HST/HIT lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide or narrow beam angle
Cable entry	Junction box, cable gland brass with earthing insert
Ballast	Ballast unit VG76 has to be ordered separately (see page 17)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	7.3 kg

Extras

Different cable glands on request

E39 lamp holder

Technical modification reserved without prior notice

Part no. 5101000600-xxx

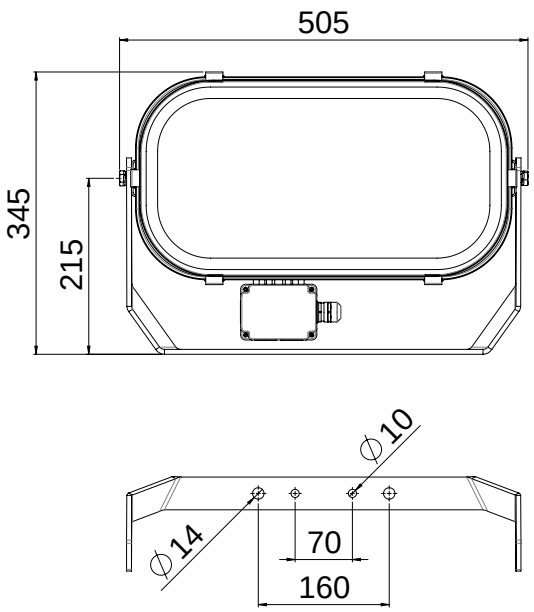

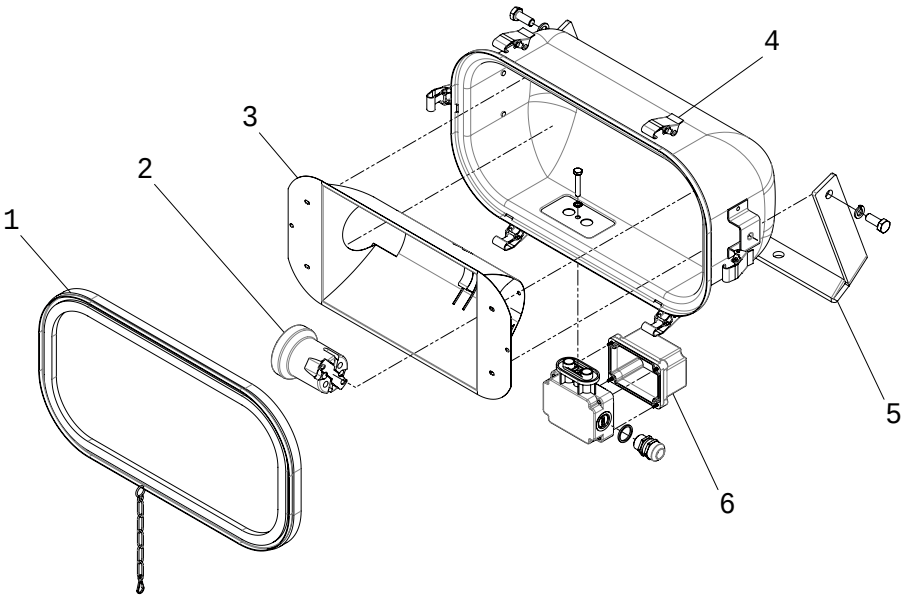

Spare parts		Part no.
1	Cover with frame	7902001400
2	Lamp holder E40	7111001400
3a	Reflector wide beam	7901000600
3b	Reflector narrow beam	7901001000
4	Clamps (6 pcs)	7106000400
5	Bracket	7501000100
6	Box with ignitor	7104000200

Part no. Wide beam 5101000700-000
Narrow beam 5101000700-003

Light source	HST/ HIT lamp (not included)
Lamp base	E40
Wattage	2x 250 W 2x 400 W
Voltage	230 V AC
Frequency	50 Hz or 60 Hz

Floodlight, max. 2x 400 W for HST/HIT lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel brackets, adjustable
Reflector	Aluminium anodized, wide or narrow beam angle
Cable entry	Junction box, cable gland brass with earthing insert
Ballast	Ballast unit VG76 has to be ordered separately (see page 17)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	14.0 kg

wide

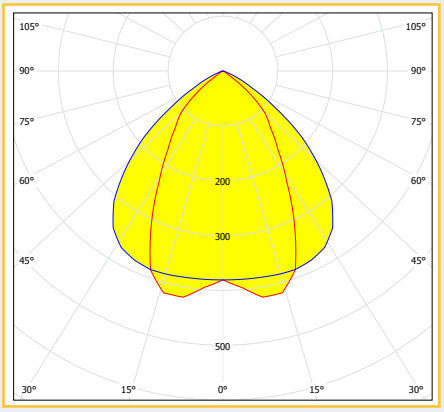

Extras

Different cable glands on request

E39 lamp holder

Technical modification reserved without prior notice

Part no. 5101000700-xxx

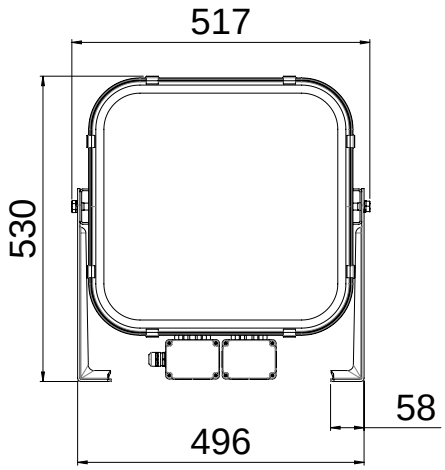

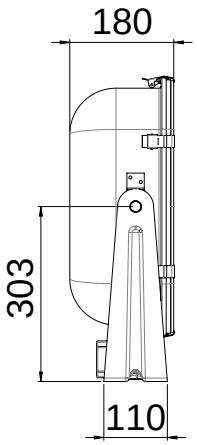

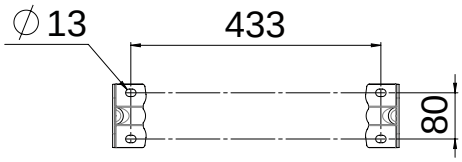

[mm]

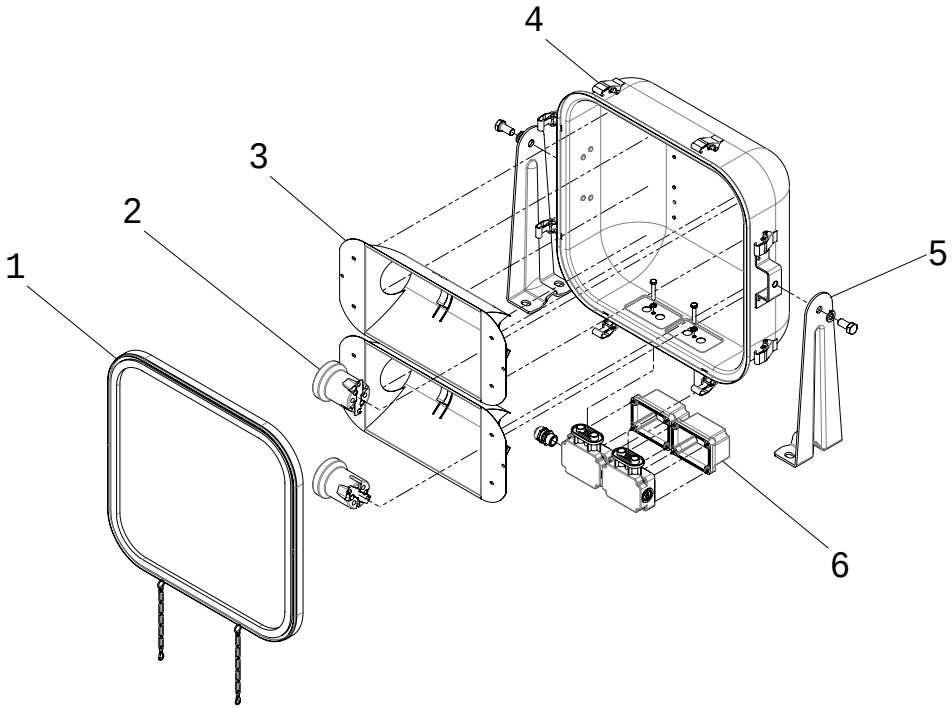

Spare parts		Part no.
1	Cover with frame	7902001700
2	Lamp holder E40	7111001400
3a	Reflector wide beam	7901000600
3b	Reflector narrow beam	7901001000
4	Clamps (8 pcs)	7106001800
5	Bracket	7501006200
6	Box with ignitor	7104000200

Part no. Wide beam 5101001101-001
Narrow beam 5101001101-002

Light source	HST/ HIT lamp (not included)
Lamp base	E40
Wattage	1x 1000 W
Voltage	230 V AC
Frequency	50 Hz or 60 Hz

Floodlight, max. 1x 1000 W for HST/HIT lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel brackets, adjustable
Reflector	Aluminium anodized, wide or narrow beam angle
Cable entry	Junction box, cable gland brass with earthing insert
Ballast	Ballast unit VG76 has to be ordered separately (see page 17)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	11.1 kg

wide

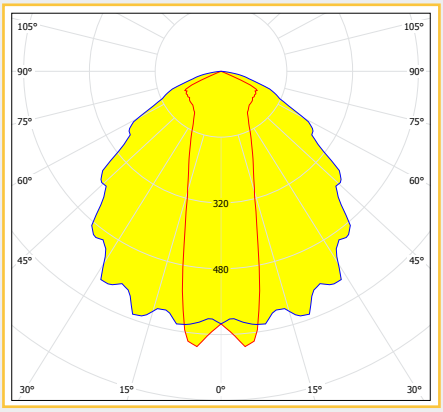

narrow

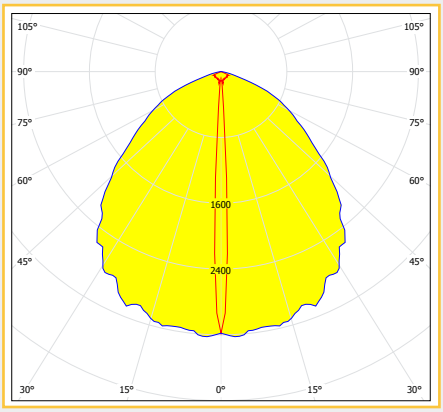

Extras

Different cable glands on request

E39 lamp holder

Technical modification reserved without prior notice

Part no. 5101001101-xxx

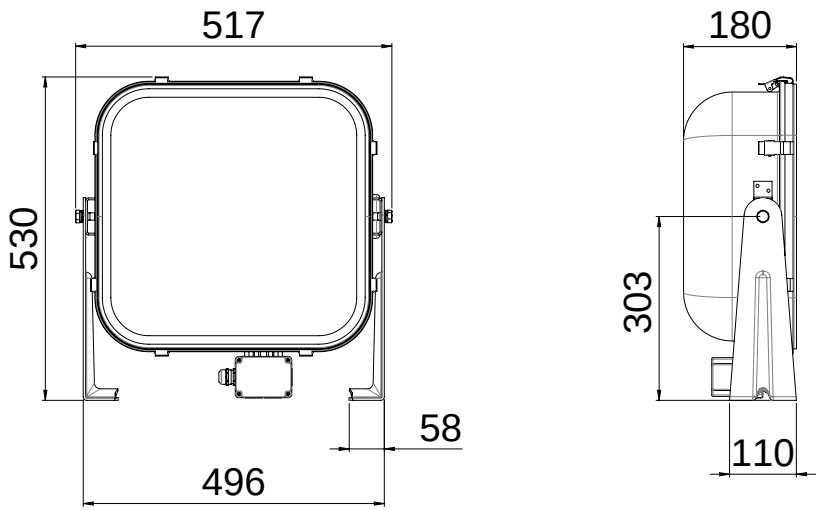

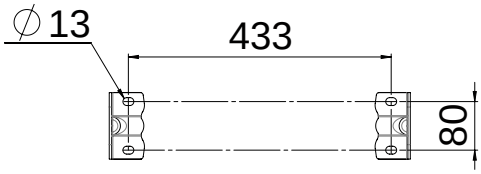

[mm]

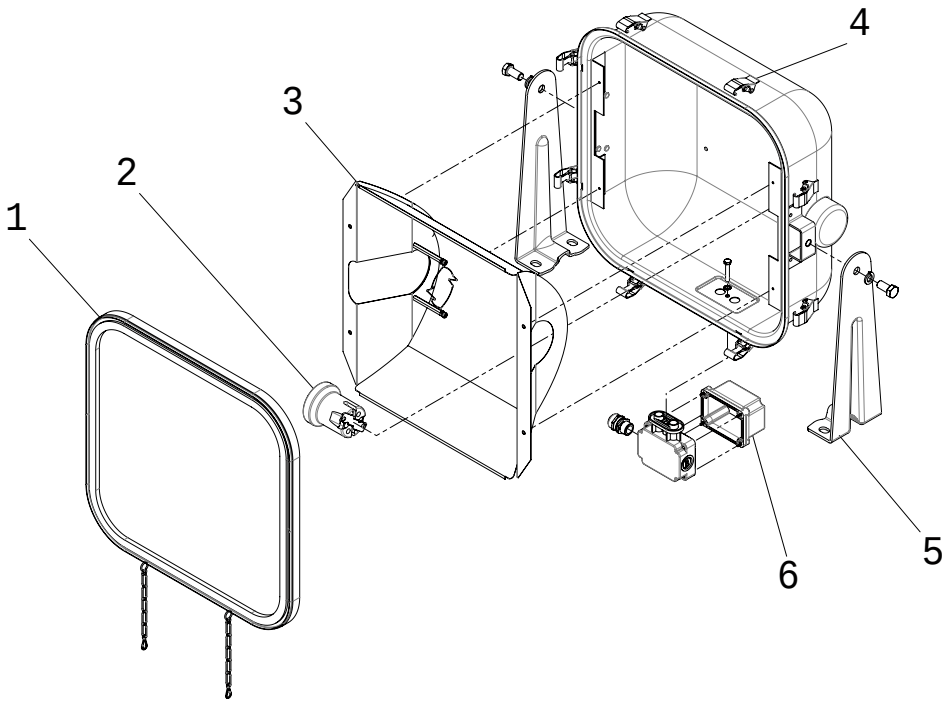

Spare parts		Part no.
1	Cover with frame	7902001700
2	Lamp holder E40	7111005300
3a	Reflector wide beam	7901001600
3b	Reflector narrow beam	7901001700
4	Clamps (8 pcs)	7106001800
5	Bracket	7501008300
6	Box with ignitor	7104000900

Part no. 5101000600-003

Light source	HST-DE lamp (not included)
Lamp base	FC2
Wattage	1x 400 W
Voltage	230 V AC
Frequency	50 Hz or 60 Hz

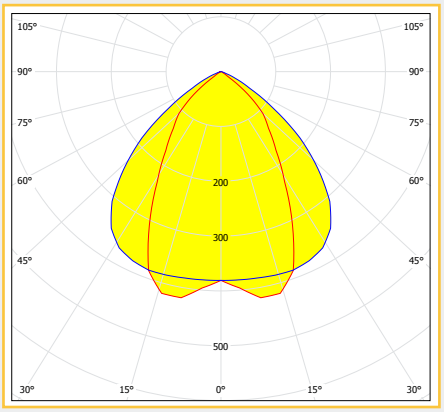

Floodlight, max. 1x 400 W with instant ignition for HST-DE lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide beam angle
Cable entry	Junction box, cable gland brass with earthing insert
Ballast	Ballast unit VG76 has to be ordered separately (see page 17)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	8.5 kg

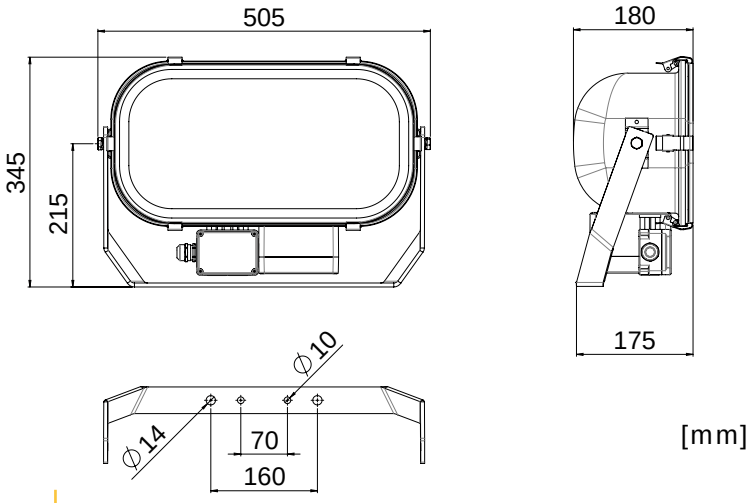

[mm]

Spare parts		Part no.
1	Cover with frame	7902001400
2	Lamp holder Fc2, kit	7111023200
3	Reflector wide beam	7901000300
4	Clamps (6 pcs)	7106000400
5	Bracket	7501000100
6	Box w. instant ignitor	7212002300
7	Junction box	7212000900

Extras

Narrow beam reflector

Different cable glands on request

Technical modification reserved without prior notice

Part no. 5801xxxxxx-xxx

Voltage	230 V AC
Frequency	50 Hz or 60 Hz

Ballast unit for ST76 floodlights with high pressure discharge lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L)
	powder coated white (RAL9016)
Mounting	Mounting holes, Ø 10 mm
Cable entry	Max. 4 cable glands M24, brass with earthing insert
Ballast	Electromagnetic ballast with capacitor
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67

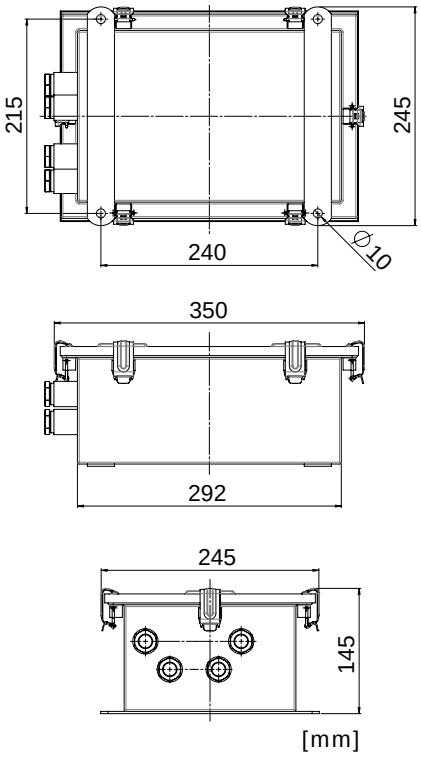

Type		Part no.	Weight
1x 250 W	50 Hz	5801000100	10.8 kg
	60 Hz	5801000100-001	10.8 kg
2x 250 W	50 Hz	5801000200	18.8 kg
	60 Hz	5801000200-001	18.8 kg
1x 400 W	50 Hz	5801000300	10.8 kg
	60 Hz	5801000300-001	10.8 kg
2x 400 W	50 Hz	5801000400	18.8 kg
	60 Hz	5801000400-001	18.8 kg
1x 1000 W	50 Hz	5801000500	15.8 kg
	60 Hz	5801000500-001	15.8 kg

Spare parts	Part no.
Clamps (6pcs)	7106000700

Extras

120 V AC execution

Different cable glands on request

Technical modification reserved without prior notice

Part no. 110-240 V 5101004400-004
24 V 5101004400-003

Light source	QT-DE lamp
	(not included)
Lamp base	R7s
Wattage	1x 200 W
Voltage	110-240 V AC
	24 V DC
Frequency	50-60 Hz
	0 Hz

Floodlight, max. 1x 200 W for halogen lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide beam angle
Cable entry	Junction box, cable gland M20, nickel plated brass
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	3.4 kg

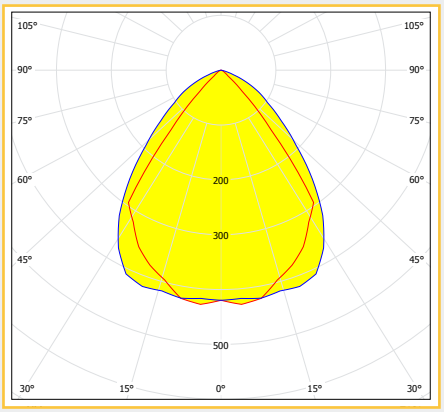

Extras

Execution without junction box

Different cable glands on request

Technical modification reserved without prior notice

Part no. 5101004400-xxx

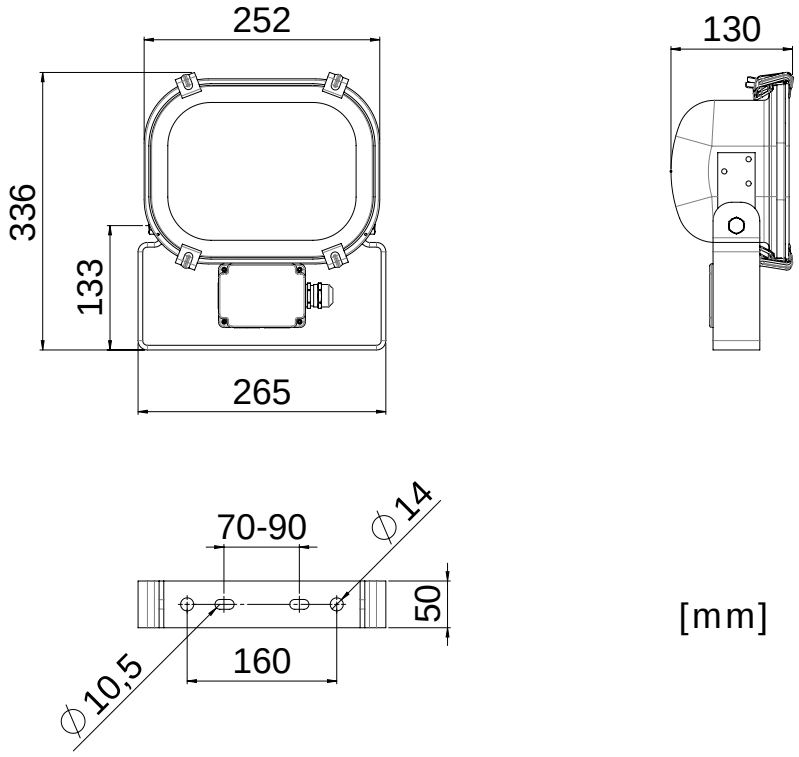

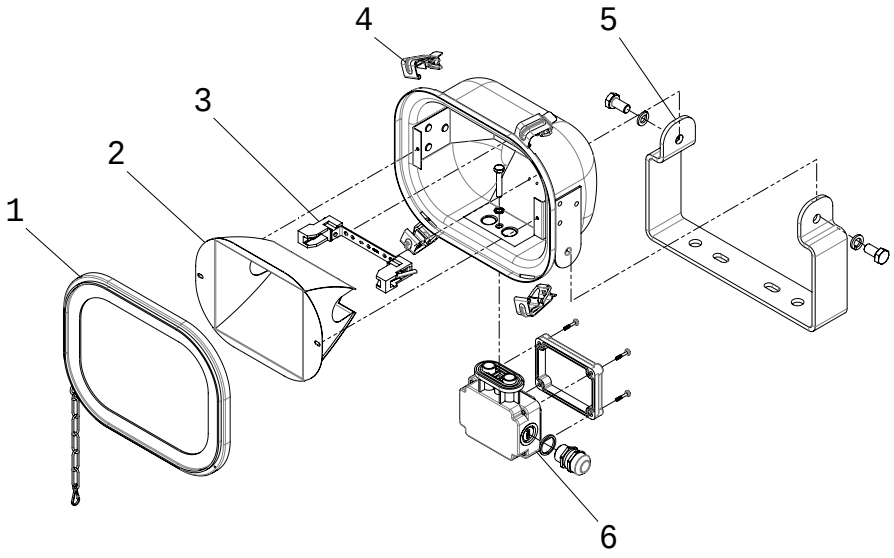

Spare parts		Part no.
1	Cover with frame	7902001800
2	Reflector wide beam	7901000200
3	Lamp holder RX7s	7111018800
4	Clamps (4 pcs)	7106002400
5	Bracket	7501007100
6	Junction box	7212005400

Part no. 5101004200-000

Light source	QT-DE lamp (not included)
Lamp base	R7s
Wattage	1x 500 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Floodlight, max. 1x 500 W for halogen lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide beam angle
Cable entry	Junction box, cable gland M20, nickel plated brass
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	4.7 kg

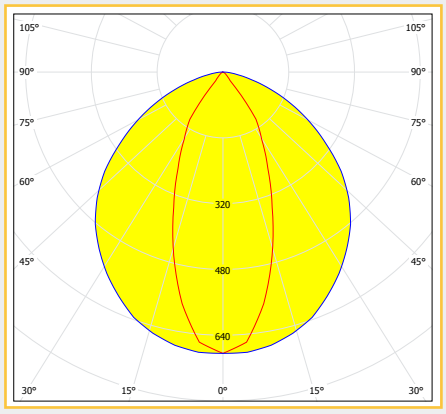

Extras

Different cable glands on request

Part no. 5101004200-000

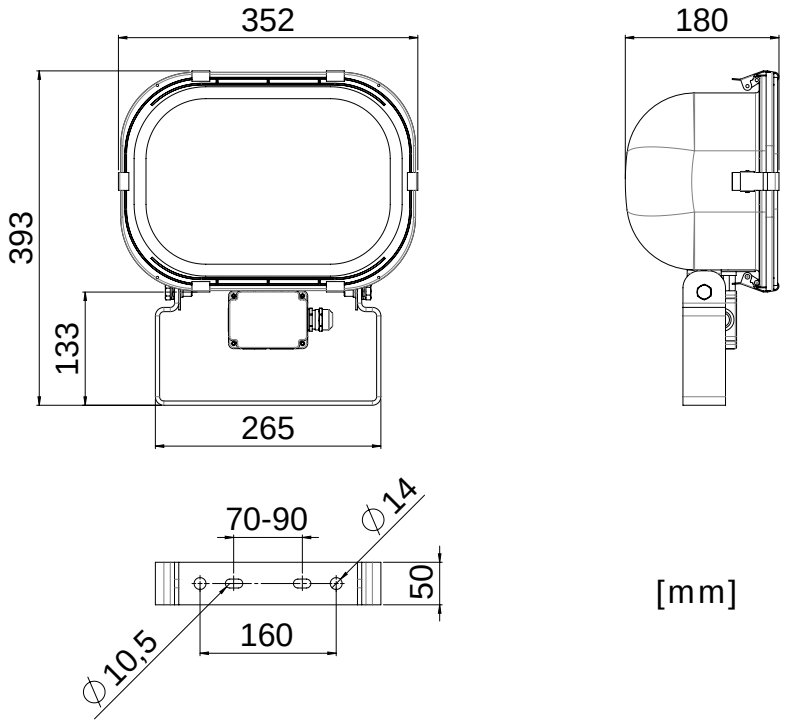

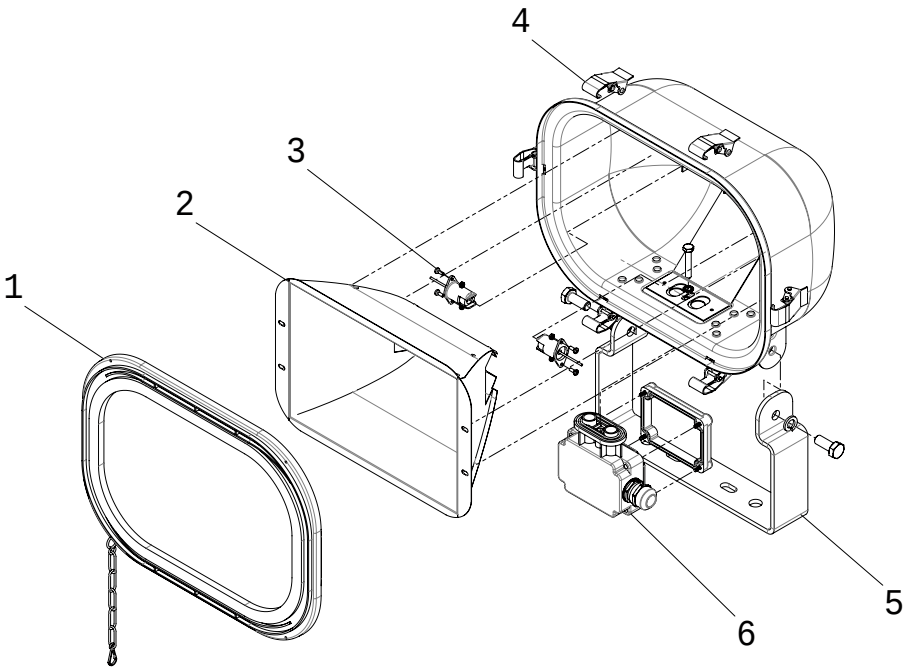

Spare parts		Part no.
1	Cover with frame	7902001300
2	Reflector wide beam	7901002400
3	Lamp holder R7s	7111021200
4	Clamps (6 pcs)	7106000400
5	Bracket	7501007100
6	Junction box	7212005400

Part no. Wide beam 5101000200-000
Narrow beam 5101000200-002

Light source	QT-DE lamp (not included)
Lamp base	R7s
Wattage	1x 1000 W
Voltage	220-240 V AC
Frequency	50-60 Hz

wide

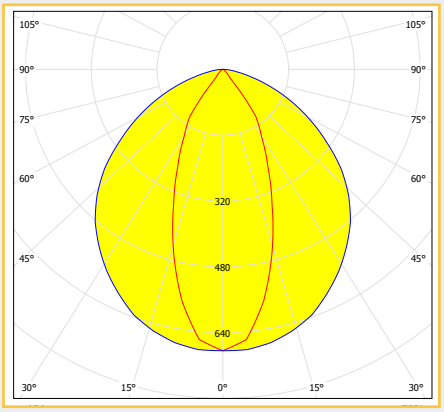

narrow

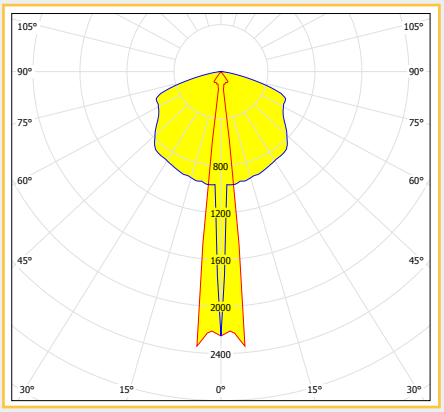

Floodlight, max. 1x 1000 W for halogen lamps

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, powder coated white (RAL9016)
Cover	Tempered glass, DIN 12150
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide or narrow beam angle
Cable entry	Junction box, cable gland brass with earthing insert
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	6.5 kg

Extras

- 120 V AC execution
- Different cable glands on request
- Halogen lamp 400 W or 1000 W with E40 lamp holder

Technical modification reserved without prior notice

Part no. 5101000200-XXX

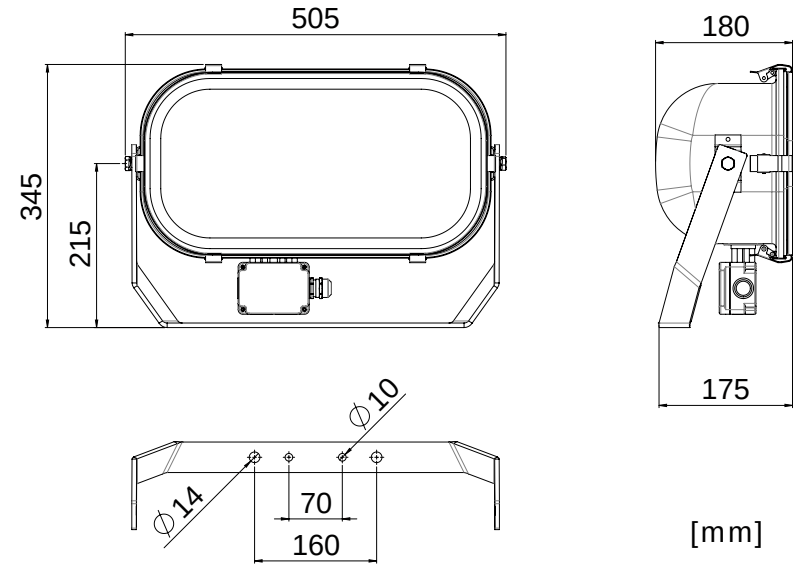

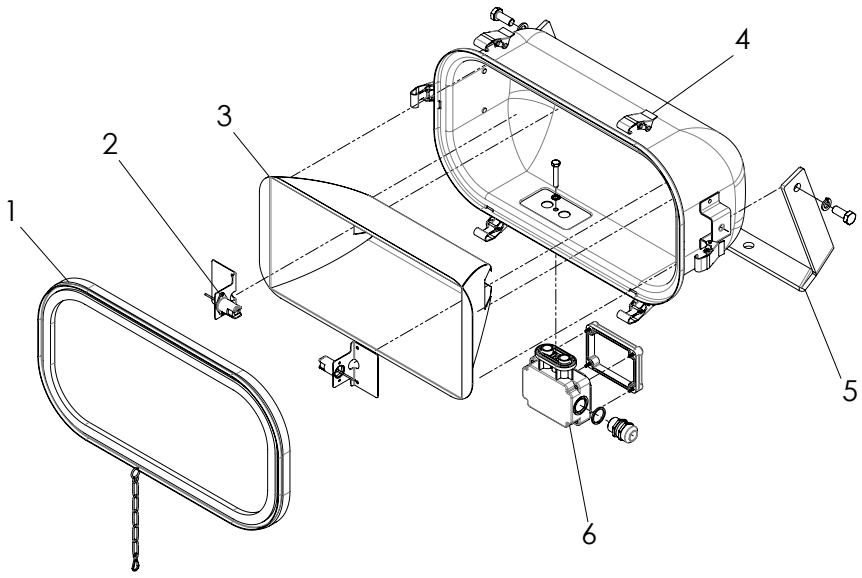

Spare parts		Part no.
1	Cover with frame	7902003000
2	Lamp holder R7s	7111001500
3a	Reflector wide beam	7901000300
3b	Reflector narrow beam	7901000400
4	Clamps (6 pcs)	7106000400
5	Bracket	7501000100
6	Junction box	7212000800

Part no. 5101001700-xxx

Light source	HST/HIT lamp (not included)
Lamp base	E40
Voltage	230 V AC
Frequency	50 Hz or 60 Hz

Explosion proof floodlight, max. 1x 250 W – 1x 600 W for HST/HIT lamps with integrated ballast

Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2G Ex de IIB T3-T4 Gb II 2D Ex tb IIC T85°C-T210°C Db IP66
Housing	Copper-free aluminium with grey polyester paint finish
Cover	Borosilicate glass
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized
Cable entry	2 cable entries M25 (one Ex-e cable gland, one plugged)
Ballast	Electromagnetic ballast with capacitor (included)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP67
Weight	31.0 kg

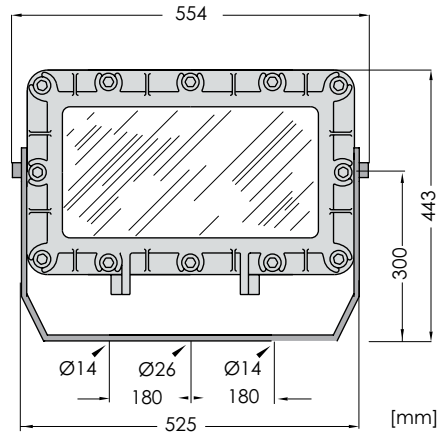

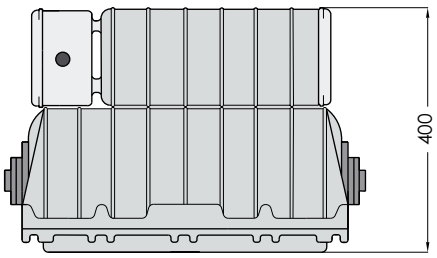

Lamp	Code	Type	Part no.	Ta (gas)	Temp.
HST/HIT 250W	PX 0425	50 Hz	5101001700-005	T3	-20° C - +55° C
				T4	-20° C - +40° C
		60 Hz	5101001700-001	T3	-20° C - +55° C
				T4	-20° C - +40° C
HST/HIT 400W	PX 0440	50 Hz	5101001700-006	T3	-20° C - +55° C
				T4	-20° C - +40° C
		60 Hz	5101001700-002	T3	-20° C - +55° C
				T4	-20° C - +40° C
HST 600W	PX 0460	50 Hz	5101001700-007	T2	-20° C - +55° C
				T3	-20° C - +40° C
		60 Hz	5101001700-003	T2	-20° C - +55° C
				T3	-20° C - +40° C

Part no. 5101002300-005

Light source	HST/HIT lamp (not included)
Lamp Base	E40
Wattage	1x 150 - 400 W

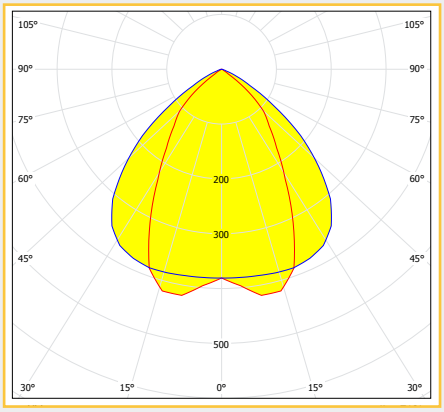

Watertight floodlight, max. 1x 400 W for HST/HIT lamps, IP68

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, 1.4404 (AISI 316L) seamless deep drawn, with ignitor unit on right side, powder coated grey aluminium (RAL9007)
Cover	Borosilicated glass, 19 mm thickness
Mounting	Stainless steel bracket, adjustable
Reflector	Aluminium anodized, wide beam angle
Cable entry	Cable gland M25, nickel plated brass
Connection type	Rubber cable H07RN-F 3G2.5, 20 meters
Ballast	Ballast unit VG76 has to be ordered separately (see page 17)
Wiring	Flexible wiring, high temperature resistant
Protection class	IP68
Weight	16.0 kg

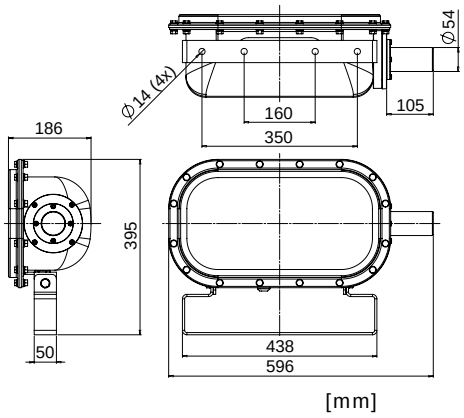

Extras

- Narrow beam reflector
- Ignitor unit on left side of housing
- Different lengths of connection cable on request

Technical modification reserved without prior notice

Part no.	5101006600-xxx

Light source	6x LED engine
Wattage	6x 50 W
Equivalent	400 W HST/HIT
CCT (color)	5,000 K
Luminous	30000 Lm
Flux	at Ta 20°C
Voltage	100-277 V AC
Frequency	50-60 Hz

High Power LED floodlight for decks, holds, industrial areas and seaports

Design	According to rules of maritime classification societies and relevant standards
Housing	Gear tray stainless steel 1.4404 (AISI 316L), powder coated RAL9017. Back side covered with PC hood, RAL9017
Reflectors	22°, 37°, 52°, 91° available
Safety pane	Tempered glass, DIN 12150, clear
Cable entry	IDC fast connection, 1x Cable Ø 9-14mm
Mounting	Stainless steel brackets, adjustable
Protection class	IP66/67
Weight	14 kg

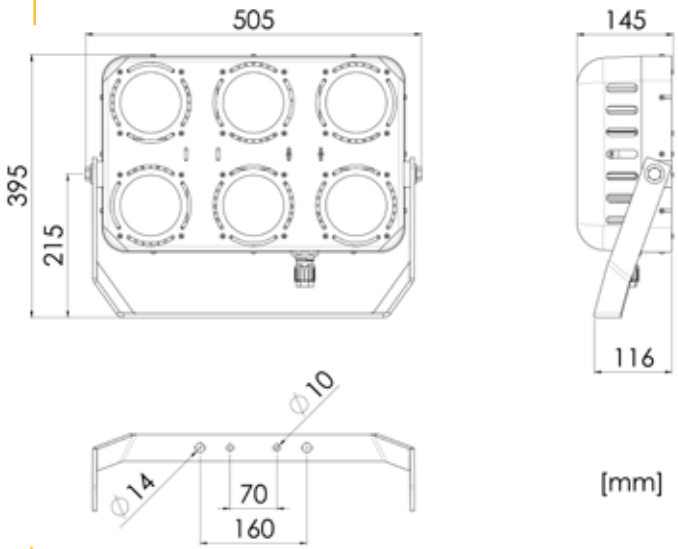



5101006600-001, 22° angle



5101006600-002, 37° angle



5101006600-003, 52° angle



5101006600-004, 91° angle

Extras

- Mix of different beam angles in one arrangement possible
- CCT also optional in 2,700-4,000 K available
- Cable entry : 2x IDC Fast connection , 2 x Cable Ø 9-14m
- Power supply : preinstalled connection cable 3G2.5, 3 meters

Spare parts	Part no.
LED Engine:	
22°	7308000200
37°	7308000300
52°	7308000400
91°	7308000500
PC Hood	7502007000
Bracket	7501000100
Cable entry	7211004800

Technical modification reserved without prior notice

Technical and Outdo

or Luminaires

Product		Page
	TL40	28
	TL09	32
	TL45	33
	TL53	34
	KL62	35
	KL61Z	36
	KR61Z	37
	KR40	40
	EX40	41
	EX92	42
	EX53	43
	SL97	44
	SL49	45
	SL46	46

w. junction box


w. battery box

Part no. 2x 18 W 5105000100-xxx
2x 36 W 5105000200-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Multipurpose watertight luminaire for engine rooms, work shops, stores, passage ways and outdoor areas, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, seamless deep drawn, powder coated white (RAL9016)
Cover	Clear polycarbonate, impact-proof
Mounting	2 mounting holes, Ø 9 mm, optionally with mounting accessories, 8 mm bolt kit or mounting brackets (see page 29)
Cable entry	Max. 4 cable glands M20
Wiring	Flexible wiring, heat resistant up to 105° C, through wiring
Protection class	IP67

2x 18 W

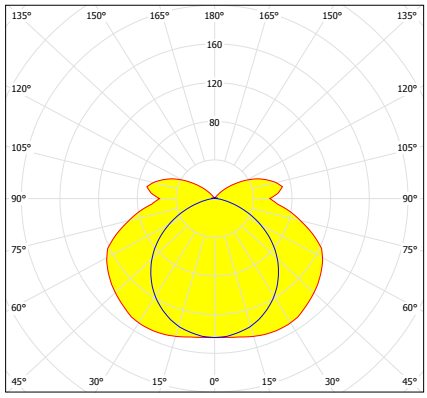

2x 36 W

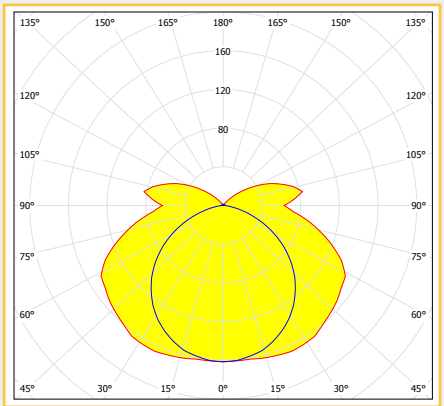

Extras

- T5 execution (14 W, 24 W, 28 W, 50 W)
- 120 V AC execution
- LED execution
- Electromagnetic ballast
- Dimmable electronic ballast
- Stainless steel housing
- Opal polycarbonate cover
- Exterior junction box
- Different cable glands on request
- Emergency battery back-up

Technical modification reserved without prior notice

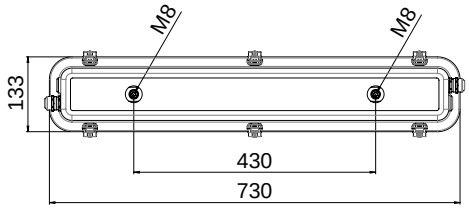



[mm]

18 W

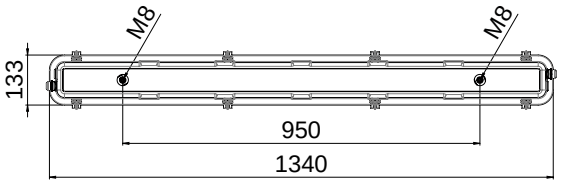



[mm]

36 W

Type: bolt kit

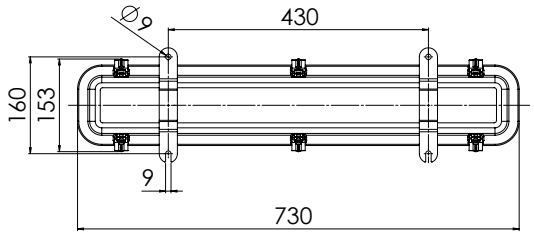



[mm]

18 W

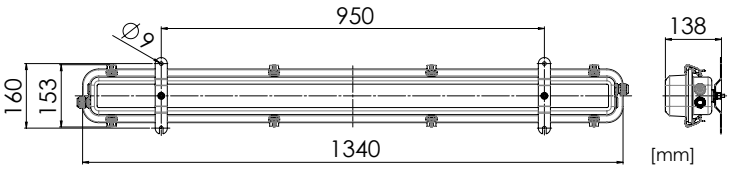

[mm]

36 W

Type: LP160

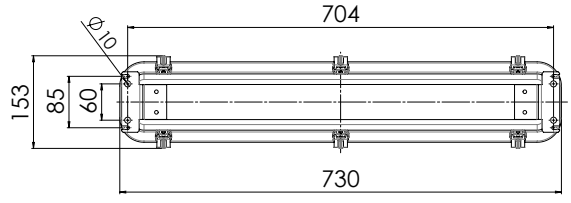



[mm]

18 W

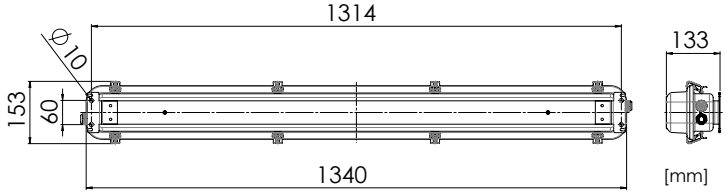

[mm]

36 W

Type: LP GL

Type: Bolt kit 8 mm

Type: LP160

Type: LP GL

Type: Pipe brackets

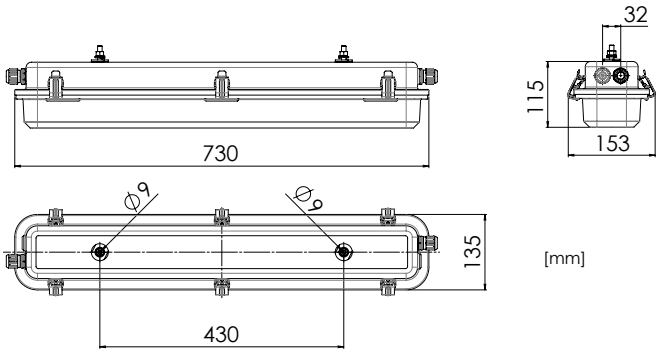

Part no. 5105000100-xxx

w. bolt kit

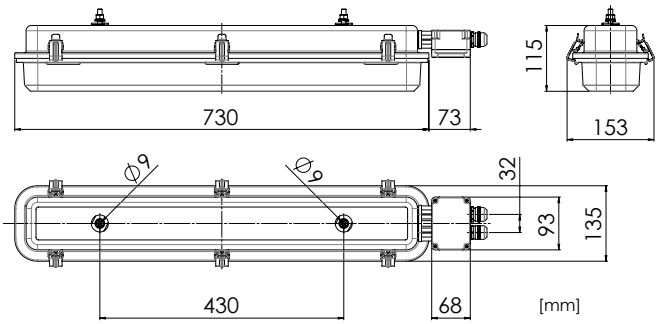

w. junction box

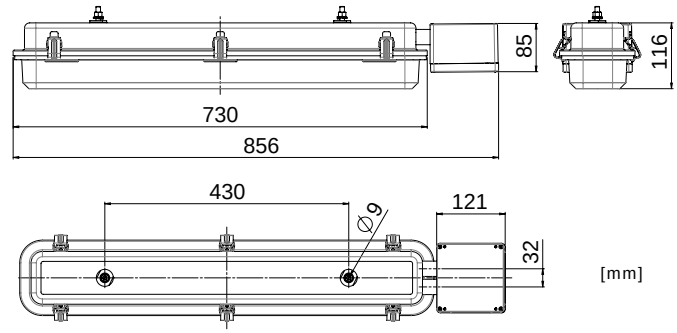

w. battery box

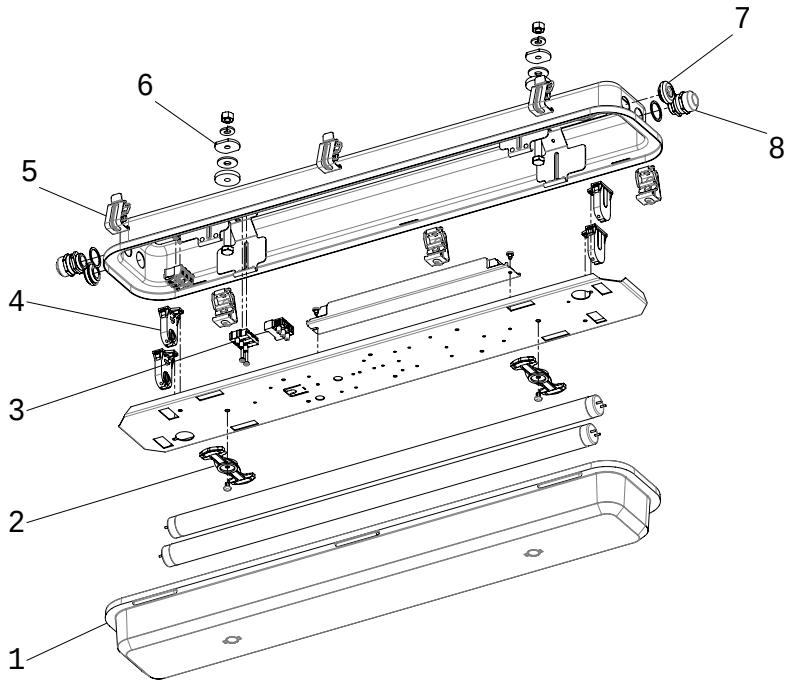

Spare parts		Part no.
1a	Clear cover	7112001100
1b	Opal cover	7112001900
2	Turnlock latch, kit	7508000900
3	Connector kit, 3-pole	7126000600
4	Lamp holder G13 (4 pcs)	7111002000
5	Clamps (6 pcs)	7106000300
6	Bolt kit	7501000500
7	Grommet	7211002800
8	Cable gland	On request

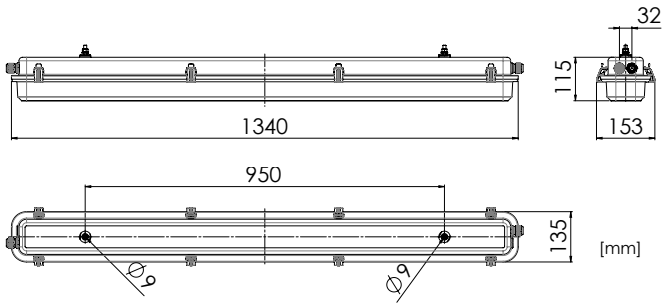

Part no. 5105000200-xxx

w. bolt kit

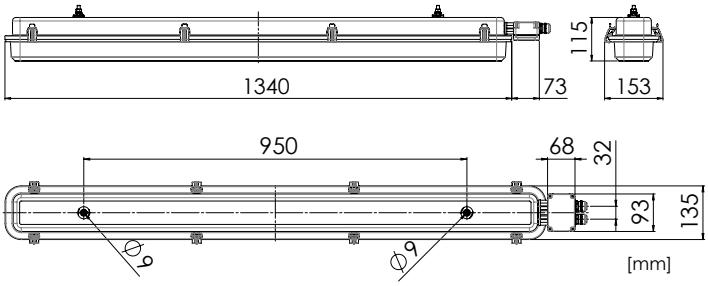

w. junction box

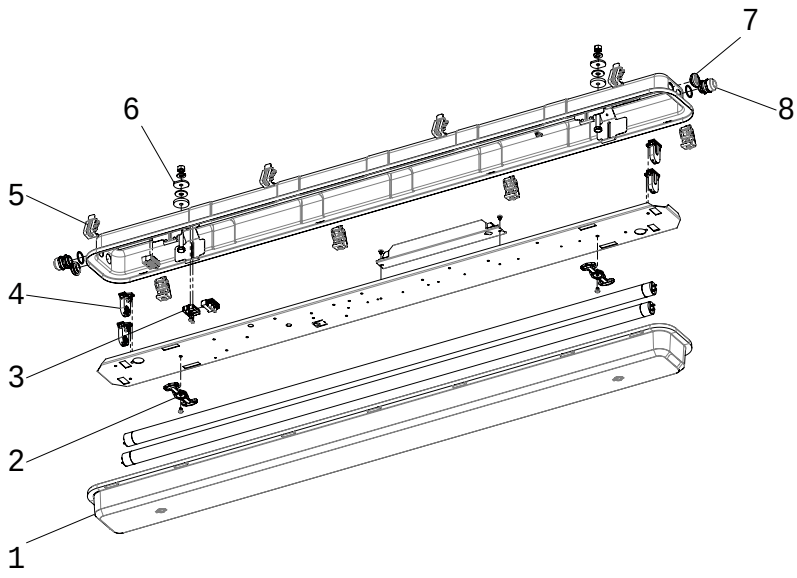

Spare parts		Part no.
1a	Clear cover	7112001200
1b	Opal cover	7112002000
2	Turnlock latch, kit	7508000900
3	Connector kit, 3-pole	7126000600
4	Lamp holder G13 (4 pcs)	7111002000
5	Clamps (8 pcs)	7106002200
6	Bolt kit	7501000500
7	Grommet	7211002800
8	Cable gland	On request

Part no. 5105009300-002

Light source	Compact fluorescent lamp (not included)
Lamp Base	2G7
Wattage	1x 9 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Multipurpose watertight luminaire for decks, stores, engine rooms, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Cover	Clear polycarbonate, satined, impact-proof
Mounting	2 mounting holes, Ø 9 mm
Cable entry	2 cable glands M20, PA 6
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67
Weight	1.6 kg

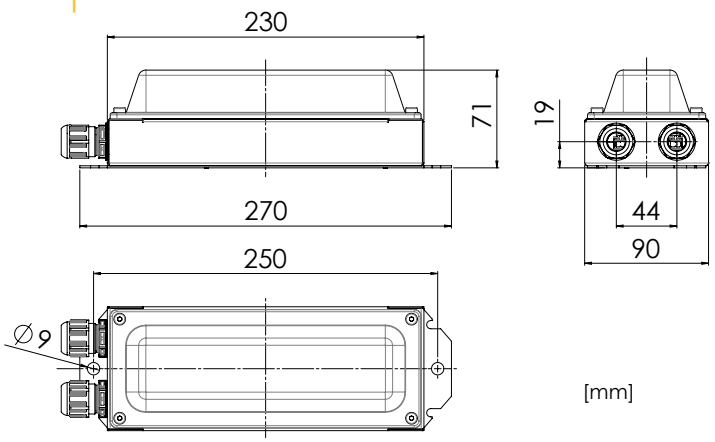

[mm]

Extras

- 120 V AC execution
- Stainless steel housing
- LED execution
- Different cable glands on request
- Opal polycarbonate diffuser

Spare parts	Part no.
Cover satined	7925000900
Cover opal	7925000800
Lamp holder 2G7	7111022100
Electr. ballast	7102022400

Technical modification reserved without prior notice

Part no. 2x 18 W 5105005700-008
2x 36 W 5105005800-005

Light source	T8 fluorescent tubes (not included)
Lamp Base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Watertight luminaire, surface mounting, for decks, stores and engine rooms, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Reinforced polyester
Cover	Clear polycarbonate, prismatic, impact-proof
Mounting	2 mounting holes, Ø 6 mm
Cable entry	2 cable glands PG13.5, PA 6
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67
Weight	2.1 kg (2x 18 W)/3.4 kg (2x 36 W)

2x 18 W

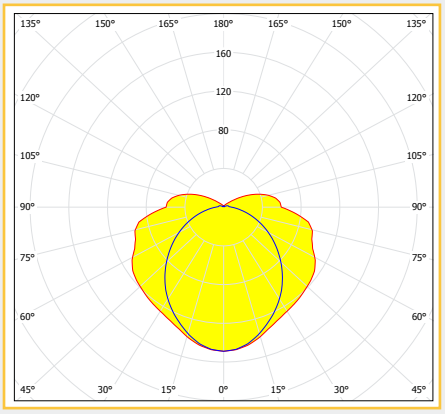

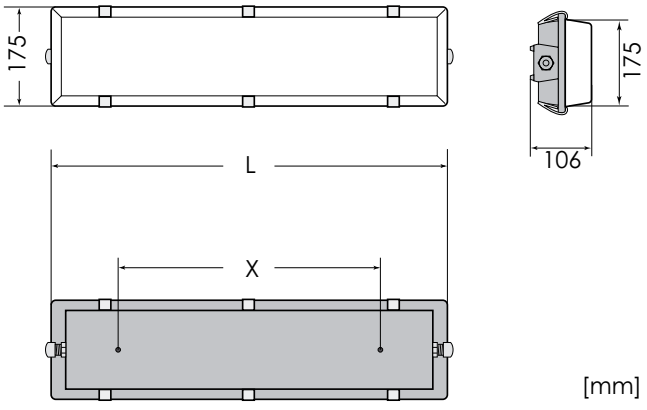

Type	L	X
2x 18 W	682	450
2x 36 W	1295	800

Extras

- 120 V AC execution
- 24 V DC execution
- Electromagnetic ballast
- Emergency battery back-up

Spare parts	Part no.
Cover (2x 18 W)	7112022300
Cover (2x 36 W)	7112009200
Lamp holder G13 (4 pcs)	7111000100

Technical modification reserved without prior notice

Part no. 5105xxxxxx-xxx

Light source	Linear or compact fluorescent lamp (not included)
Voltage	220-240 V AC
Frequency	50-60 Hz

Pressure watertight luminaire for open decks and deck rails, able to resist heavy seas, IP68

Design	According to rules of maritime classification societies and relevant standards
Housing/Cover	Clear polycarbonate, impact-proof
End cap	Polycarbonate
Mounting	2 stainless steel fixing clamps (not included)
Cable entry	2 cable glands M20, PA 6
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP68

TL53 18 W

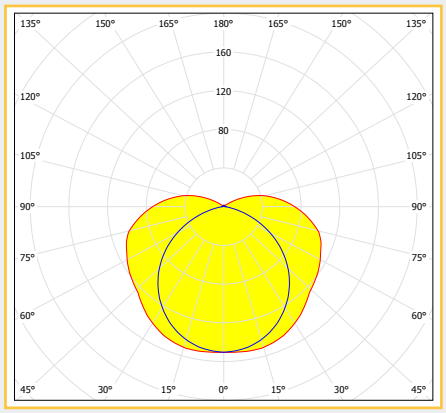

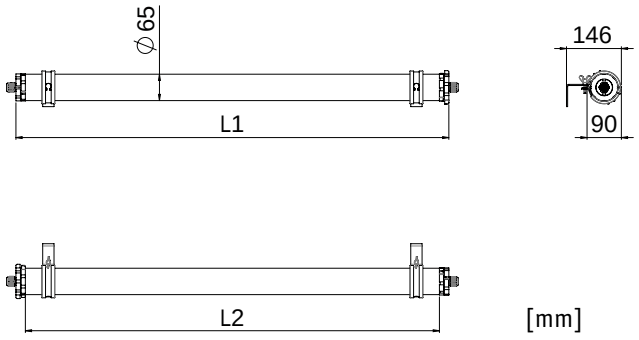

Type	L1	L2
18 W	1148	1100
36 W	1758	1710
24 W	848	800
18 W (CFL)	490	442

fixing clamp

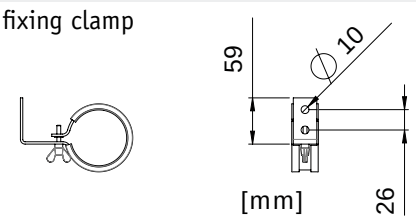

Type	Lamp base	Part no.	Weight
18 W	G13	5105000702-005	2.2 kg
36 W	G13	5105000802-006	3.0 kg
24 W	G5	5105004102-001	2.0 kg
18 W	2G11	5105008400-000	1.2 kg

Extras

- 120 V AC execution
- 24 V DC execution
- LED execution

Spare parts	Part no.
Fixing clamp	7501000401
Cover 18 W	7112008200
Cover 24 W	7112032600
Cover 36 W	7112015900
Cover 18 W (2G11)	7112032700

Technical modification reserved without prior notice

Part no. 5106000500-000

Light source	T8 fluorescent tubes (not included)
Lamp Base	G13
Wattage	2x 18 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Recessed mounted luminaire for kitchens, pantries, provision stores, IP55

Design	According to rules of maritime classification societies and regulation of USPH
Housing	Stainless steel, powder coated white (RAL9016)
Cover	Clear polycarbonate, impact-proof, with silicone rubber gasket
Mounting	6 mounting holes, Ø 5 mm
Cable entry	2 cable glands PG13.5, PA 6
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP55
Weight	4.8 kg

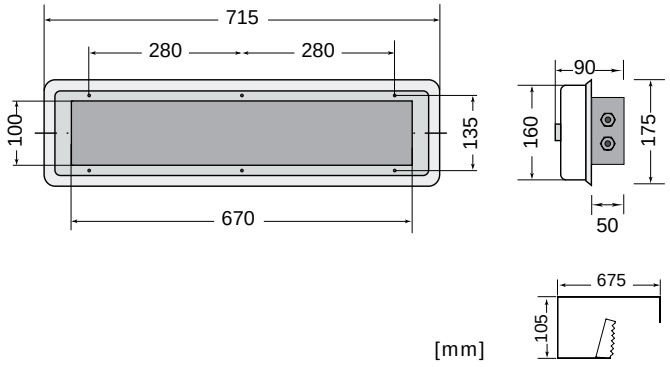

Extras

120 V AC execution

Different cable entries on request

Spare parts	Part no.
Cover	7112015500
Lamp holder G13	7111012600

Technical modification reserved without prior notice

Part no. 5106000xxx-xxx

Light source	T8/T5 fluorescent tubes (not included)
Wattage	2x 14 W 2x 18 W 2x 28 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted luminaire for kitchens, pantries, provision stores

Design	According to rules of maritime classification societies and regulation of USPH
Base plate	Stainless steel
Cover	Clear polycarbonate, impact-proof, with silicone rubber gasket
Mounting	6/8 mounting holes, Ø 5.2 mm
Cable entry	2 cable glands M20. Position see page 38 (Type A / Type B)
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP56
Dimensions	See page 38/39

2x 18 W

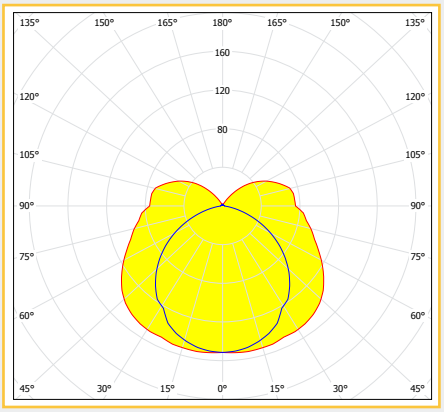

2x 36 W

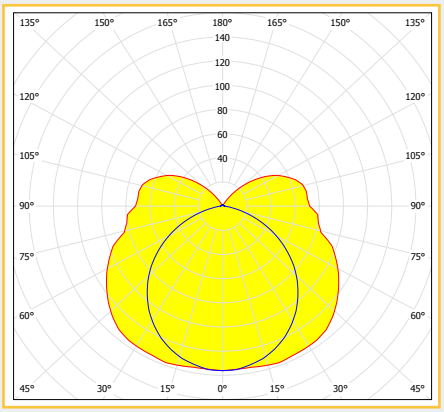

Type	Lamp base	Part no.	Weight
2x 14 W	G5	5106000700-024	2.7 kg
2x 18 W	G13	5106000700-017	3.0 kg
2x 28 W	G5	5106000800-011	5.0 kg
2x 36 W	G13	5106000800-005	5.1 kg

Extras

- 120 V AC execution
- LED execution
- Electromagnetic ballast
- Different cable entries on request
- Emergency battery back-up

Technical modification reserved without prior notice

Part no. 510xxxxx-xxx

Light source	T5 HO-fluorescent tubes/T12 crompton tubes (included)
Wattage	2x 24 W 2x 50 W 2x 40 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted luminaire for refrigerated areas

Design	According to rules of maritime classification societies and regulation of USPH
Base plate	Stainless steel
Cover	Clear polycarbonate, impact-proof, with silicone rubber gasket
Mounting	6/8 mounting holes, Ø 5.2 mm
Cable entry	2 cable glands M20
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP56
Dimensions	See page 38/39

Type	Lamp base	Part no.	ta	Weight
2x 24 W	G5	5106000700-005	-25°C- +35°C	2.7 kg
2x 50 W	G5	5106000800-004	-25°C- +30°C	5.5 kg
2x 40 W	G13	5107000600-001	-25°C- +30°C	3.1 kg

Extras

- 120 V AC execution
- LED execution
- Different cable entries on request

Technical modification reserved without prior notice

Part no. 5106000700-xxx
5107000600-xxx

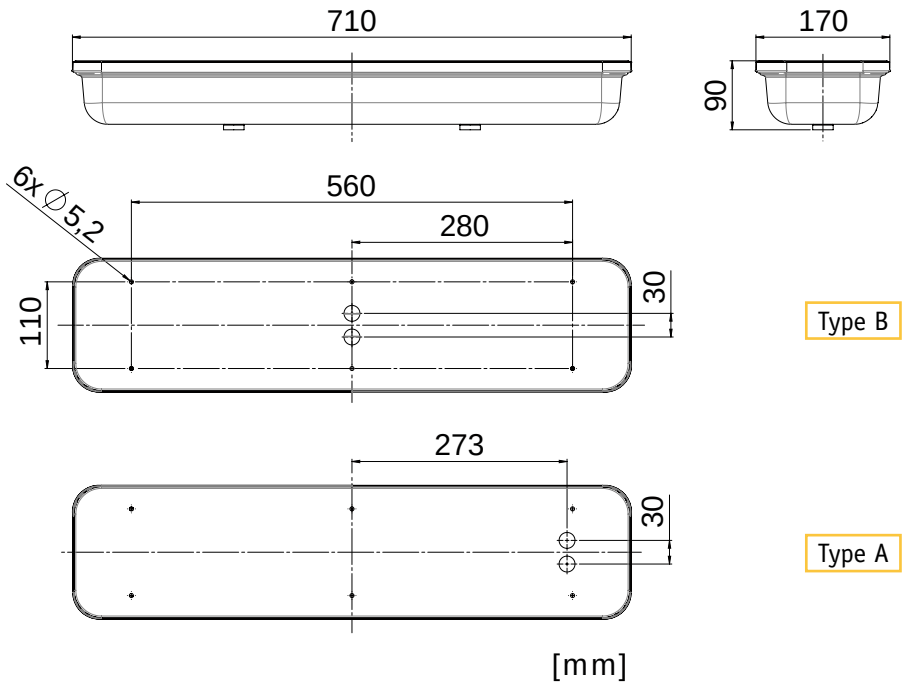

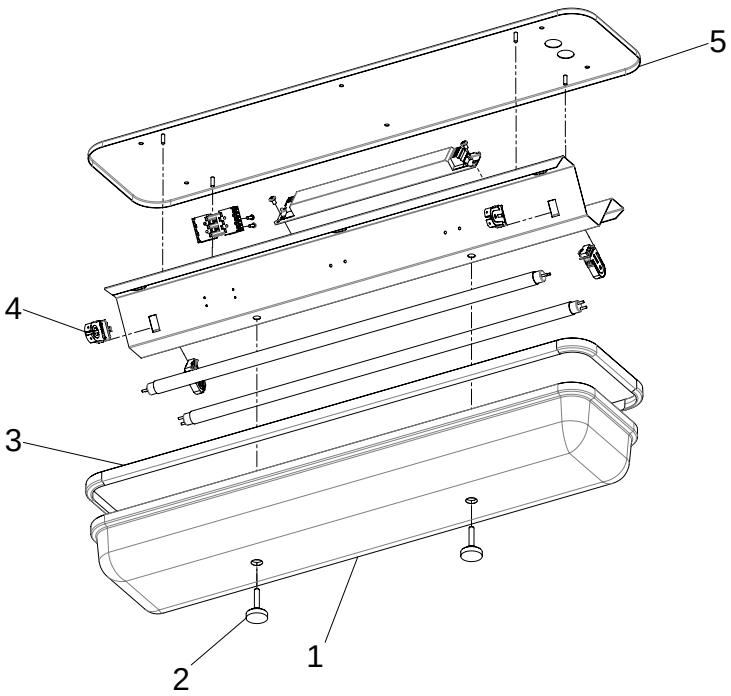

	Spare parts	Part no.
1	Cover	7112003200
2	Cover screws (6 pcs)	7508000100
3	Silicone gasket	7301000200
4	Lamp holder G5 (4pcs)	7111023100
	Lamp holder G13 (4pcs)	7111023800
5	Base plate (type A)	7210001700
	Base plate (type B)	7210001600

Part no. 5106000800-xxx

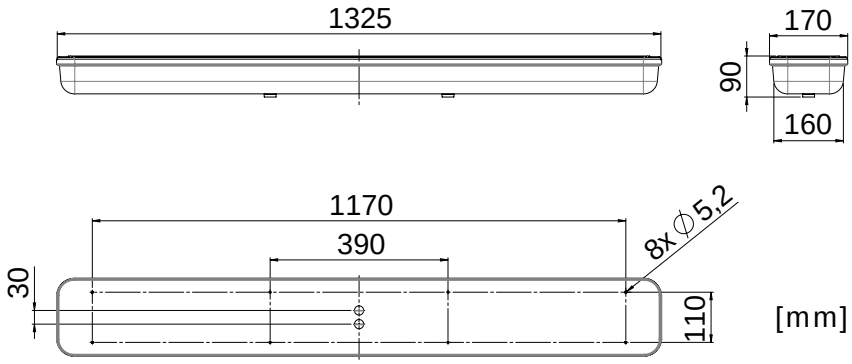

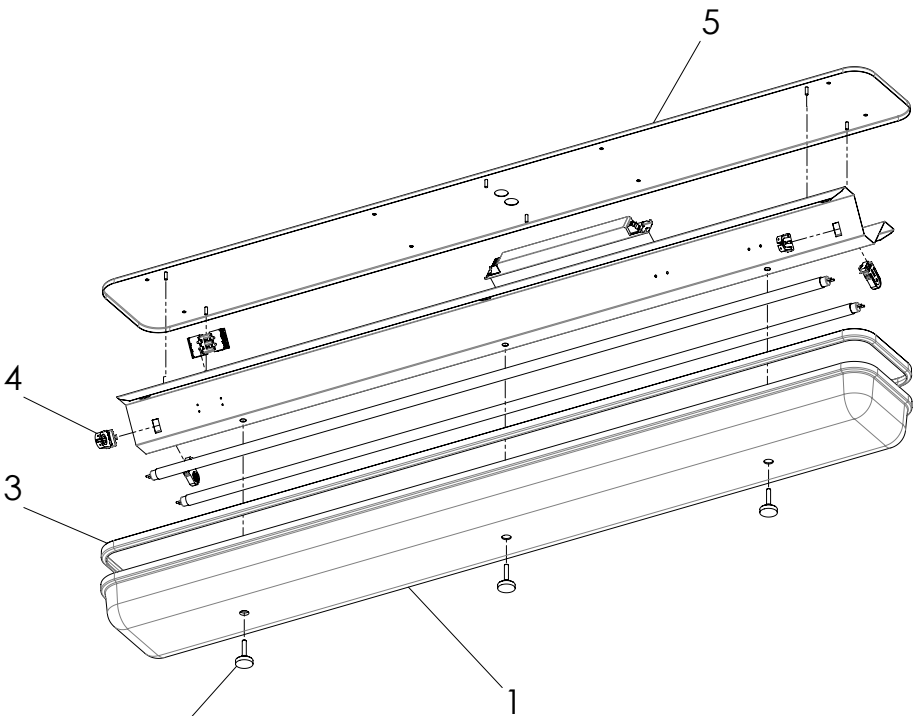

	Spare parts	Part no.
1	Cover	7112020000
2	Cover screws (6 pcs)	7508000100
3	Silicone gasket	7301000300
4	Lamp holder G5 (4pcs)	7111023100
	Lamp holder G13 (4pcs)	7111023800
5	Base plate	7210001900

Part no. 5107000500-001

Light source	T12 Crompton tubes (not included)
Lamp Base	G13
Wattage	2x 40 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Coldroom luminaire, surface mounting, for refrigerated areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, seamless deep drawn, powder coated white (RAL9016)
Cover	Clear polycarbonate, impact-proof
Mounting	Bolt kit, 8 mm
Cable entry	2 cable glands M20, PA 6, 2 grommets
Wiring	Flexible wiring, heat resistant up to 105°C
Ta	-25°C - +30°C
Protection class	IP67
Weight	3.1 kg

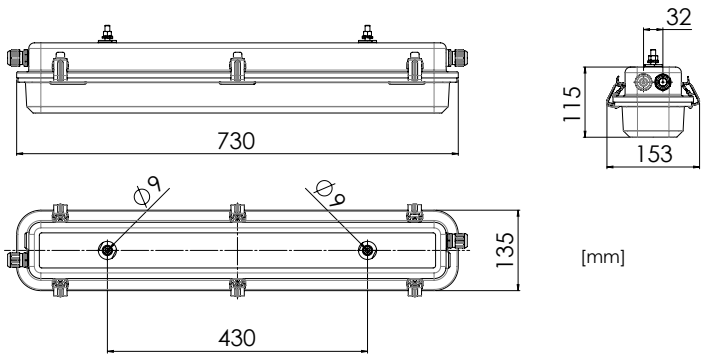

Extras

- 120 V AC execution
- Stainless steel housing
- Different cable glands on request
- Different mounting systems available (see page 29)

Spare parts	Part no.
Cover	7112001100
Lamp holder G13 (4 pcs)	7111002000

Technical modification reserved without prior notice

Part no. 2x 18 W 5108001000-002
2x 36 W 5108001200-004

Light source	T8 fluorescent tubes (not included)
Lamp Base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Explosion proof luminaire, surface mounting

Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2G Ex d e mb IIC T5 Gb II 2D Ex t IIIC T60°C IP66/67 Db (or T65°C for 2x 36 W)
Housing	Galvanized steel, seemless deep drawn, powder coated white (RAL9016)
Cover	Clear polycarbonate, impact-proof
Mounting	Mounting brackets
Cable entry	1 Ex cable gland M20
Ta	-20°C - +40°C
Protection class	IP67
Weight	4.6 kg (2x 18 W)/6.3 kg (2x 36 W)

2x 18 W

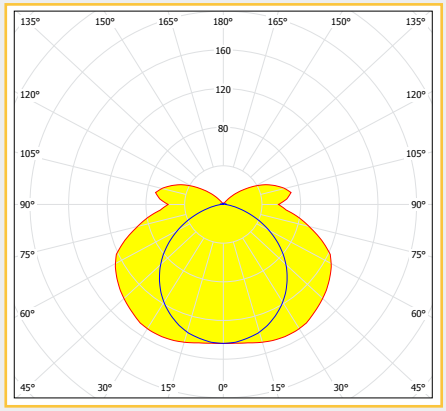

2x 36 W

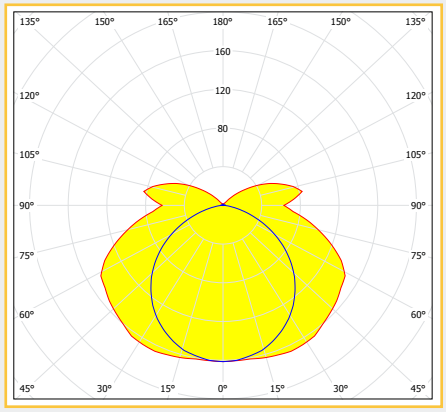

18 W

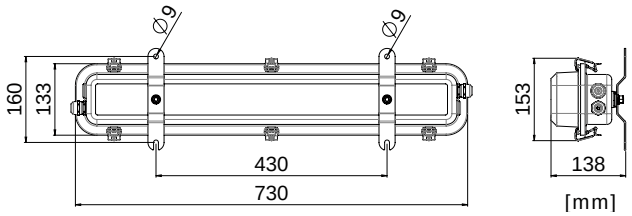

36 W

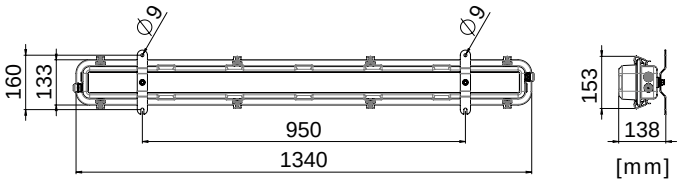

Extras

- Stainless steel housing
- Two cable glands on request

Spare parts	Part no.
Cover (2x 18 W)	7112001100
Cover (2x 36 W)	7112001200
Lamp holder G13	7111014000

Technical modification reserved without prior notice

Part no. 2x 18 W 5108000100
2x 36 W 5108000200

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	110-240 V AC
Frequency	50-60/0 Hz

Explosion proof luminaire, surface mounting

Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2G Ex de IIC T4 Gb II 2D Ex tb IIIC T80°C Db IP66
Housing	Reinforced polyester
Cover	Clear polycarbonate, impact-proof
Mounting	2 screw threads M8
Cable entry	1 Ex cable gland M25, 1 Ex blind plug M25
Ta	-20°C - +50°C
Protection class	IP66
Weight	5.1 kg (2x 18 W)/7.3 kg (2x 36 W)

2x 18 W

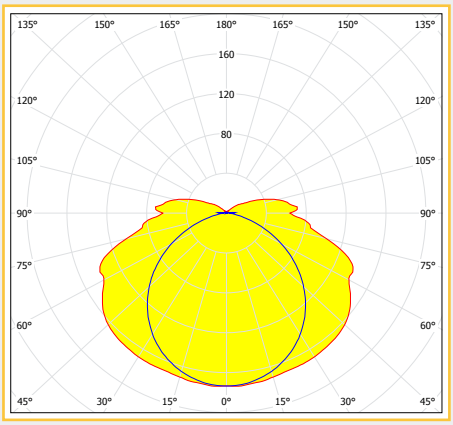

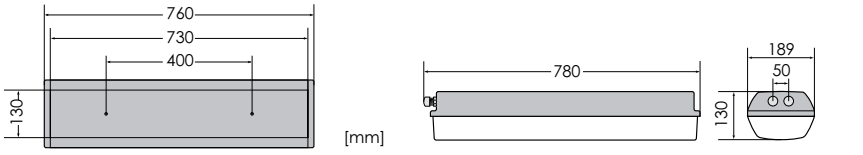

18 W

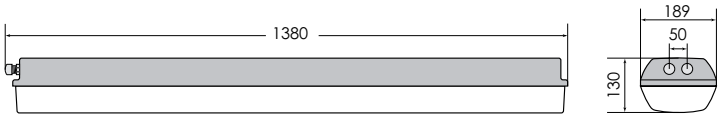

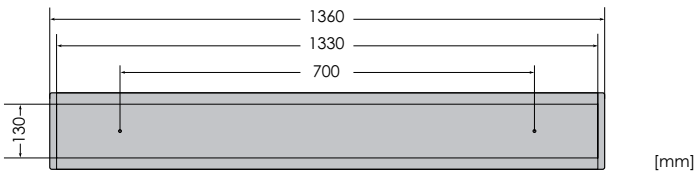

36 W

Extras

- Different fixing systems available
- Emergency battery back-up

Spare parts	Part no.
Cover (2x 18 W)	7112005500
Cover (2x 36 W)	7112005600

Technical modification reserved without prior notice

Part no. 2x 18 W 5108002200-003
2x 36 W 5108002400-003

Light source	T8 fluorescent tubes (not included)
Lamp Base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Explosion proof luminaire, surface mounting

Design	According to rules of maritime classification societies and relevant standards
Ex marking	II 2 G Eex d IIB T6
Housing	Aluminium, seewater resistant
Cover	Clear polycarbonate, impact-proof
Mounting	Hinged base
Cable entry	1 Ex cable gland M20, 1 Ex blind plug M20
Protection class	IP67
Weight	6.4 kg (2x 18 W)/9.3 kg (2x 36 W)

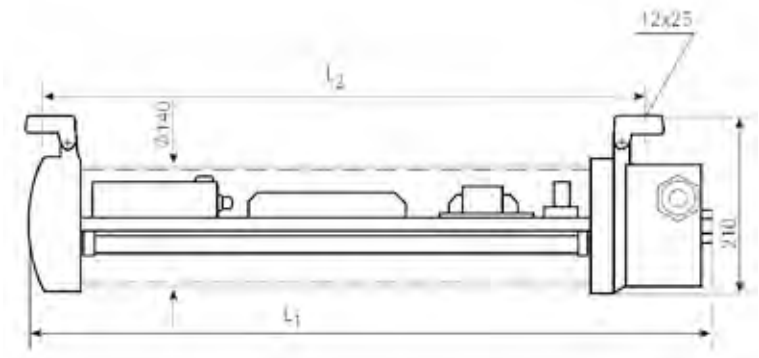

[mm]

Type	L1	L2
2x 18 W	803	717
2x 36 W	1413	1327

Extras

- 120 V AC execution
- Electromagnetic ballast
- Different cable glands available
- Emergency battery back-up

Technical modification reserved without prior notice

... with halfmoon

... with grid

Part no.	5127000200-049
w. halfmoon	5127000200-045
w. grid	5127000200-047

Decorative wall light for open decks

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 8.7 mm
Cable entry	2 grommets, IP67
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67
Weight	1.4 kg

Light source	Compact fluorescent lamp (not included)
Lamp base	G24q-2
Wattage	1x 18 W
Voltage	220-240 V AC
Frequency	50-60 Hz

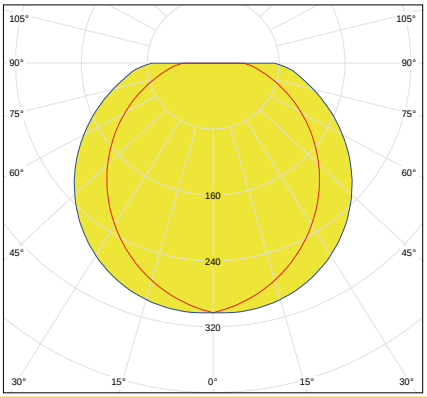

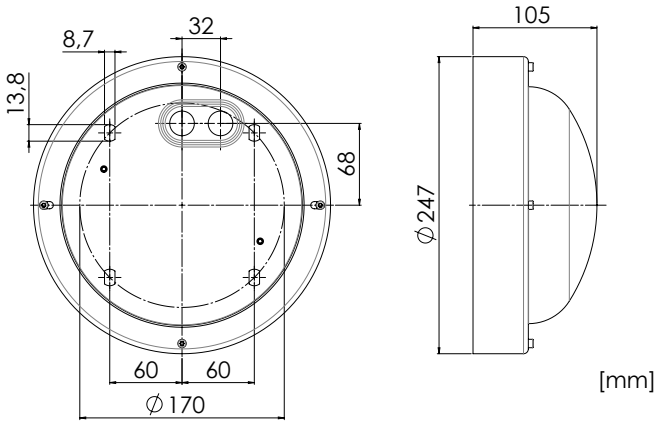

Front view/drilling template

Extras

- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different wattages on request
- Other finishes on request

Spare parts	Part no.
Diffuser	7112006200
Halfmoon cover	7112007300
Grid	7112015800
Lamp holder G24q-2	7111016200

Technical modification reserved without prior notice

Part no. 5202001900-xxx

Light source	Compact fluorescent lamp (not included)
Lamp base	E27
Wattage	1x 12 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Decorative wall light for open decks

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated white (RAL 9010)
Diffuser	Opal polycarbonate, impact-proof
Mounting	3 mounting holes, Ø 13 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67
Weight	4.0 kg

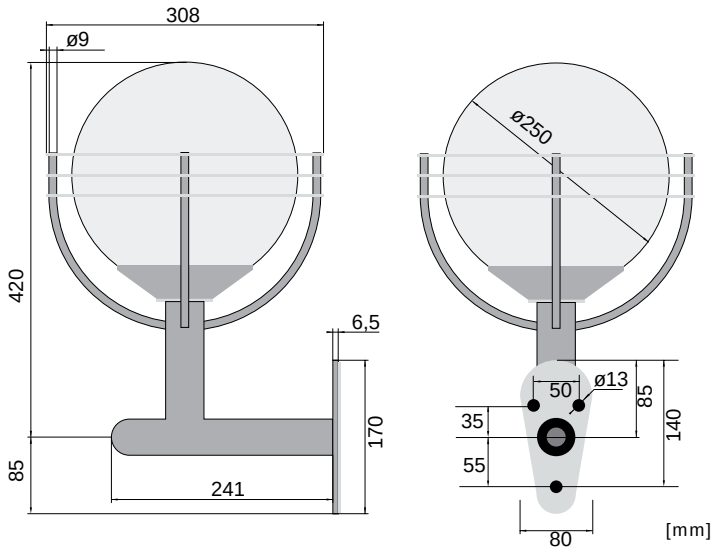

Extras

- 120 V AC execution
- Pole light with 1 or 2 globes
- Other colors on request

Spare parts	Part no.
Diffuser	7112002300

Technical modification reserved without prior notice

Type A

Type B

Type C

Part no. 5202000700-xxx

Light source	Compact fluorescent lamp (not included)
Lamp base	E27
Wattage	1x 12 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Decorative wall light for open decks

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated white (RAL 9010)
Diffuser	Opal polycarbonate, impact-proof
Mounting	Mounting holes
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67

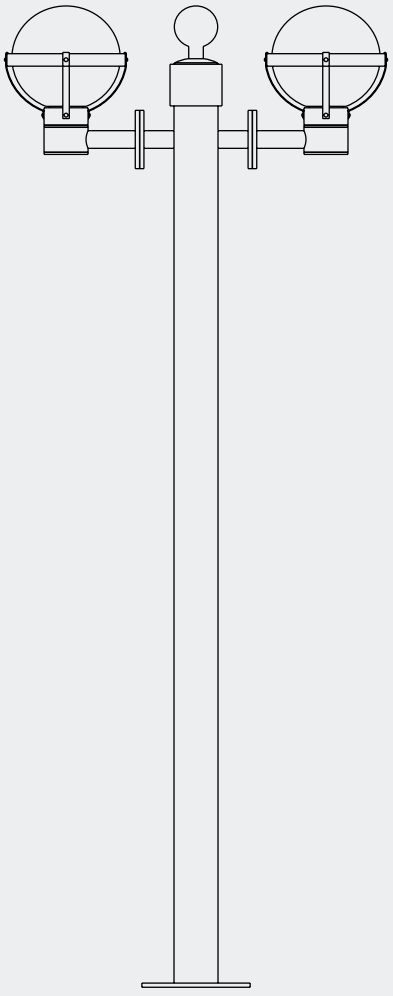

Type	Part no.	Weight
A	5202000700	4.2 kg
B	5202000700-003	3.7 kg
C	5202000700-004	3.7 kg

Extras

- 120 V AC execution
- Pole light with 2 globes
- Other colors on request

Technical modification reserved without prior notice

Part no. 5202000700-xxx

Type A

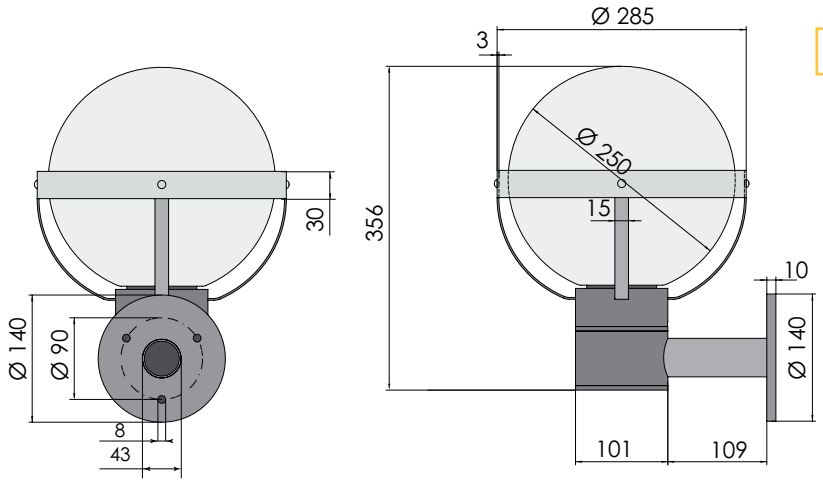

Type B

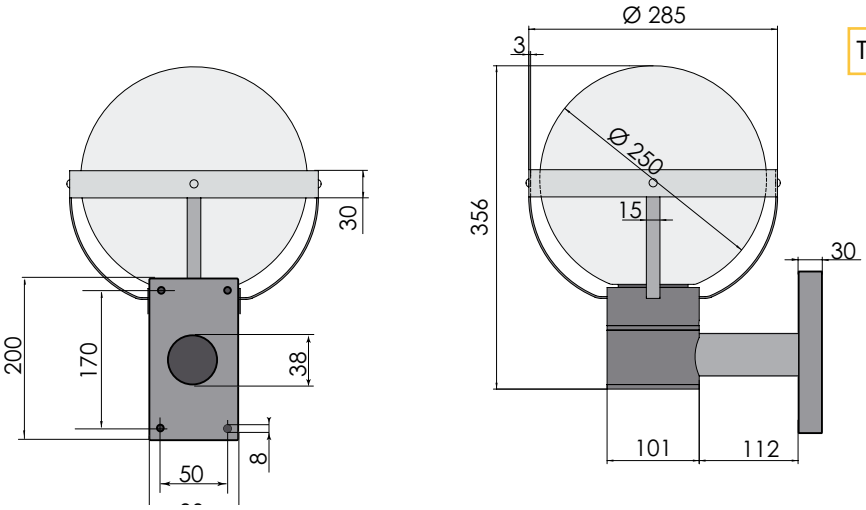

[mm]

Type C

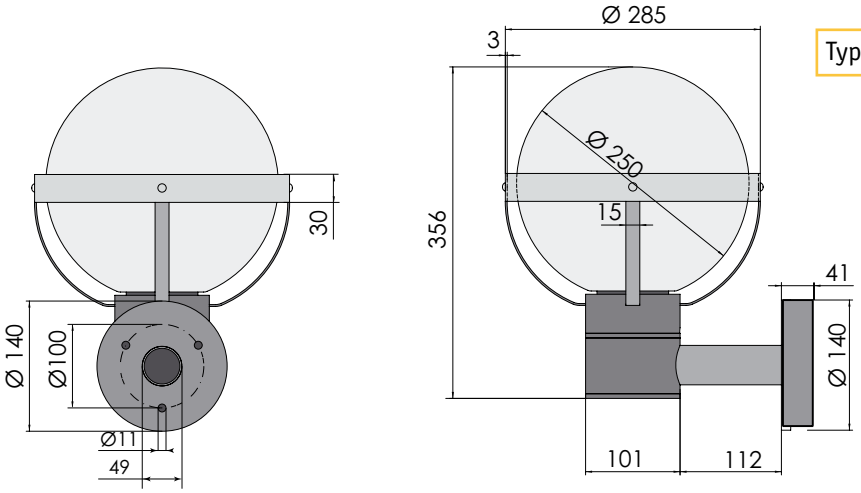

Spare parts	Part no.
Diffuser	7112001400

Technical modification reserved without prior notice

Wall and Ceiling Lum

inaires

Product	Page
DE02	50
DE16	51
DE16	52
DE29	54
DE29S	56
DE28	58
DE38	60
DE29XS	62
DE60	63
DE95DCC	64
DE22	66
KJ62	67

Part no. 2x 9 W 5111001500-016
1x 60 W 5111001600-001

Light source	Incandescent or compact fluorescent lamp (not included)
Wattage (lamp base)	2x 9 W (2G7) 1x 60 W (E27)
Voltage	220-240 V AC
Frequency	50-60 Hz

Recessed mounted ceiling luminaire for cabins, dining rooms and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Trim ring	Steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	8 mounting holes, Ø 4 mm
Cable entry	1 inlet for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP44 in conjunction with ceiling
Weight	Max. 1.3 kg

2x 9 W

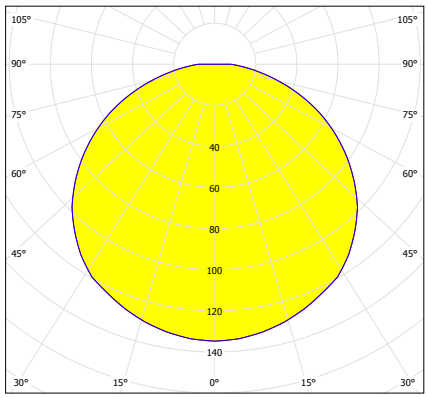

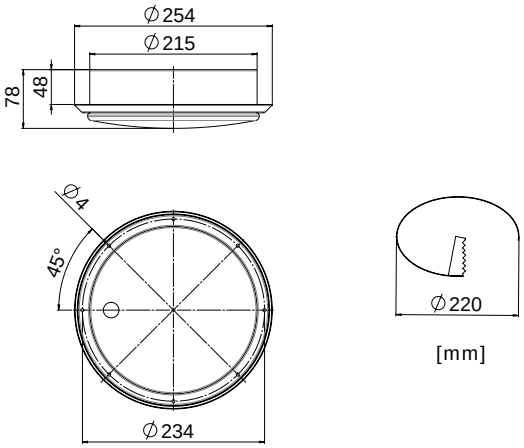

Extras

- 120 V AC execution
- B0- execution
- Electromagnetic ballast
- Chrome or gold plated trim ring
- Different cable entries on request
- Different wattages on request

Spare parts	Part no.
Trim ring RAL9016	7512000400
Diffuser	7112007500

Technical modification reserved without prior notice

Part no. 5111001300-019

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	2x 9 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Recessed mounted ceiling luminaire for passage ways, dining rooms and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30. IP44 in conjunction with ceiling
Weight	Max. 1.75 kg

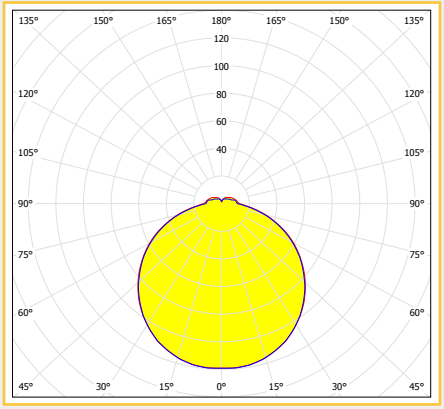

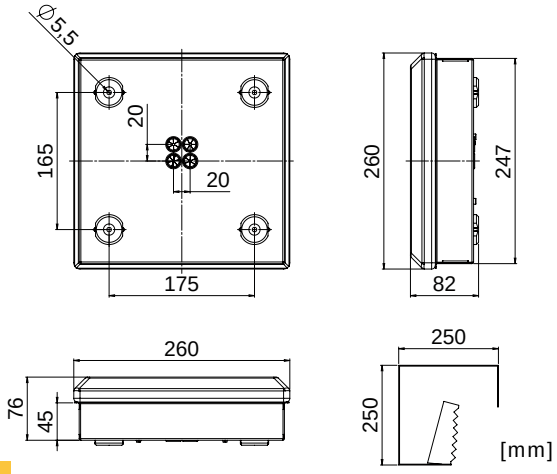

Extras

- 120 V AC execution
- Electromagnetic ballast
- Additional E14 lamp holder for emergency light
- B0- execution
- Different cable entries on request
- Different fitting systems available

Spare parts	Part no.
Diffuser	7112004700
Lamp holder 2G7	7111023400

Technical modification reserved without prior notice

Part no. 2x 18 W 5111000100-xxx
2x 36 W 5111000800-xxx

Lamps	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V

Recessed mounted ceiling luminaire for passage ways, cabins, dining rooms,accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof, UV resistant
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30. IP44 in conjunction with ceiling

2x 18 W

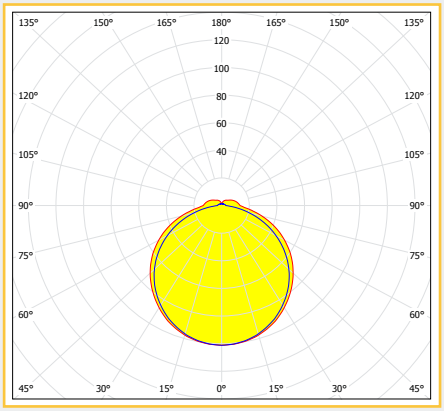

Type		Part no.	Weight
2x 18 W	50 Hz h.p.f.c	5111000100-003	3.6 kg
	60 Hz h.p.f.c	5111000100-005	3.6 kg
	50-60 Hz	5111000100-046	3.0 kg
2x 36 W	50 Hz h.p.f.c	5111000800-001	4.5 kg
	60 Hz h.p.f.c	5111000800-003	4.5 kg
	50-60 Hz	5111000800-023	3.8 kg

Extras

- 120 V AC execution
- 24 V DC execution
- LED execution
- Dimmable electronic ballast
- BO- execution
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Technical modification reserved without prior notice

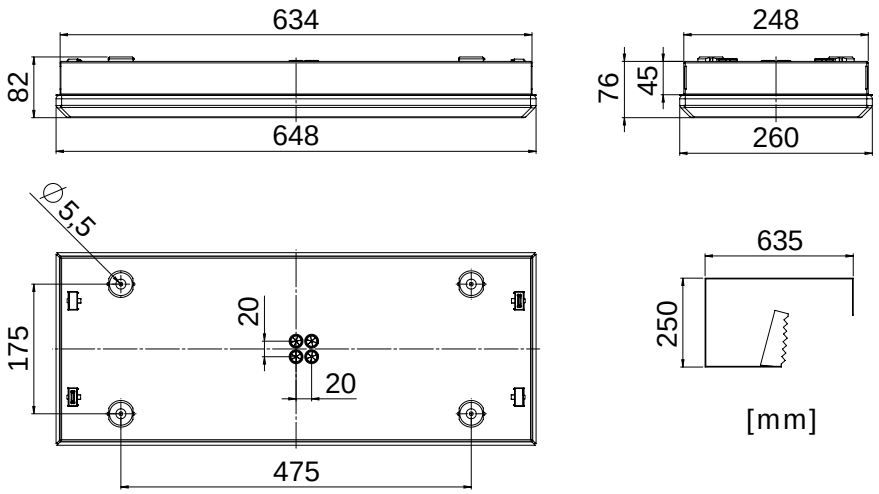

Part no. 5111000100-xxx

Spare parts	Part no.
Diffuser 18 W	7112000600
Lamp holder G13 (4 pcs)	7111000500
w. starter holder (4 pcs.)	7111001000

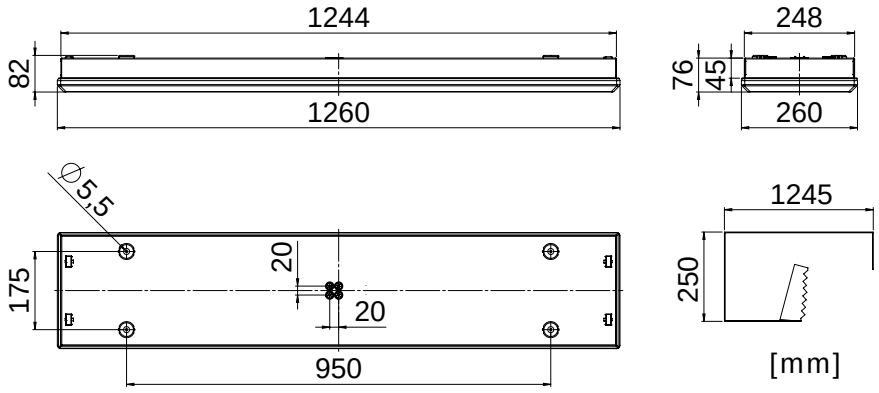

Part no. 5111000800-xxx

Spare parts	Part no.
Diffuser 36 W	7112000700
Lamp holder G13 (4 pcs.)	7111000500
w. starter holder (4 pcs.)	7111001000

with louver

with icecrystal diffuser

Part no. 2x 18 W 5111005400-050
2x 36 W 5111005900-013

Lamps	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

2x 18 W

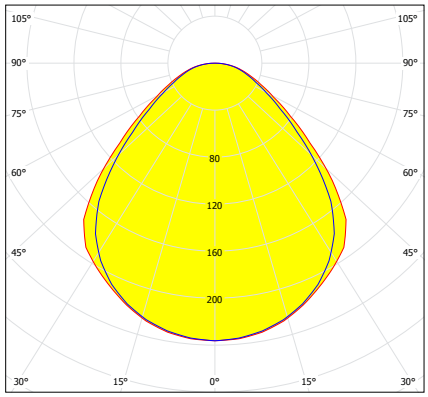

Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	Mounting set for ceilings 23-55 mm
Cable entry	2 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	With diffuser pane: IP44 in conjunction with ceiling With louver: IP20
Weight	3.5 kg (2x 18 W) / 6.0 kg (2x 36 W)

Extras

- T5 execution (14 W, 24 W, 28 W, 50 W)
- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different louvers and diffusers on request
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Technical modification reserved without prior notice

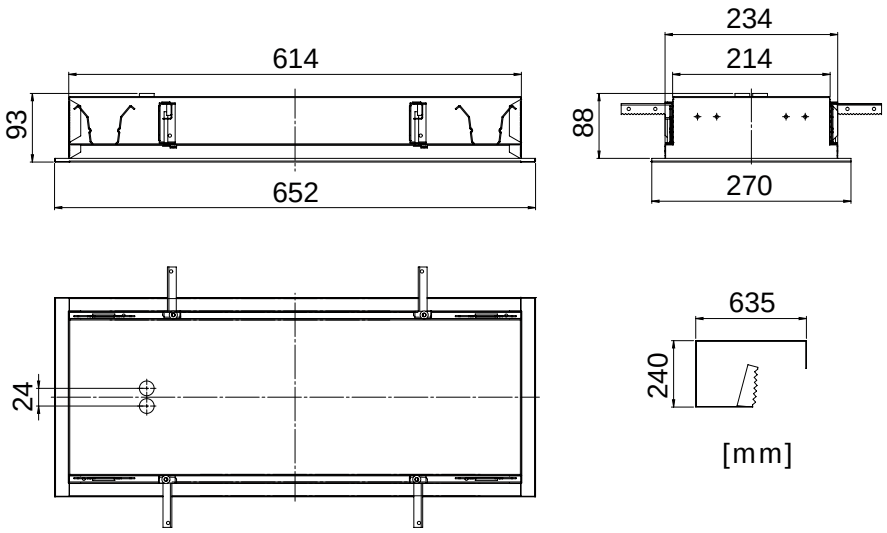

Part no. 5111005400-xxx

Spare parts	Part no.
Frame w.diffuser 18 W	7931000900
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000

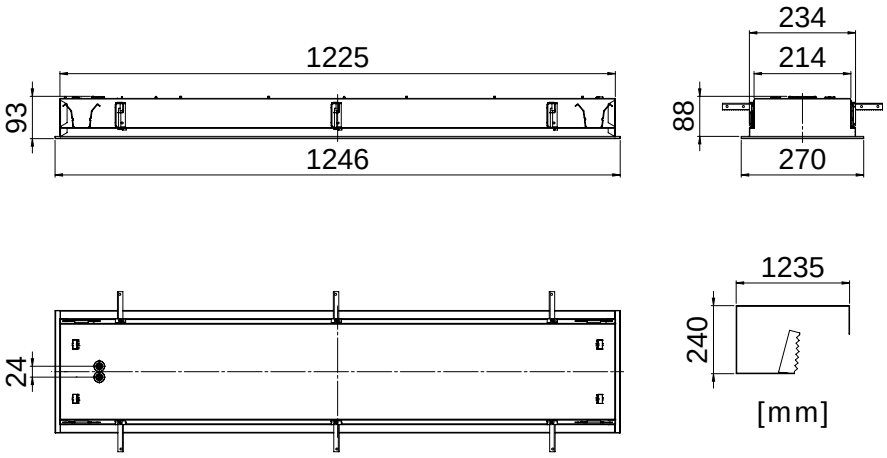

Part no. 5111005900-xxx

Spare parts	Part no.
Frame w.diffuser 36 W	7931002000
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000

with louver

with icecrystal diffuser

Part no. 2x 18 W 5111005600-015
2x 36 W 5111005000-017

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

2x 18 W

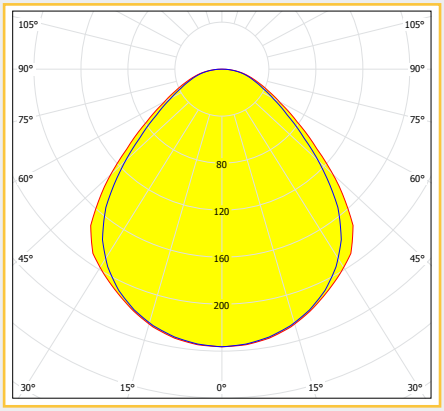

Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9010)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	Mounting set for ceilings 23-55 mm
Cable entry	2 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	With diffuser pane: IP44 in conjunction with ceiling With louver: IP20
Weight	3.3 kg (2x 18 W) / 5.5 kg (2x 36 W)

Extras

- T5 execution (14 W, 24 W, 28 W, 50 W)
- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different louvers and diffusers on request
- Different housing colors on request
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Technical modification reserved without prior notice

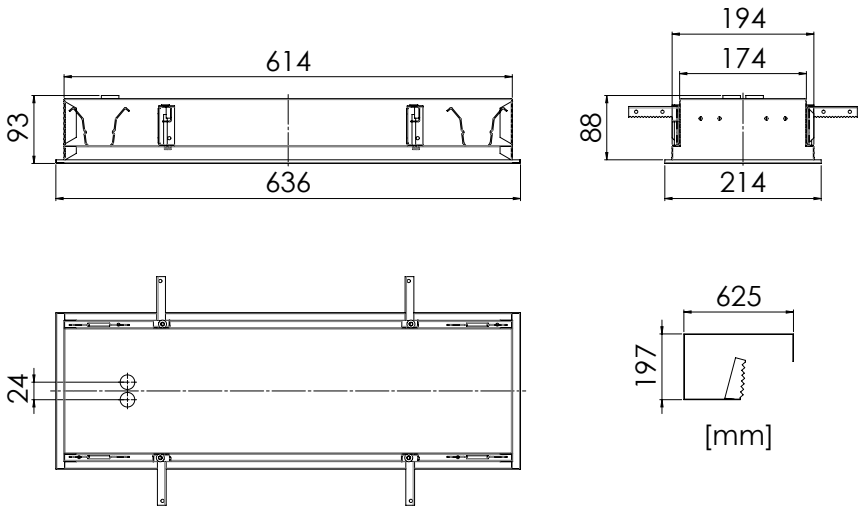

Part no. 5111005600-xxx

Spare parts	Part no.
Frame w.diffuser 18 W	7112026800
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000
Mounting set	7501001800

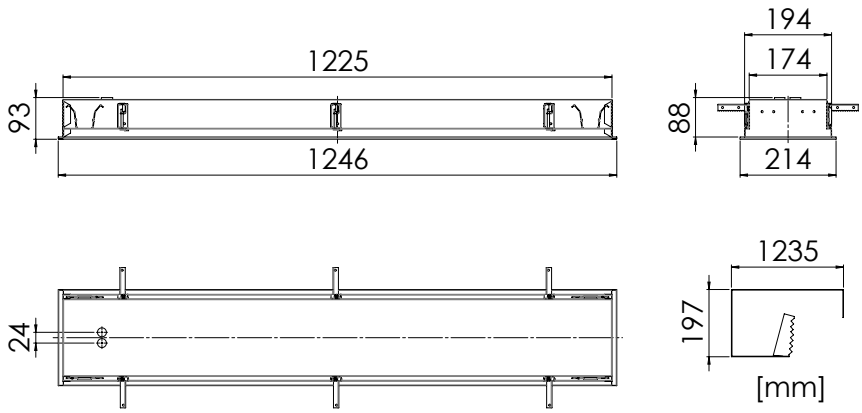

Part no. 5111005000-xxx

Spare parts	Part no.
Frame w.diffuser 36 W	7112021800
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000
Mounting set	7501001800

Part no. 2x 18 W 5111000600-xxx
2x 36 W 5111002500-xxx

Lamps	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V
Frequency	50-60 Hz

Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	4 mounting brackets for ceilings max. 35 mm
Cable entry	4 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP44 in conjunction with ceiling
Weight	3.5 kg (2x 18 W) / 6.0 kg (2x 36 W)

2x 18 W

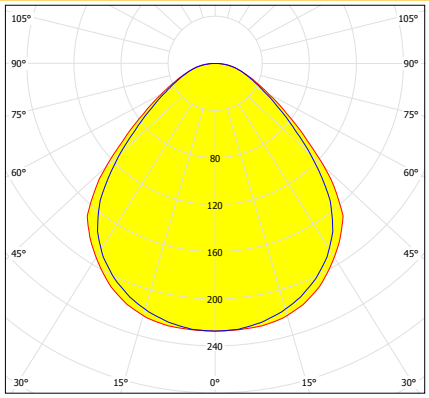

Extras

- T5 execution (14 W, 24 W, 28 W, 50 W)
- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Different diffusers on request
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Technical modification reserved without prior notice

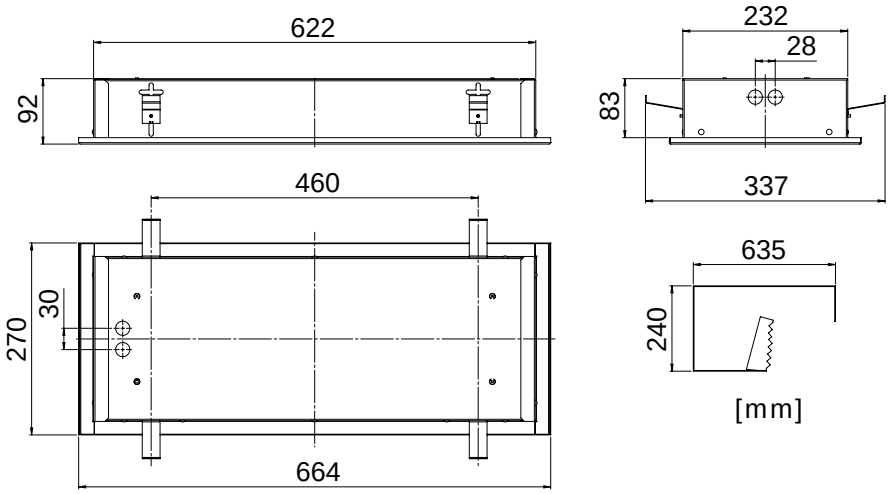

Part no. 5111000600-xxx

Spare parts	Part no.
Diffuser	7112006300
Lamp holder G13	7111021500

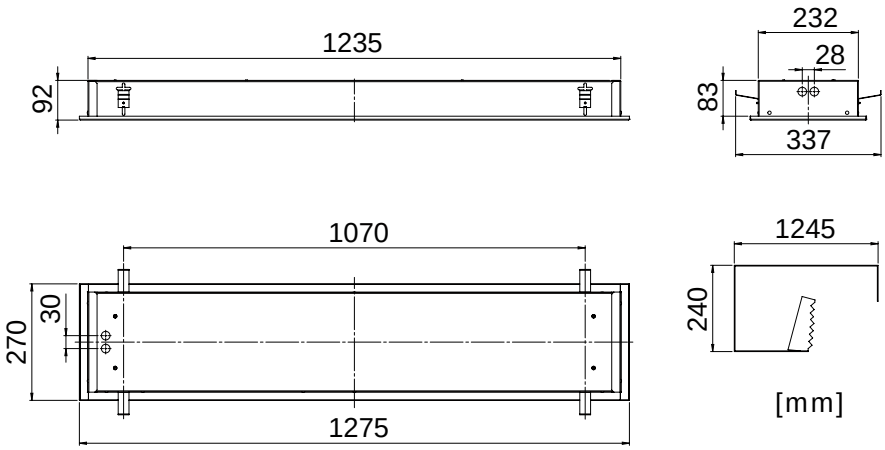

Part no. 5111002500-xxx

Spare parts	Part no.
Diffuser	7112010300
Lamp holder G13	7111021500

with louver

with icecrystal diffuser

Part no. 2x 18 W 5111001202-xxx
2x 36 W 5111007200-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

2x 18 W

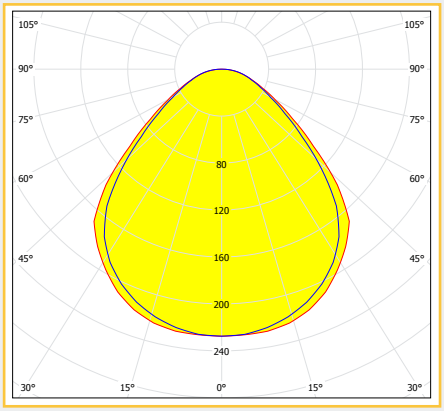

Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	Mounting set for ceilings 23-55 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	With diffuser pane: IP44 in conjunction with ceiling With louver: IP20
Weight	4.0 kg (2x 18 W) / 9.0 kg (2x 36 W)

Extras

- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- BO- execution
- Different louvers and diffusers on request
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Technical modification reserved without prior notice

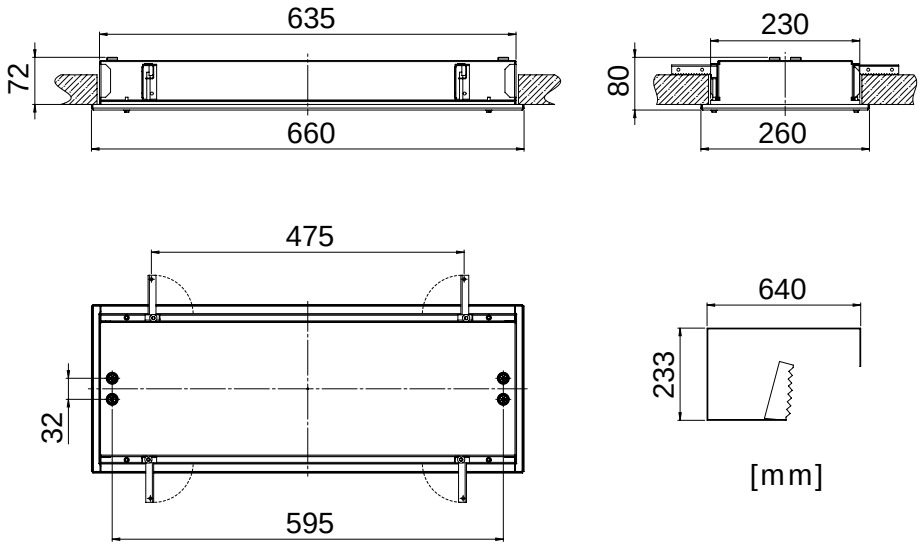

Part no. 5111001202-xxx

Spare parts	Part no.
Diffuser w. frame	7931001200
Lamp holder G13, kit	7111023500
Mounting set	7501001800

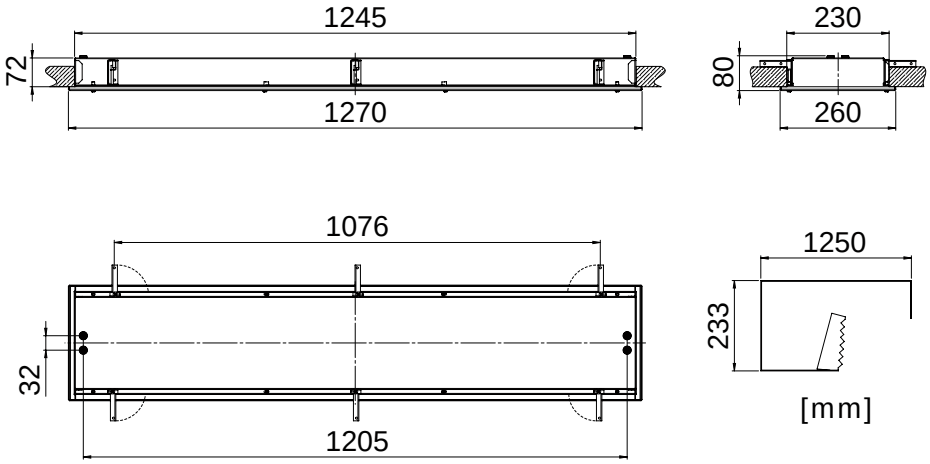

Part no. 5111007200-xxx

Spare parts	Part no.
Diffuser w. frame	7931002100
Lamp holder G13, kit	7111023500
Mounting set	7501001800

Part no. 5111006100-001

Light source	Compact fluorescent lamp (not included)
Lamp base	2G11
Wattage	1x 18 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Recessed mounted ceiling luminaire for passage ways, cabins, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal PMMA
Mounting	Mounting set for ceilings 23-55 mm
Cable entry	2x inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP44 in conjunction with ceiling
Weight	2.1 kg

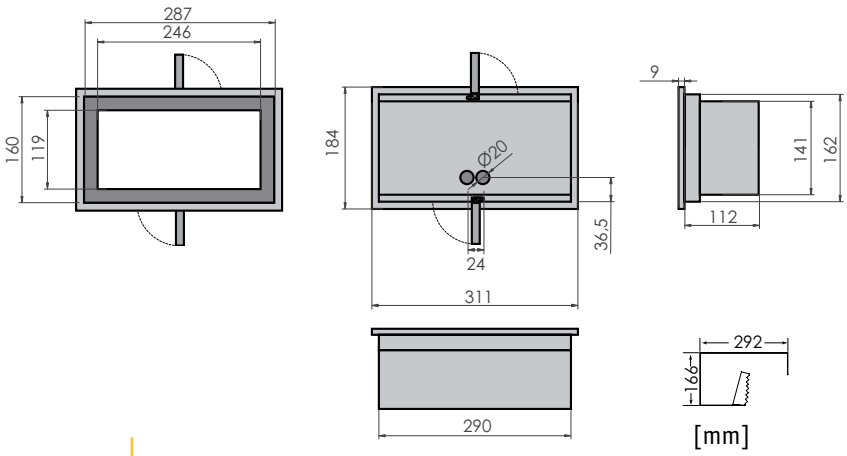

Extras

- Electromagnetic ballast
- Different louvers and diffusers on request
- Different cable entries on request
- Emergency battery back-up

Technical modification reserved without prior notice

Part no. 5111004000-005

Light source	Compact fluorescent lamp (not included)
Lamp base	2G11
Wattage	2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

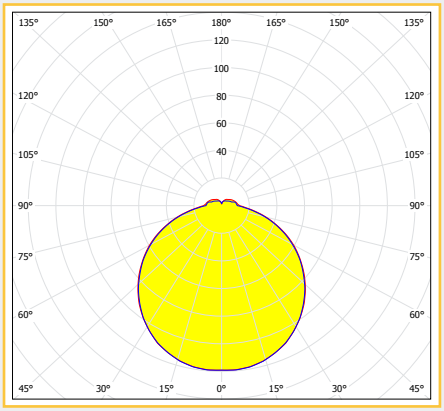

Recessed mounted ceiling luminaire for installation in panel ceilings 600 x 600 mm

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9010)
Reflector	Primary reflector: white steel, semicircular section, with lay-in opal plastic foil Secondary reflector: white coated aluminium, parabolic
Mounting	4 mounting brackets
Cable entry	2 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20
Weight	6.1 kg

[mm]

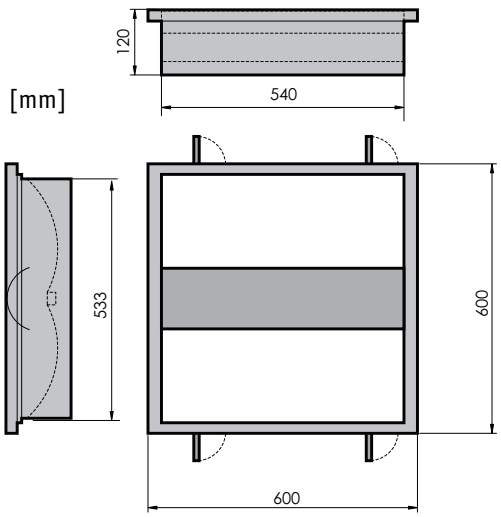

Extras

- 120 V AC execution
- Different wattages and voltages on request
- Emergency battery back-up
- Execution for different ceiling systems available

Technical modification reserved without prior notice

with louver

with icecrystal diffuser

Ceiling luminaire for recessed installation in panel ceilings (DAMPA DCC 300)

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Clear polycarbonate with ice crystal structure
Mounting	Mounting brackets and side rails
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	With diffuser pane: IP44 in conjunction with ceiling With louver: IP20
Weight	4.6 kg (2x 18 W) / 8.5 kg (2x 36 W)

Extras

- 120 V AC execution
- LED execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Emergency battery back-up
- Different louvers and diffusers on request
- Alternative housing colors on request

Part no. 2x 18 W 5111007300-xxx
2x 36 W 5111007400-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

2x 18 W

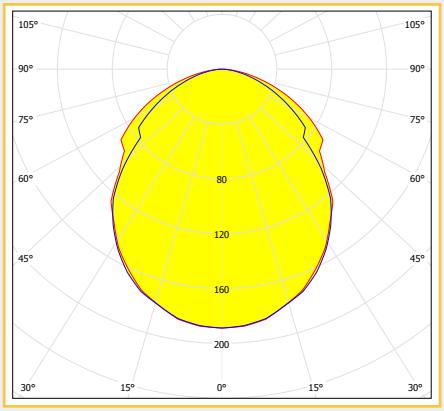

2x 36 W

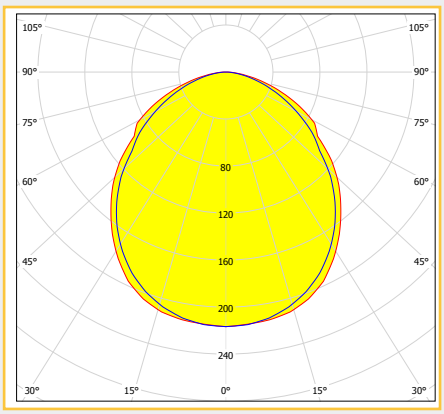

Technical modification reserved without prior notice

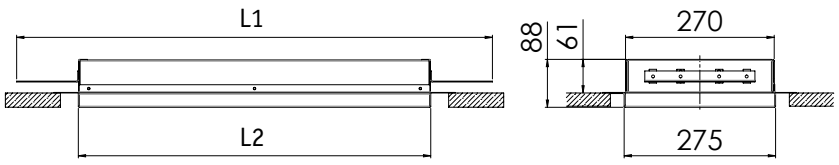

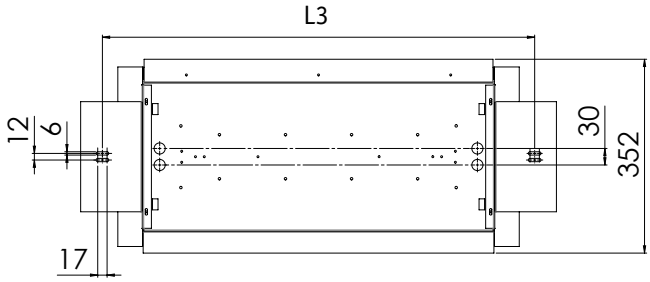

[mm]

Part no. 2x 18 W 5111007300-xxx
2x 36 W 5111007400-xxx

Type	L1	L2	L3
2x 18 W	864	640	785
2x 36 W	1477	1250	1398

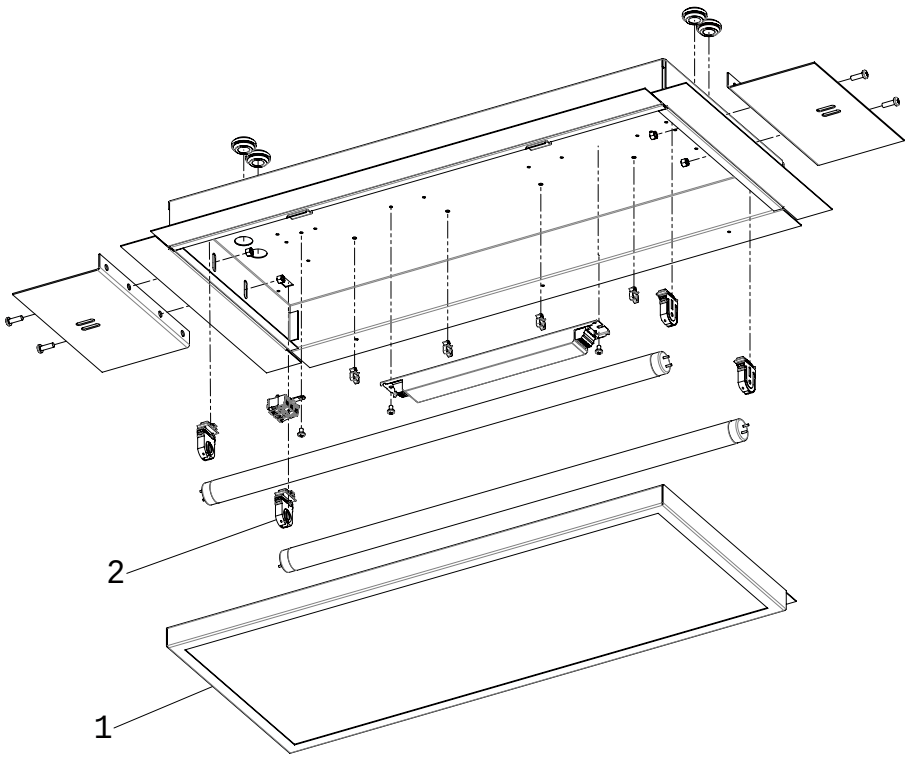

Spare parts	Part no.
1a Diffuser w. frame 18W	7931001300
1b Diffuser w. frame 36W	7931001400
2 Lamp holder G13	7111002700

Part no. 2x 18 W 5111001000-010
2x 36 W 5111001100-007

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V
Frequency	50-60 Hz

Recessed mounted ceiling luminaire for passage ways, lounges, dining rooms, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Aluminium mirror louver
Mounting	Mounting set for ceilings 23-55 mm
Cable entry	2 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20
Weight	3.2 kg (2x 18 W) / 6.0 kg (2x 36 W)

2x 18 W

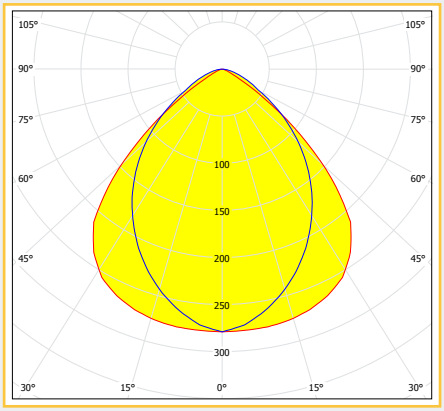

2x 36 W

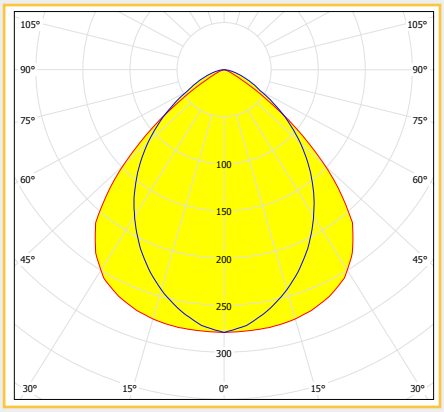

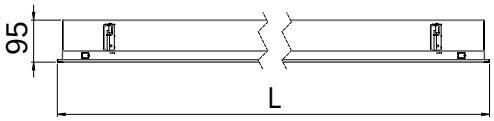

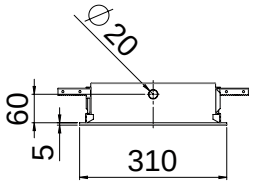

Type	L	X
2x 18 W	622	614
2x 36 W	1247	1229



[mm]

Extras

- T5 execution (14 W, 24 W, 28 W, 54 W)
- 120 V AC execution
- Dimmable electronic ballast
- White steel louver, parabolic mirror louver
- Emergency battery back-up

Spare parts	Part no.
Louver (18 W)	7112033100
Louver (36 W)	7112016200
Lamp holder kit (18 W)	7111024000
Lamp holder kit (36 W)	7111024100
Mounting set	7501001800

Technical modification reserved without prior notice

Part no. 5116000100-022

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	1x 7 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Recessed mounted berth light for cabins

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate
Mounting	4 mounting holes, Ø 3.2 mm
Switch	On / off switch, 2-pole
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20
Weight	0.6 kg

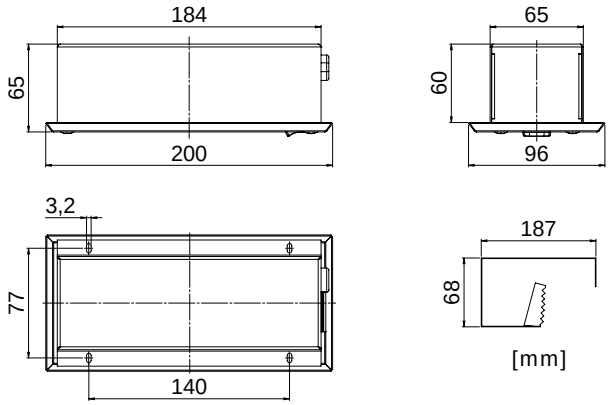

Extras

- 120 V AC execution
- Electromagnetic ballast
- Different connectors on request
- Other finish on request

Spare parts	Part no.
Electronic ballast	7102020800
Switch, white	7201000100
Lamp holder 2G7	7111019800

Technical modification reserved without prior notice

Wall and Ceiling Lum

Product	Page
DA30	70
DA110	71
DA16	72
DA16F	73
DA16F	74
EL33	76
EL66	77
EL14	78
KJ144	79
KJ56	80
KJ15	81
LL15	82
LL17	83
SP66	84

Part no. 2x 9 W 5112000100-xxx
2x 11 W 5112001000-xxx

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	2x 9 W 2x 11 W
Voltage	220-240 V
Frequency	50-60 Hz

Surface mounted ceiling luminaire for cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Polycarbonate, white
Diffuser	PMMA opal
Mounting	4 mounting holes, Ø 4.0 mm
Cable entry	1 inlet for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP54
Weight	0.6 kg (2x 9 W) / 1.3 kg (2x 11 W)

2x 9 W

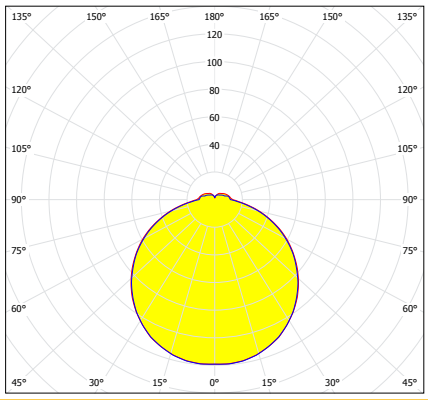

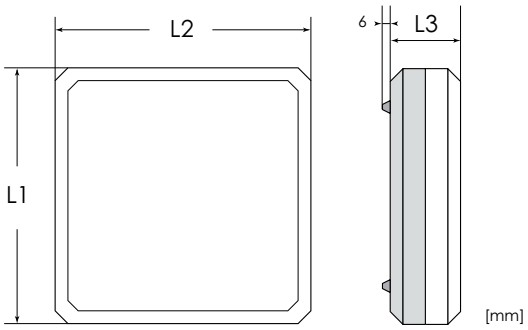

Type	L1	L2	L3
2x 9 W	200	200	58
2x 11 W	300	300	83

Extras

120 V AC execution

24 V DC execution

Spare parts	Part no.
Diffuser 2x 9 W	7112008100
Diffuser 2x 11 W	7112008000
Lamp holder 2G7	7111023400

Technical modification reserved without prior notice

Part no. 2x 14 W 5112005000-001
2x 28 W 5112005300-001

Light source	T5 fluorescent tubes (not included)
Lamp base	G5
Wattage	2x 14 W 2x 28 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted ceiling luminaire for passage ways, cabins, lounges, dining rooms and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white
End caps	White polycarbonate
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	2 cable entries Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20
Weight	1.7 kg (2x 14 W) / 3.3 kg (2x 28 W)

2x 14 W

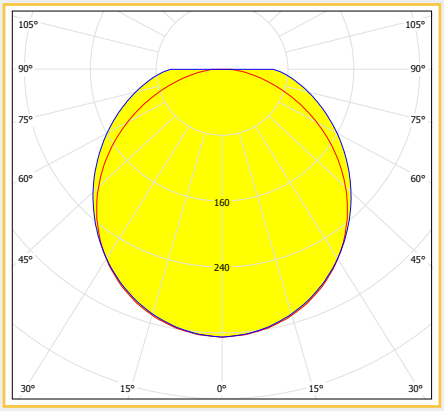

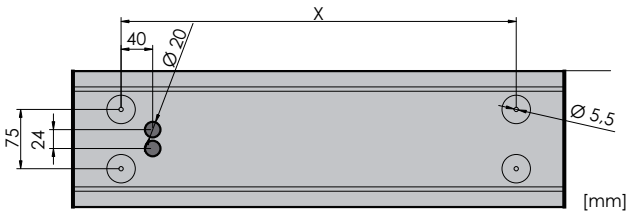

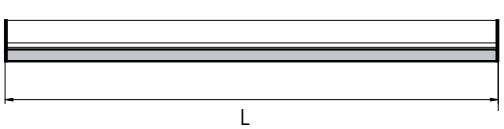



Type	L	X
2x 14 W	623	500
2x 28 W	1270	980

Extras

- 120 V AC execution
- LED execution
- Dimmable electronic ballast

Spare parts	Part no.
Diffuser 2x 14 W	7112021600
Diffuser 2x 28 W	7112031900
Lamp holder G5	7111016000
End cap	7504000600

Technical modification reserved without prior notice

Part no. 2x 18 W 5112000400-xxx
2x 36 W 5112000300-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted ceiling luminaire for passage ways, cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.8 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP43
Weight	2.7 kg (2x 18 W) / 4.4 kg (2x 36 W)

2x 18 W

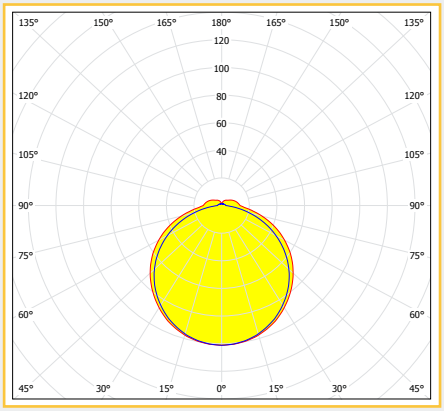

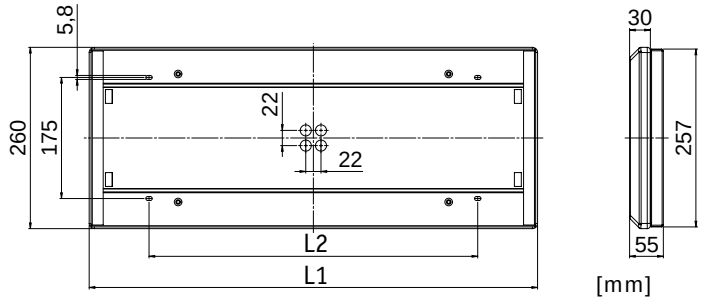

Type	L1	L2
2x 18 W	648	475
2x 36 W	1260	950

Extras

- 120 V AC execution
- Dimmable electronic ballast
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Spare parts	Part no.
Diffuser 18 W	7112000600
Diffuser 36 W	7112000700
Lamp holder G13	7111002700

Technical modification reserved without prior notice

Part no. 5112002800-009

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	2x 11 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Superflat surface mounted ceiling luminaire for passage ways, cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.8 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP43
Weight	1.1 kg

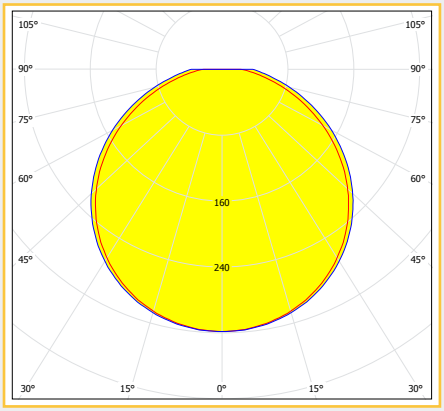

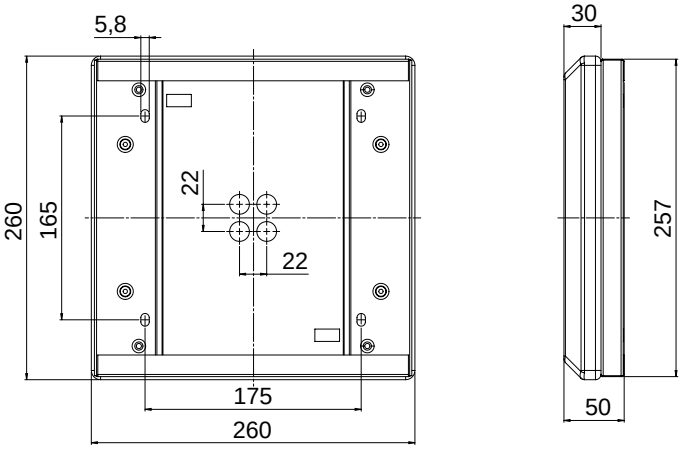

[mm]

Extras

120 V AC execution

Different cable entries on request

Spare parts	Part no.
Diffuser	7112004700
Lamp holder 2G7	7111023400

Technical modification reserved without prior notice

Part no. 2x 18 W 5112003000-007
2x 36 W 5112003100-009

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	2x 18 W 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Superflat surface mounted ceiling luminaire for passage ways, cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.8 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP43
Weight	2.6 kg (2x 18 W) / 4.2 kg (2x 36 W)

2x 18 W

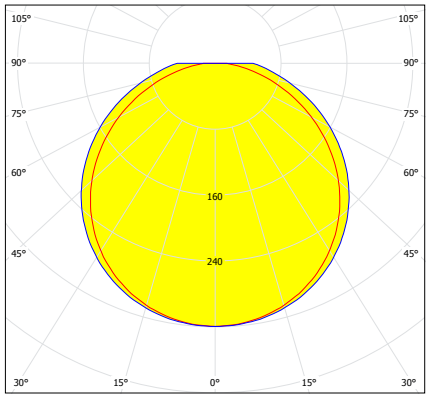

2x 36 W

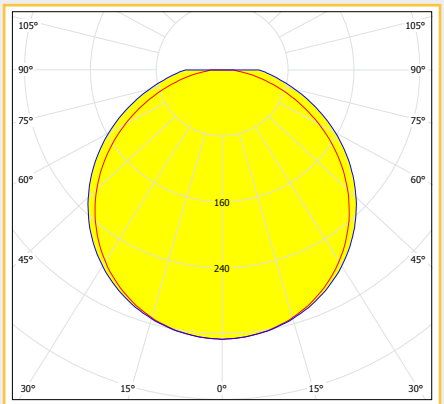

Extras

- 120 V AC execution
- T5 execution (14 W, 24 W, 28 W)
- LED execution
- Dimmable electronic ballast
- Different cable entries on request
- Additional E14 lamp holder for emergency light
- Emergency battery back-up

Technical modification reserved without prior notice

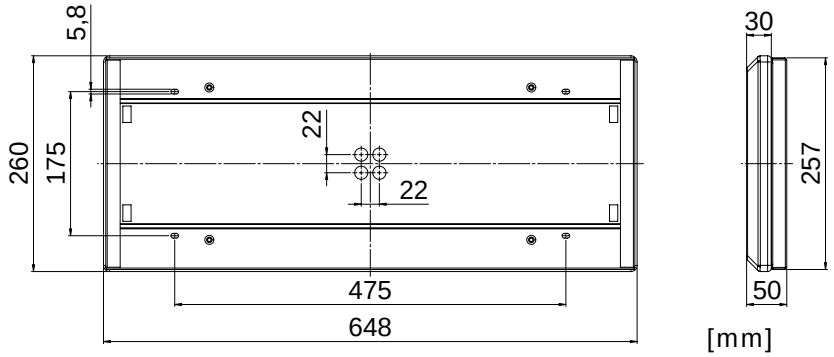

Part no. 5112003000-xxx

Spare parts	Part no.
Diffuser 18 W	7112000600
Lamp holder G13	7111002700

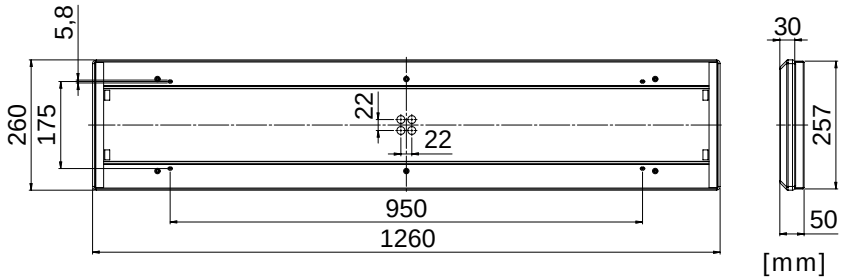

Part no. 5112003100-xxx

Spare parts	Part no.
Diffuser 36W	7112000700
Lamp holder G13	7111002700

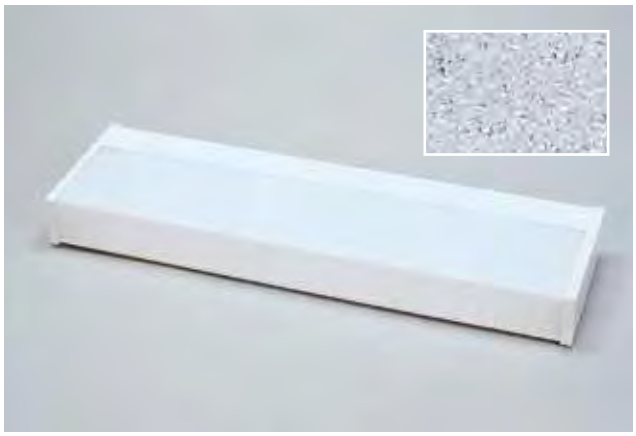

Part no. 2x 18 W 5113000400-xxx
2x 36 W 5113000600-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	1x / 2x 18 W 1x / 2x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted cornice luminaire for floor areas, passage ways, cabins, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Diffuser	Opal or crystal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	6 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30
Weight	3.0 kg (2x 18 W)/ 4.5 kg (2x 36 W)

2x 18 W

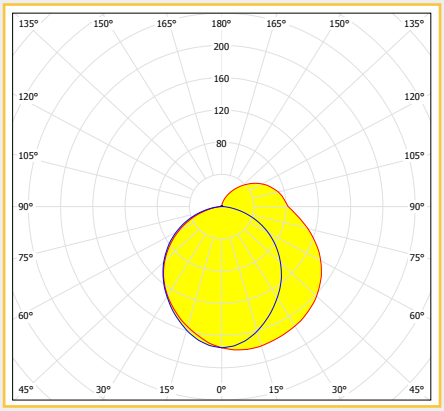

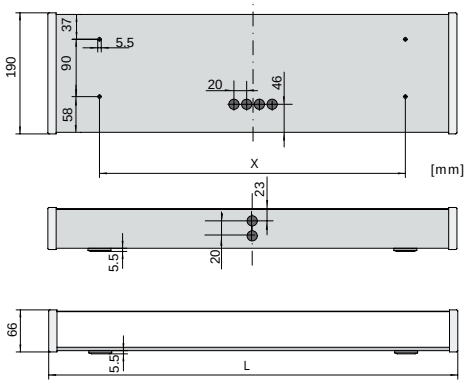

Type	L	X
18 W	645	480
36 W	1252	967

Extras

- 120 V AC execution
- Dimmable electronic ballast
- Electromagnetic ballast
- LED execution
- Emergency lamp holder E14
- 2-pole switch
- Emergency battery backup

Spare parts	Part no.
Opal diffuser 18 W	7112006900
Crystal diffuser 18 W	7112006800
Opal diffuser 36 W	7112001800
Crystal diffuser 36 W	7112001500
End cap	7503000300
Lamp holder G13	7111023600

Technical modification reserved without prior notice

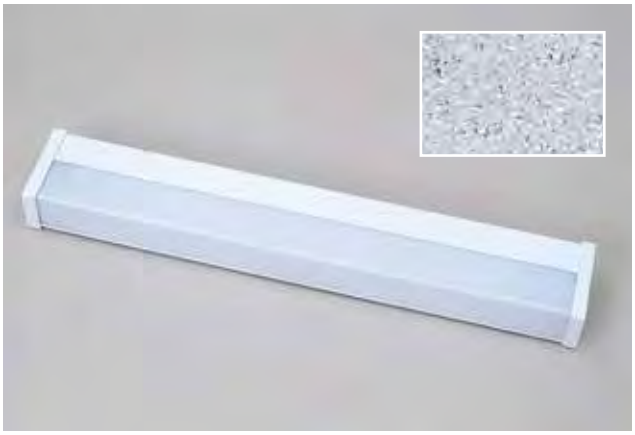

Part no. 1x 18 W 5113001000-xxx
1x 36 W 5113001100-xxx

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	1x 18 W 1x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted cornice luminaire for floor areas, passage ways, cabins, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Diffuser	Opal or crystal polycarbonate, impact-proof
Mounting	5 mounting holes, Ø 5.5 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30
Weight	1.7 kg (18 W) / 2.8 kg (36 W)

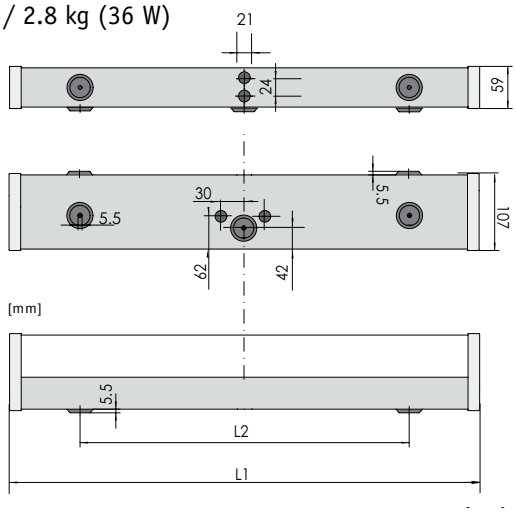

Type	L1	L2
1x 18 W	642	480
1x 36 W	1253	968

Extras

- 120 V AC execution
- Dimmable electronic ballast
- Electromagnetic ballast
- Emergency lamp holder E14
- 2-pole switch
- Emergency battery backup

Spare parts	Part no.
Opal diffuser 18 W	7933000300
Crystal diffuser 18 W	7933000400
Opal diffuser 36 W	7933000500
Crystal diffuser 36 W	7933000600
End cap	7503000400
Lamp holder G13	7111023600

Technical modification reserved without prior notice

Part no. 1x 14 W 5113002300-001
1x 28 W 5113002400-001

Light source	T5 fluorescent tubes (not included)
Lamp base	G5
Wattage	1x 14 W 1x 28 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Surface mounted cornice luminaire for floor areas, passage ways, cabins, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Diffuser	Opal polycarbonate, impact-proof
Mounting	2/ 4 mounting holes, Ø 5.5 mm
Cable entry	2 cable entries Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30
Weight	1.2 kg (14 W) / 2.1 kg (28 W)

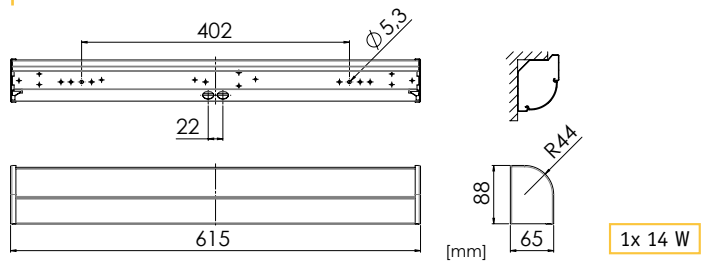

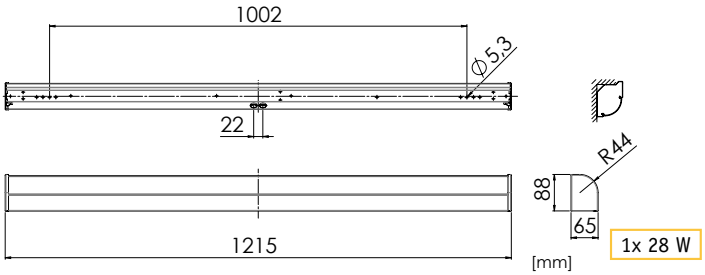

Extras

120 V AC execution

LED execution

Spare parts	Part no.
Diffuser 14 W	7933000100
Diffuser 28 W	7933000200
End cap left	7504000400
End cap right	7504000500
Lamp holder G5 (4 pcs)	7111002900

Technical modification reserved without prior notice

Part no.		
	11 W TC	5117000800-005
	18 W T8	5117001200-005

Light source	Compact or T8 fluorescent lamp (not included)
Wattage	1x 11 W (2G7)
(Lamp base)	1x 18 W (G13)
Voltage	220-240 V AC
Frequency	50-60 Hz

Berth light with switch for accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white
End caps	White polycarbonate
Diffuser	Opal polycarbonate
Switch	On / off switch, 2-pole
Mounting	2 mounting holes, Ø 5.5 mm
Cable entry	2 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30
Weight	0.8 kg (11 W) / 1.9 kg (18 W)

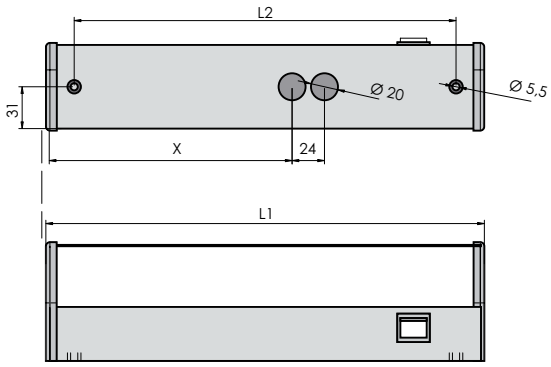

[mm]



Type	L1	L2	X
1x 11 W	325	283	180
1x 18 W	675	550	326

Extras

120 V AC execution

LED execution

Spare parts	Part no.
Diffuser 11 W	7112020200
Diffuser 18 W	7112028900
End cap left	7504000400
End cap right	7504000500
Lamp holder G13 (4 pcs)	7111018300
w. spring (4 pcs)	7111019000
Lamp holder 2G7	7111019700

Technical modification reserved without prior notice

Part no. 5117000200-021

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	1x 7 / 9 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Berth light with switch, slim design, ideal for Pullman berths

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Diffuser	Opal polycarbonate
Switch	On / off switch, 2-pole
Mounting	2 mounting holes, Ø 5.5 mm
Cable entry	Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP30
Weight	0.5 kg

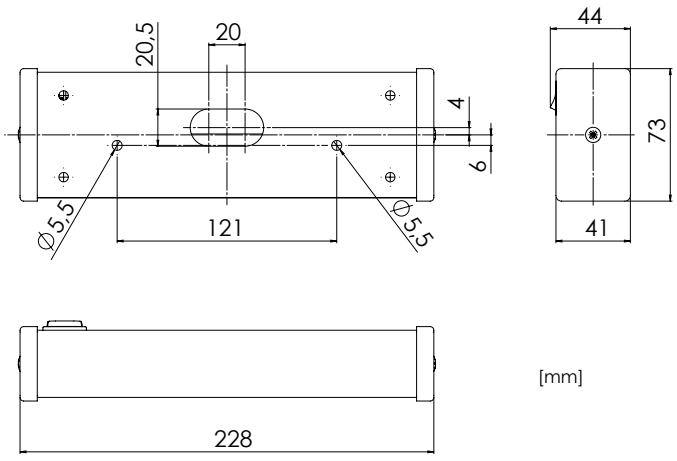

[mm]

Extras

- 120 V AC execution
- LED execution
- Electromagnetic ballast

Spare parts	Part no.
Diffuser	7112001300
End caps (2 pcs)	7504000100
Lamp holder 2G7	7111019800

Technical modification reserved without prior notice

Part no. 5117000xxx-xxx

Light source	Compact fluorescent or incandescent lamp (not included)
Voltage	230 V AC
Frequency	50 or 60 Hz

Berth light with switch and swivelling reflector for cabins and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Reflector	Galvanized steel, powder coated white (RAL9016)
Switch	On / off switch, 2-pole
Socket	Type B with universal socket
Mounting	2 mounting holes, Ø 5.5 mm
Cable entry	Ø 16.5 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20

Type A

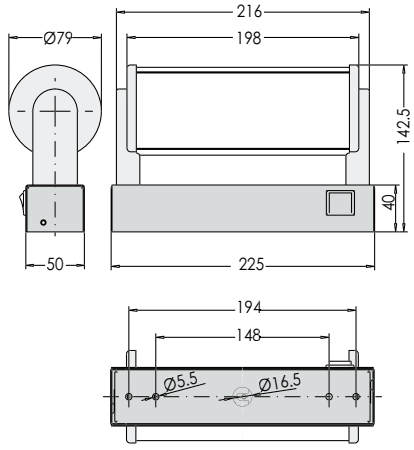

Type B

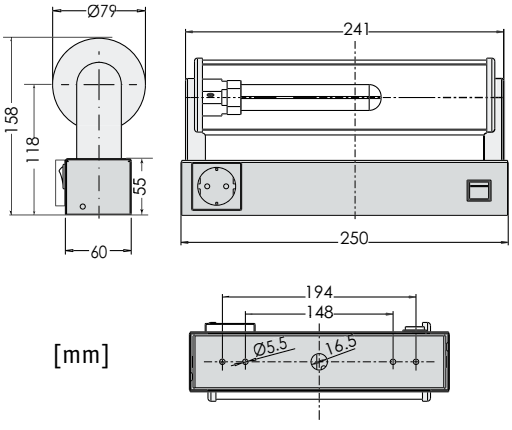

[mm]

Type	Wattage	Lamp base	Hz	Part no.	Weight
A	40 W	E27	50-60	5117000300-003	0.8 kg
	7/9 W	G23	50	5117000300-005	1.1 kg
	7/9 W	G23	60	5117000300-007	1.1 kg
B	40 W	E27	50-60	5117000400-003	1.0 kg
	7/9 W	G23	50	5117000400-005	1.3 kg
	7/9 W	G23	60	5117000400-007	1.3 kg

Extras

- 120 V AC execution
- US socket on request
- Different lamp holders on request (E14, B22d, G24d-1)
- Different wattage on request (10/13 W, 5 W)

Spare parts	Part no.
End cap	7112018600

Technical modification reserved without prior notice

Part no. 1x 18 W 5118005400-001
1x 36 W 5118005500-002

Light source	T8 fluorescent tubes (not included)
Lamp base	G13
Wattage	1x 18 W 1x 36 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Batten luminaire for cabins, shops and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Mounting	2 mounting holes, Ø 5.5 mm
Cable entry	1 cable entry, Ø 16 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20
Weight	0.7 kg (18 W)/ 1.2 kg (36 W)

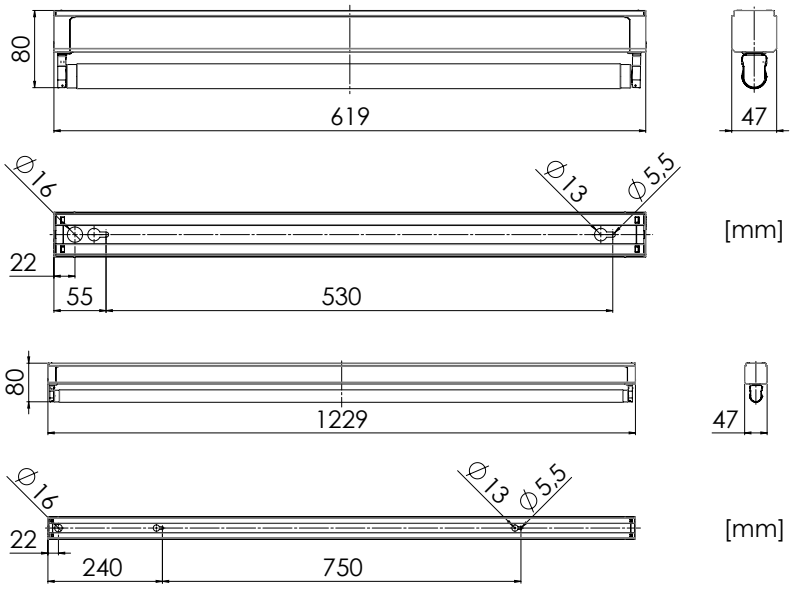

Extras

- 120 V AC execution
- Dimmable electronic ballast
- Through wiring

Spare parts	Part no.
Lamp holder G13	7111023700

Technical modification reserved without prior notice

Part no. 1x 14 W 5118000100
1x 21 W 5118000500
1x 28 W 5118000300
1x 35 W 5118000700

Light source	T5 fluorescent tubes (not included)
Lamp base	G5
Voltage	220-240 V AC
Frequency	50-60 Hz

Batten luminaire for cabins, shops and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Mounting	2 mounting holes, Ø 5.5 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20

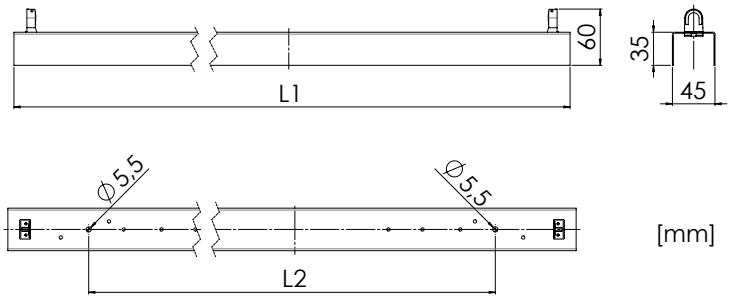

Type	L1	L2	Weight
14 W	595	424	0.9 kg
21 W	895	724	1.2 kg
28 W	1195	1024	1.5 kg
35 W	1495	1324	1.8 kg

Extras

- 120 V AC execution
- Dimmable electronic ballast
- Through wiring

Spare parts	Part no.
Lamp holder G5	7111023300

Technical modification reserved without prior notice

Part no. 1x 11 W 5115000300-xxx
1x 15 W 5115000500-xxx
1x 18 W 5115000600-xxx

Light source	Compact or T8 fluorescent lamp (not included)
Voltage	220-240 V AC
Frequency	50-60 Hz

Mirror Luminaire for cabins, bathrooms, lavatories, accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
End caps	White polycarbonate
Diffuser	Opal PMMA
Switch	On / off switch, 2-pole
Mounting	2 mounting holes, Ø 6 mm
Cable entry	2 cable entries, Ø 20 mm
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP44

Type		Wattage	Lamp base	Part no.
A	2 plastic end caps	11 W	2G7	5115000300-039
		15 W	G13	5115000500-023
		18 W	G13	5115000600-035
B	2 plastic end caps with	11 W	2G7	5115000300-017
	on / off switch, 2-pole	15 W	G13	5115000500-024
		18 W	G13	5115000600-033
C	Isolating transformer, razor socket	11 W	2G7	5115000300-023
	with 110 V / 230 V selector switch	15 W	G13	5115000500-021
		18 W	G13	5115000600-022
D	Isolating transformer,	11 W	2G7	5115000300-028
	on / off switch 2-pole, razor socket	15 W	G13	5115000500-017
	with 110 V / 230 V selector switch	18 W	G13	5115000600-036

Extras

- 120 V AC execution
- LED execution
- Electromagnetic ballast

Technical modification reserved without prior notice

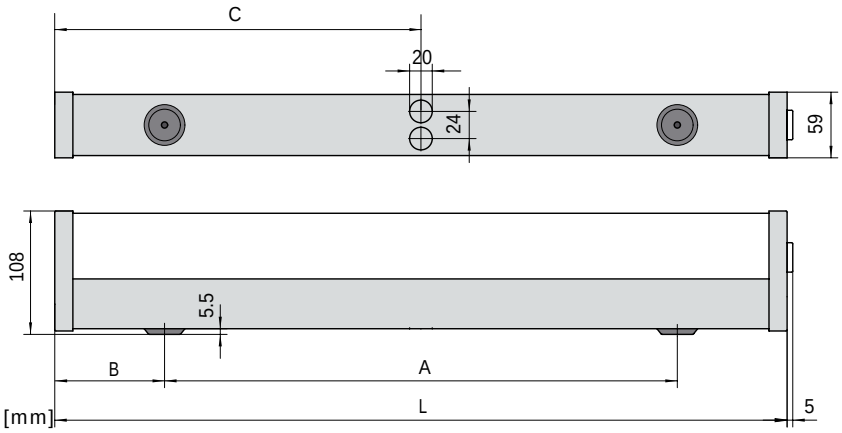

Type		L	A	B	C
A+B	11 W	350	176	87	175
	15 W	498	301	97	247
	18 W	651	453	97	323

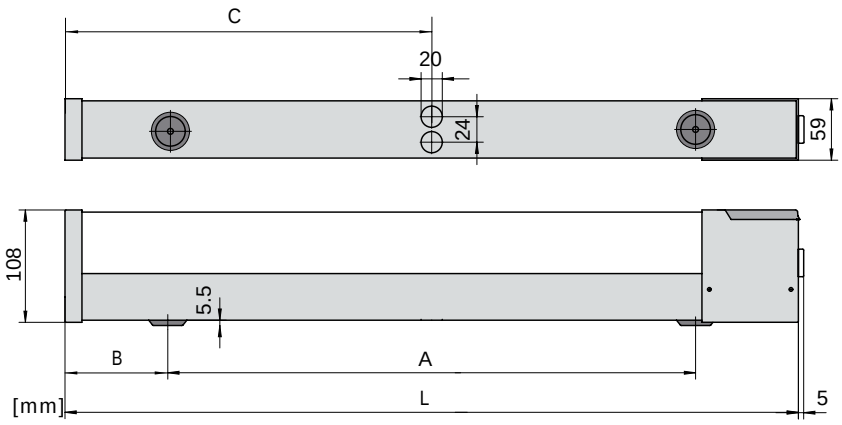

Type		L	A	B	C
C+D	11 W	415	268	37	136
	15 W	605	406	97	300
	18 W	695	498	97	346

Spare parts	Part no.
Cover type A+B	
11W	7935000400
15W	7935000700
18W	7112002800
Cover type C+D	
11W	7112008700
15W	7112012000
18W	7112009000
Lamp holder G13	7111019200
Lamp holder 2G7	7111022100

Emergency Lighting

Product		Page
	HL09	88
	HL13	89
	HL15/HL16	90
	HL20/HL21	91
	HL25	92
	HL26	93
	HL71	94
	TL09 Sign	95

Part no. (w/o sign) 5121000400-014

Light source	T5 fluorescent tube (not included)
Lamp Base	G5
Wattage	1x 6 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Illuminated sign for escape routes

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel
Frame	Stainless steel, polished
Mounting	4 mounting holes, Ø 4.5 mm
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Sign	PMMA. Pictogram on customer requirements
Protection class	IP20
Weight	1.1 kg (with sign)

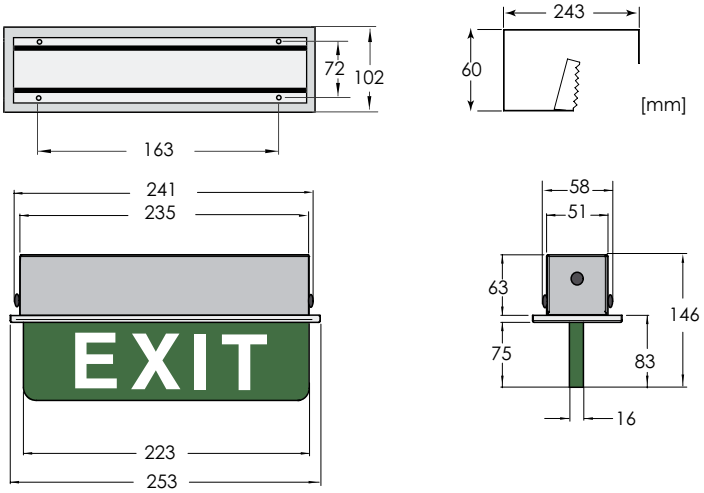

Extras

- 120 V AC execution
- Emergency battery back-up
- Different connectors on request
- Other finish on request

Technical modification reserved without prior notice

Part no. 5122000301-xxx

Light source	Compact fluorescent lamp (not included)
Lamp Base	2G7
Wattage	1x 11 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Illuminated sign, surface mounting, for escape routes in outdoor areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated white (RAL9016)
Mounting	8 mounting holes, Ø 5 mm
Cable entry	Max. 4 cable glands, nickel plated brass
Sign	PMMA. Pictogram on customer requirements
Protection class	IP67
Weight	4.2 kg

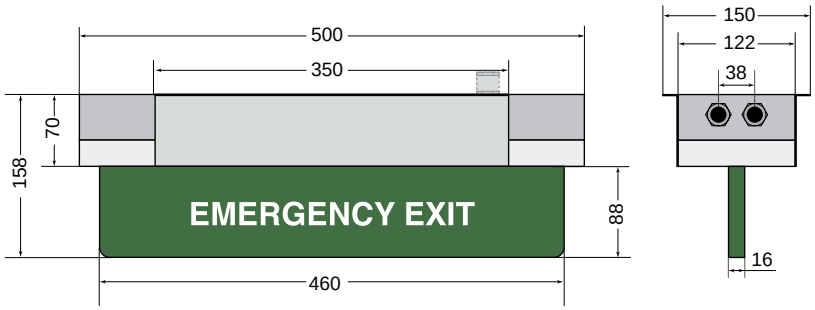

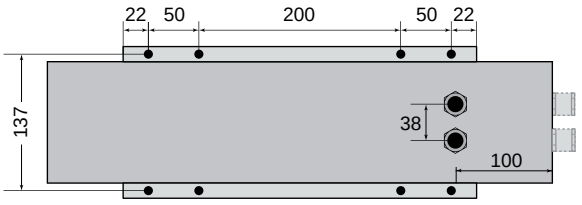

[mm]

Extras

- 120 V AC execution
- Electromagnetic ballast
- Emergency battery back-up (LED)

Technical modification reserved without prior notice

HL15

Part no. HL15 5122000800-xxx
HL16 5122000900-xxx

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	1x 11 W (HL15) 2x 11 W (HL16)
Voltage	220-240 V AC
Frequency	50-60 Hz

Illuminated sign for escape routes with changeable pictogram panes

Design	According to rules of maritime classification societies and relevant standards
Housing	Aluminium, powder coated white (RAL9016)
Mounting	4 pre-installed screws
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Sign	PMMA. Pictogram on customer requirements
Protection class	IP40
Weight	1.8 kg (HL15)/2.2 kg (HL16)

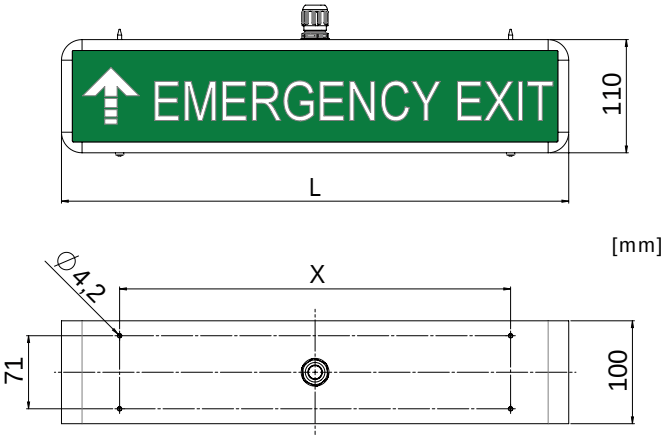

Type	L mm	X mm
HL15	493	380
HL16	703	380

Extras

- 120 V AC execution
- LED execution
- Emergency battery back-up
- Different connectors on request
- Other finish on request

Technical modification reserved without prior notice

HL21

Part no. HL20 5121000300-xxx
HL21 5121000500-xxx

Illuminated sign for escape routes

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel
Frame	Stainless steel, polished
Mounting	Mounting holes, Ø 4.5 mm
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Sign	PMMA. Pictogram on customer requirements
Protection class	IP20
Weight	2.1 kg (HL20)/2.9 kg (HL21)

Light source	T5 fluorescent tube (not included)
Lamp base	G5
Wattage	1x 8 W (HL20) 2x 8 W (HL21)
Voltage	220-240 V AC
Frequency	50-60 Hz

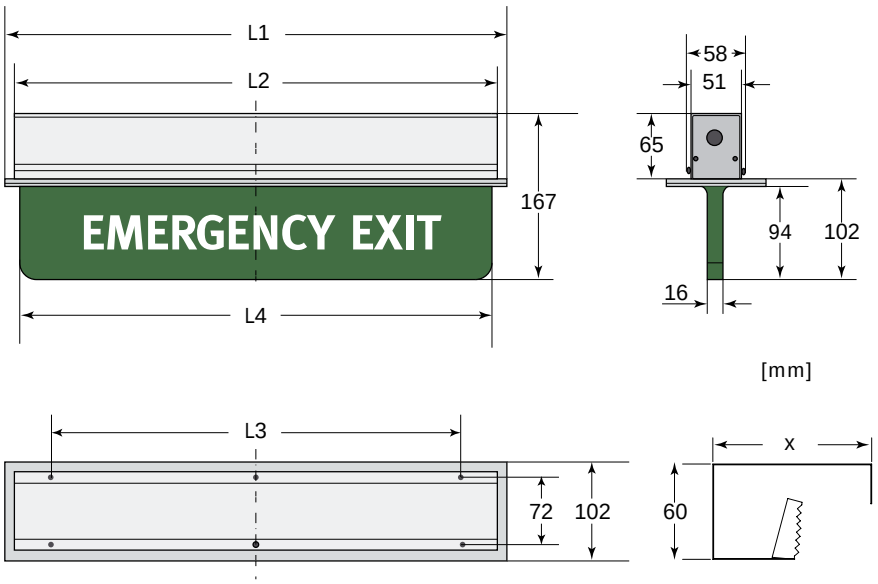

Type	L1	L2	L3	L4	X
HL20	490	478	400	460	480
HL21	670	658	580	640	660

Extras

- 120 V AC execution
- Emergency battery back-up
- Different connectors on request
- Other finish on request

Technical modification reserved without prior notice

Part no. (w/o sign) 5522000900-002

Light source	Linear LP LED module
Wattage	2.2 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Illuminated sign for escape routes with snap-in pictogram pane

Design	According to rules of maritime classification societies and relevant standards
Housing	Polycarbonate
Frame	Stainless steel, polished
Mounting	4 pre-installed screws
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Sign	PMMA. Pictogram on customer requirements
Protection class	IP20
Weight	1.2 kg (with sign)

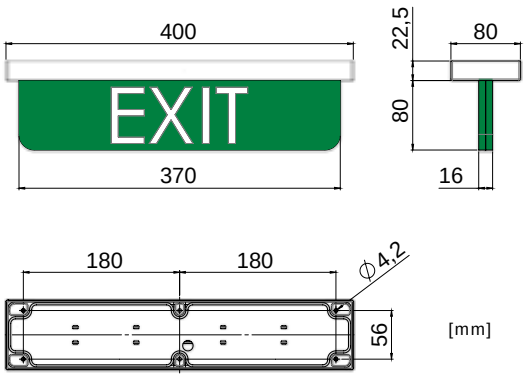

Extras

- 120 V AC execution
- 24 V DC execution
- Emergency battery back-up
- Different connectors on request
- Other finish on request

Technical modification reserved without prior notice

Part no. (w/o sign) 5522001000-004

Light source	Linear LP LED module
Wattage	2.2 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Illuminated sign for escape routes with snap-in pictogram pane for outdoor areas, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel/polycarbonate
Mounting	4 mounting holes, Ø 5 mm
Cable entry	Cable gland, nickel plated brass
Connection type	Connection cable with Wieland 3-pole plug, IP66
Sign	PMMA. Pictogram on customer requirements
Protection class	IP67
Weight	2.0 kg (with sign)

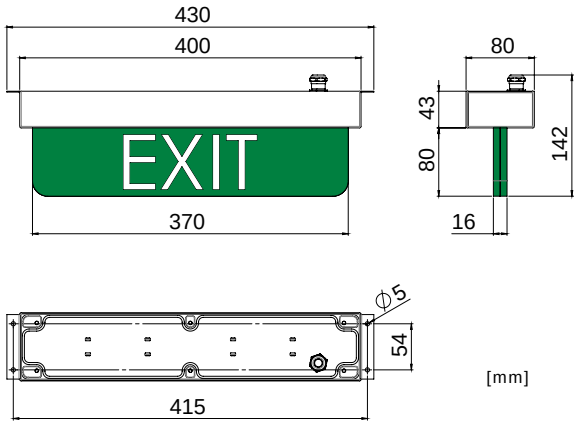

Extras

- 120 V AC execution
- 24 V DC execution
- Emergency battery back-up
- Different connectors on request
- Other finish on request

Technical modification reserved without prior notice

Part.No. (w/o sign) 5521000200-xxx

Light source	Linear LP LED module
Wattage	0.9 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Illuminated sign for escape routes

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel
Frame	Stainless steel, polished
Mounting	4 mounting holes, Ø 4.2 mm
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Sign	PMMA. Pictogram on customer requirements
Protection class	IP20
Weight	1.2 kg (with sign)

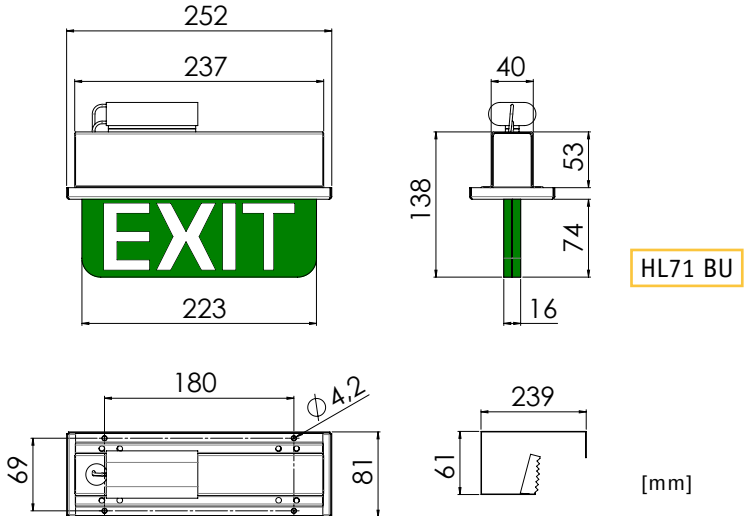

Extras

- Other finish on request
- Emergency battery back-up
- Different connectors on request

Technical modification reserved without prior notice

Part.No. 5122004400-xxx

Light source	Cluster LP LED module
Wattage	1x 5.5 W
Equivalent	1x 9 W CFL
CCT (color)	4,500 K
Voltage	220-240 V AC
	110-120 V AC
Frequency	50-60 Hz

Multipurpose watertight luminaire for decks, stores, engine rooms, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Mounting	Mounting holes, Ø 9 mm
Cover	Opal polycarbonate, impact-proof
Cable entry	2 cable glands M20, nickel plated brass
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP67 (IP64 with switch)
Weight	1.5 kg

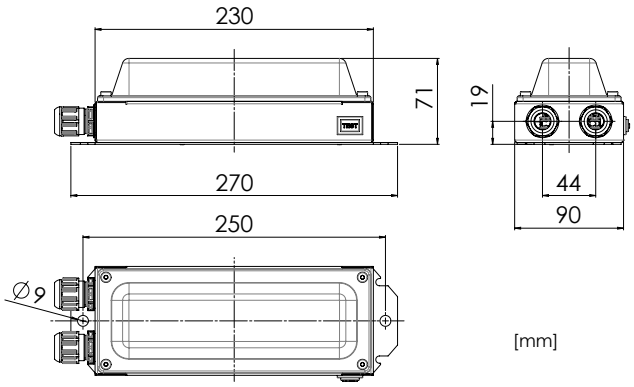

[mm]

Extras

- Stainless steel housing
- Satin cover
- Emergency battery back-up with test switch, 1 W
- Different cable glands on request

Technical modification reserved without prior notice

Downlights

Product	Page
DL STAR	98
DL70	99
DL88	100
DL73	101
DL90S	102
DL90A	103
DL90AM	104
DL90E	105
DL90S44	106
DL33	107
DL660	108
DL660M	109
DL110Q	110
DL180Q	111
DL167	112
DL50	114
DL99	115
DL53	116
DL67	117
DL52 DL63	118
DL27	120

Type A

Type B

Part no. Type A 5301004600-xxx
Type B 5301004700-xxx

Light source	QT9 halogen lamp (not included)
Lamp base	G4
Wattage	Max. 20 W
Voltage	12 V

Halogen star light for effect lighting

Design	According to rules of maritime classification societies and relevant standards
Housing	Gold, chrome or white (RAL9016)
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Connection cable with Ensto 2-pole plug
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.04 kg

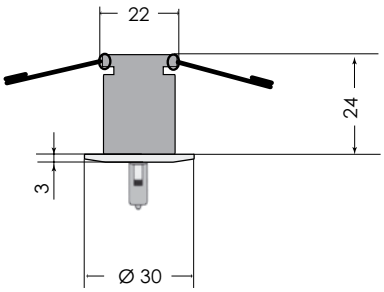

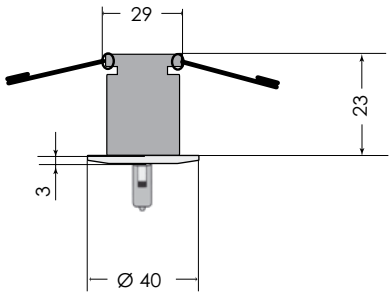



[mm]

Type A



[mm]

Type B

Extras

- Different connectors on request
- Other finish on request
- Connection type unit according to specific application

Technical modification reserved without prior notice

Part no. 5301011000-xxx

Light source	QT9 halogen lamp (included)
Lamp Base	G4
Wattage	Max. 20 W
Voltage	12 V

Flat furniture downlight with reflector

Design	According to rules of maritime classification societies and relevant standards
Housing	Polycarbonate
Cover ring	Gold, chrome, diamond-silver or white
Lamp cover	Clear or satined glass
Mounting	2 fixing springs or 3 screws
Connection type	2000 mm connection cable with Ensto 2-pole plug
Wiring	Flexible wiring, heat resistant up to 180°C
Protection class	IP20
Weight	0.05 kg

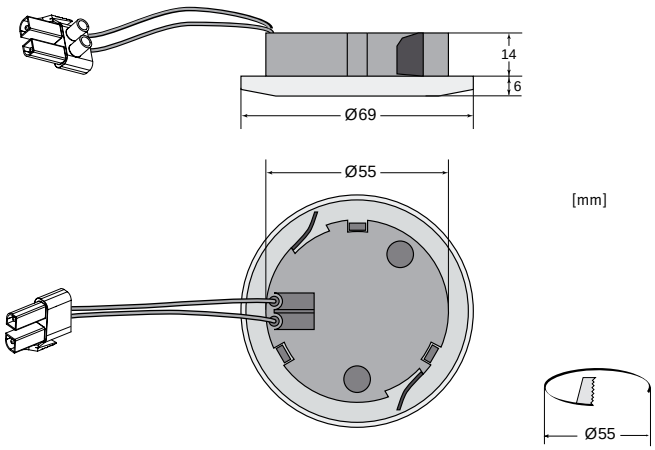

Extras

Different transformers on request

Part no. Type A 5302003700-xxx
Type B 5302002100-xxx

Light source	MR11 halogen lamp (not included)
Lamp base	GU4
Wattage	Max. 35 W
Voltage	12 V

Adjustable downlight for cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	Type A: 0.18 kg Type B: 0.15 kg

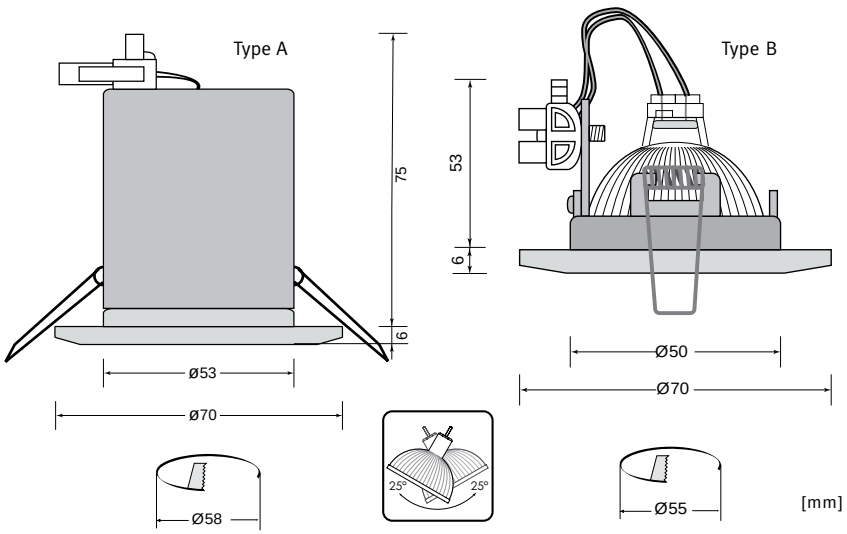

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

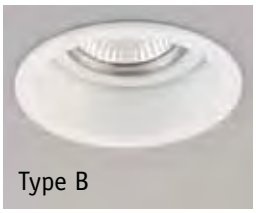

Part no. Type A 5302005300-xxx
Type B 5302005200-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Adjustable downlight for cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing/ ring	Galvanized steel, powder coated gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.4 kg (form T4)

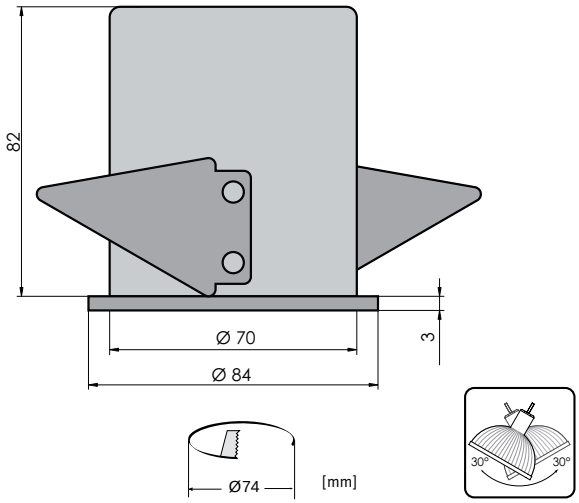

Execution details see page 113

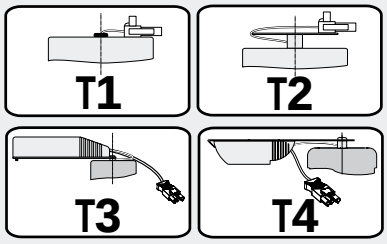

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

Part no. Type A 5301003100-xxx
Type B 5301004500-xxx
Type C 530100xxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Downlight for cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (type A/ type B/ type C, form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (type C , form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	Type A: 0.10 kg Type B: 0.15 kg Type C: 0.40 kg (form T4)

Execution details see page 113

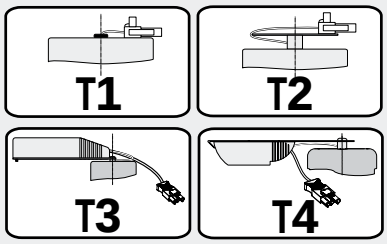

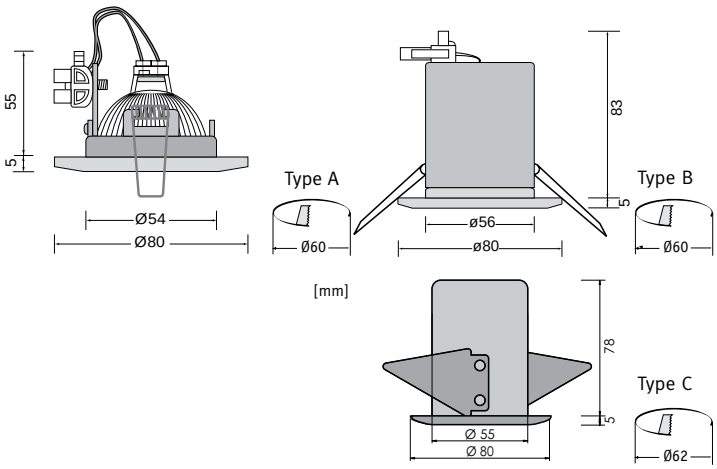

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

Part no. Type A 5302002000-xxx
Type B 5302001700-xxx
Type C 530200xxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Adjustable downlight for cabins, accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (type A/ type B/ type C, form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (type C ,form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	Type A: 0.15 kg Type B: 0.20 kg Type C: 0.45 kg (form T4)

Execution details see page 113

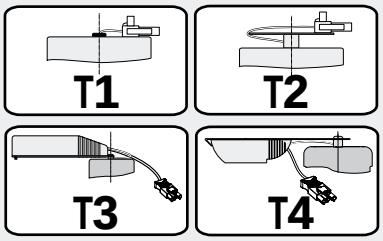

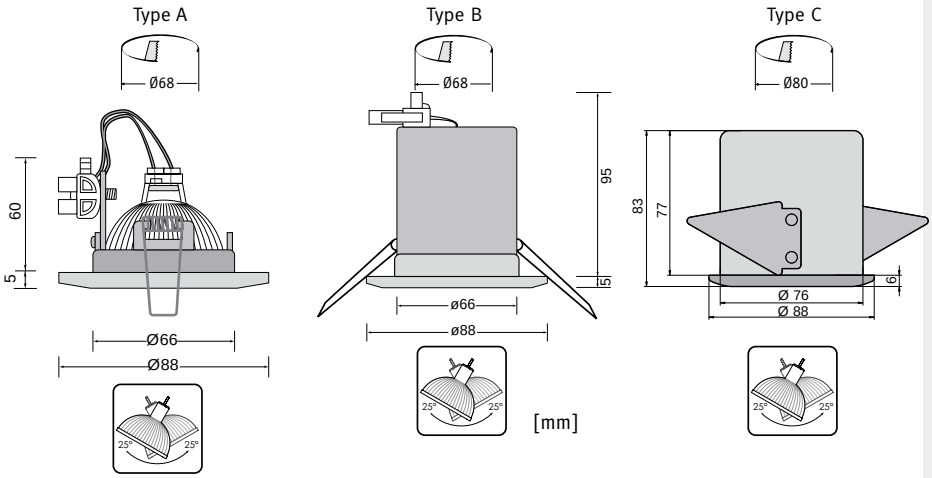

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

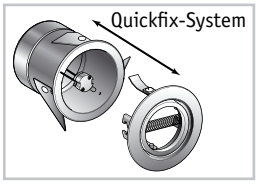

Part.No. 5302xxxxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Adjustable downlight, cover ring with quickfix-system

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.5 kg (form T4)

Execution details see page 113

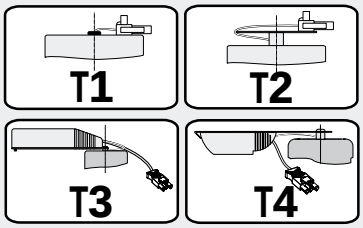

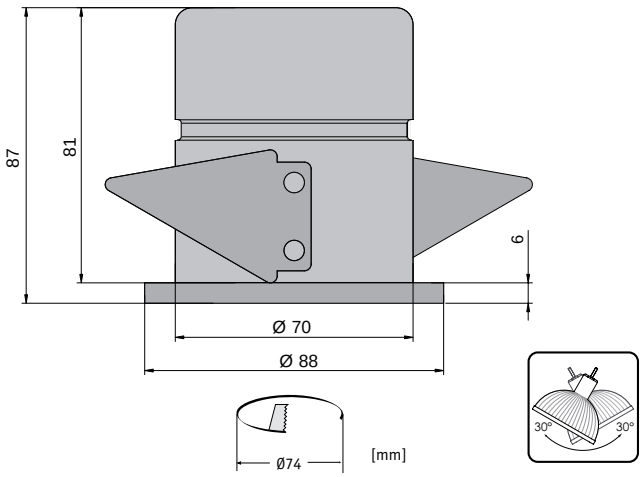

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

Part.No. 5302xxxxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Adjustable wallwasher for accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.8 kg (form T4)

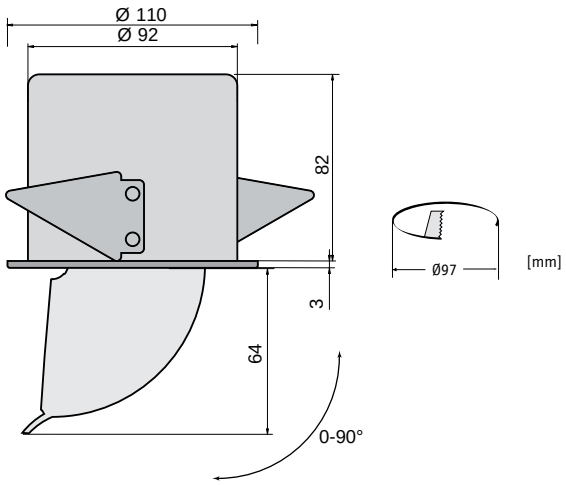

Execution details see page 113

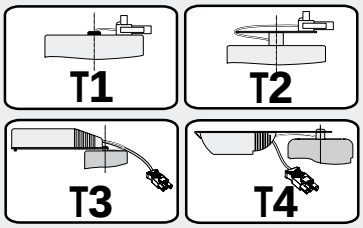

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

Part.No. 5301008700-xxx

Light source	MR16 cool beam halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 20 W
Voltage	12 V

Downlight for bathrooms and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel
Cover ring	Gold, chrome or colors in accordance with RAL or NCS
Lamp cover	Clear or satined glass
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	150 mm connection cable with Ensto 2-pole plug
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP44
Weight	0.3 kg

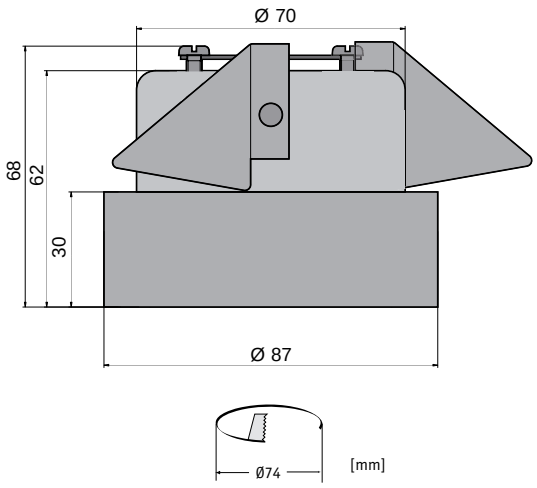

Extras

Different transformers on request

Technical modification reserved without prior notice

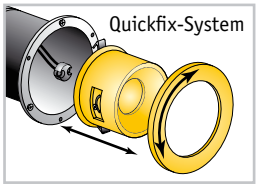

Part no. Type A (fixed)	5301002100-xxx
Type B (adjust.)	5302000100-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Fixed or adjustable downlight, cover ring with quickfix-system

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.6 kg (form T4)

Execution details see page 113

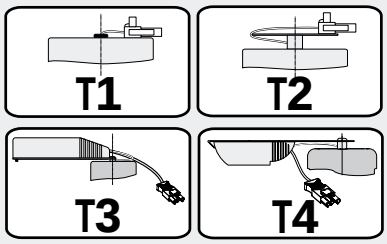

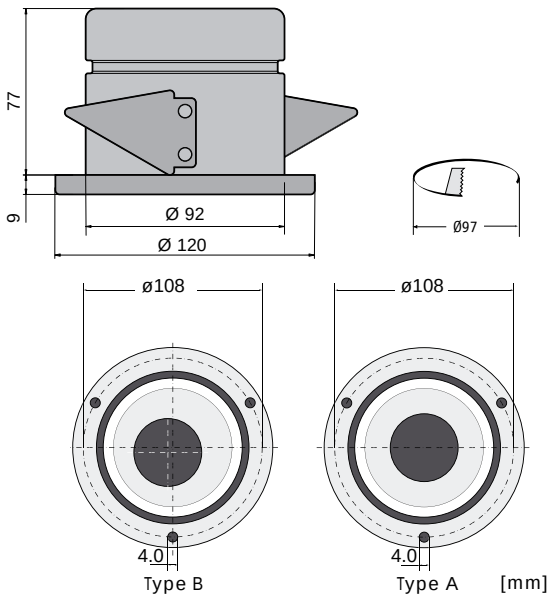

Extras

Different connectors on request

Technical modification reserved without prior notice





Part.No. 530100xxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Downlight, cover ring with quickfix-system

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20 (IP44 with cover glass)
Weight	0.7 kg (form T4)

Execution details see page 113

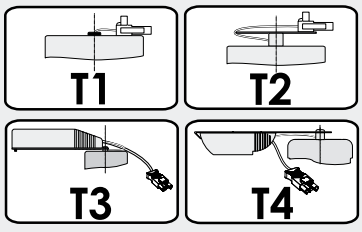

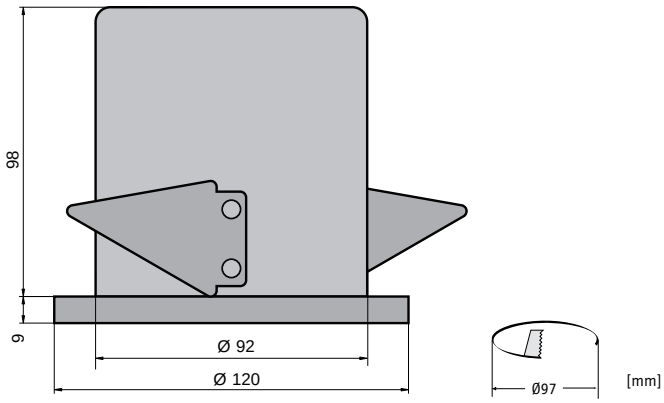

Extras

- Different connectors on request
- Different transformers on request
- Different decorative cover rings on request

Technical modification reserved without prior notice



Part no. Fixed	530100xxxx-xxx
Adjustable	530200xxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Fixed or adjustable downlight, cover ring with magnetic-system

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20 (IP44 with cover glass)
Weight	0.7 kg (form T4)

Execution details see page 113

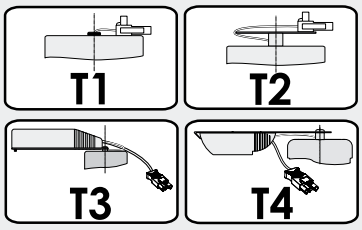

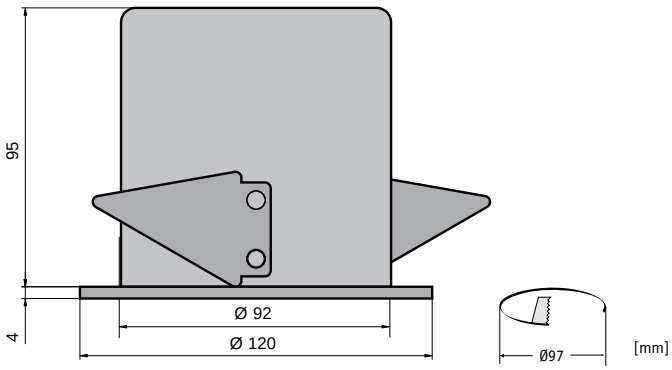

Extras

- Different connectors on request
- Different transformers on request
- Different decorative cover rings on request

Technical modification reserved without prior notice

Type A

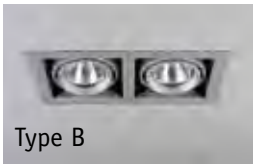
Type B

Part no. Type A 5302007300-xxx
Type B 5302009000-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 50 W
Voltage	12 V

Gimbal downlight for accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative frame	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Cut out	95 x 95 mm (type A)/95 x 187 mm (type B)
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	Type A: 0.6 kg / Type B: 0.8 kg

Type A

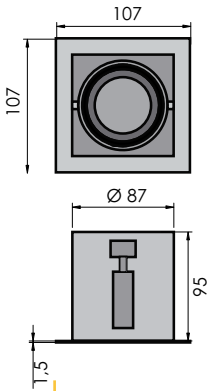

Type B

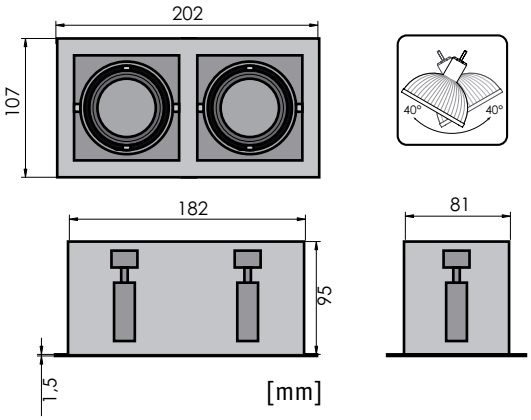

Execution details see page 113

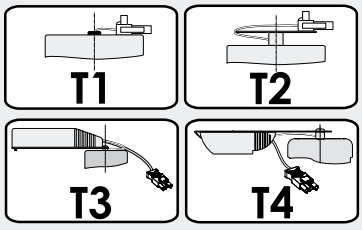

Extras

- Different connectors on request
- Different transformers on request
- GU10 lamp holder for PAR16 application
- Triple type on request

Technical modification reserved without prior notice

Type A


Type B

Part no. Type A	5302008400-xxx
Type B	5302008300-xxx

Light source	QR111 halogen lamp (not included)
Lamp base	G53
Wattage	Max. 75 W
Voltage	12 V

Gimbal downlight for accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative frame	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Cut out	155 x 155 mm (type A)/155 x 315 mm (type B)
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	Type A: 1.3 kg / Type B: 2.2 kg

Type A

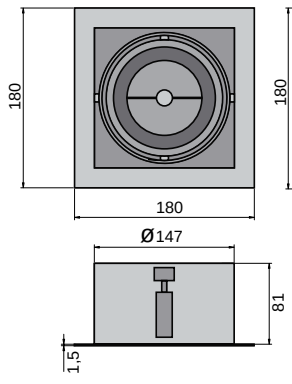

Type B

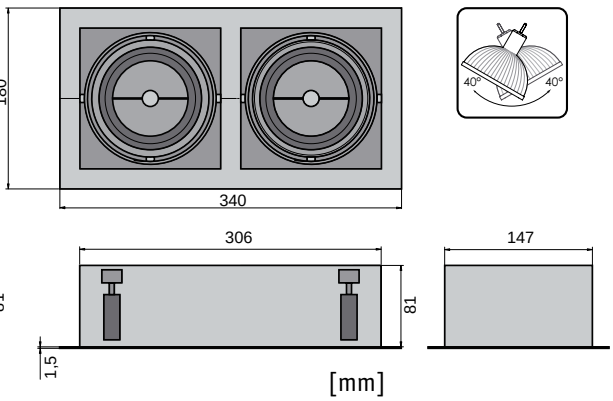

Execution details see page 113

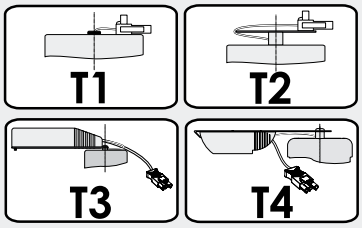

Extras

- Different connectors on request
- Different transformers on request
- Triple type on request

Technical modification reserved without prior notice

Part.No. 5302009100-xxx

Light source	QR111 halogen lamp (not included)
Lamp base	G53
Wattage	Max. 100 W
Voltage	12 V

Gimbal downlight for accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel,powder coated
Decorative ring	Colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm
Connection type	Ensto 2-pole plug (form T1/ T2) 400 mm cable with WAGO-Winsta 3-pole plug (form T3/ T4 with transformer)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.8 kg (form T4)

Execution details see page 113

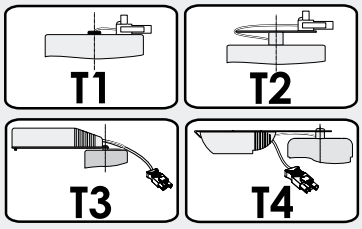

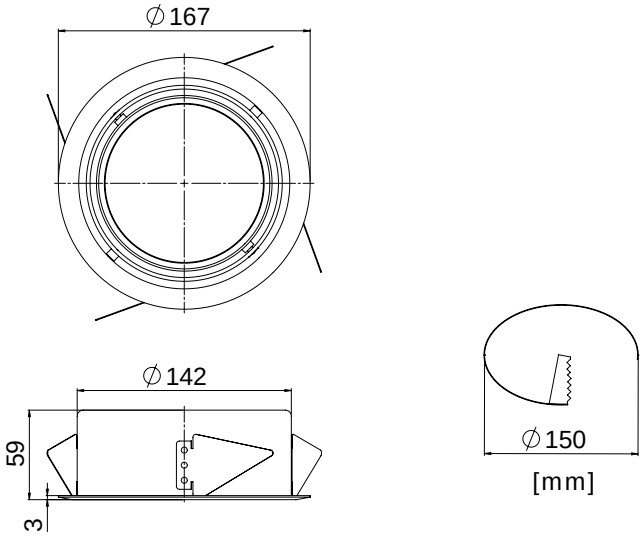

Extras

Different connectors on request

Technical modification reserved without prior notice





T1 12 V
2-pole plug
Ensto AL19 or
Ensto NAC21





T2 12 V
2-pole plug
Heat deflector plate

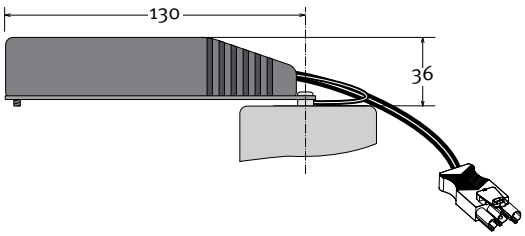



T3 230 V
Connection cable with
WAGO-Winsta Midi or
Wieland GST 18/3 plug

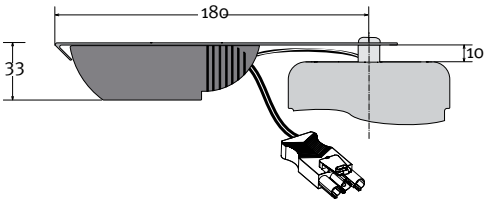



T4 230 V
Connection cable with
WAGO-Winsta Midi or
Wieland GST 18/3 plug

[mm]

Extras

Different transformers on request

Technical modification reserved without prior notice

Part no. Brass	5311000200-003
Chrome	5311000200-004

Light source	PAR16 halogen or LED retrofit lamp (not included)
Lamp base	GU10
Wattage	Max. 35 W
Voltage	230 V AC

Surface mounted spotlight for accommodation and public areas, IP55

Design	According to rules of maritime classification societies and relevant standards
Housing	Brass, polished or chromium plated
Mounting	2 mounting holes Ø 3.5 mm
Connection type	500 mm cable with WAGO-Winsta 3-pole plug
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.35 kg

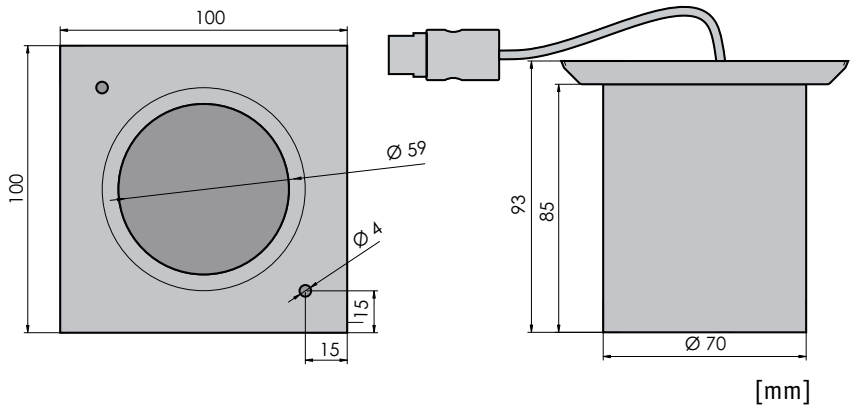

[mm]

Extras

Different connectors on request

Other finish on request

Technical modification reserved without prior notice

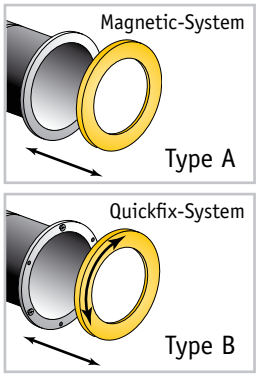

Part no. Type A	5301002500-xxx
Type B	5301008800-xxx

Light source	PAR20 halogen lamp (not included)
Lamp base	E27
Wattage	Max. 50 W
Voltage	230 V AC

Halogen downlight, cover ring with quickfix- or magnetic-system

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated black
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS
Mounting	Fixing springs for ceilings max. 20 mm or mounting holes Ø 4.0mm
Connection type	400 mm cable with WAGO-Winsta 3-pole plug
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP20
Weight	0.55 kg

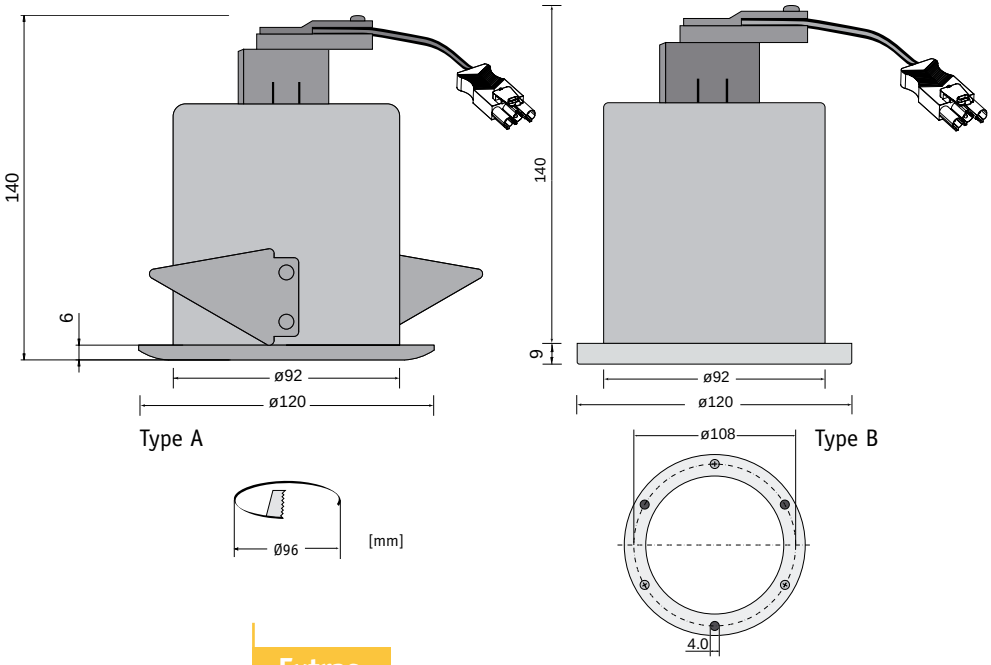

Extras

Different connectors on request

Different decorative cover rings on request

Technical modification reserved without prior notice

Part.No. 5401006600-xxx

Light source	Compact fluorescent lamp (not included)
Lamp base	G24q-1
Wattage	1x 13 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Watertight downlight with reflector for outdoor areas, IP55

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated black
Reflector	Aluminium in chrome, gold or white
Cover ring	Stainless steel, brushed, polished or colors in accordance with RAL or NCS
Lamp cover	Clear or satined glass
Mounting	3 mounting holes Ø 4.5 mm
Connection type	Connection cable with Wieland 3-pole plug, IP66
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP55
Weight	1.1 kg

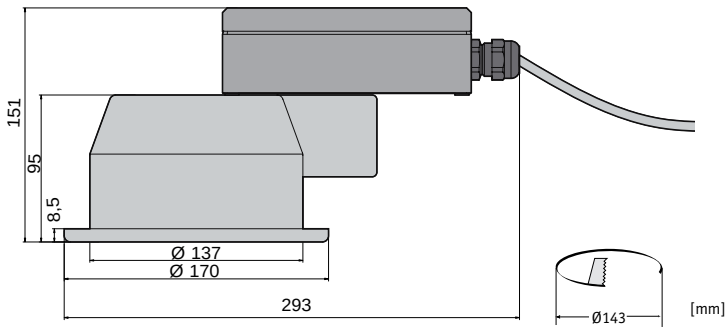

Extras

Dimmable electronic ballast

120 V AC execution

Part.No. 530100xxxx-xxx

Light source	MR16 halogen lamp (not included)
Lamp base	GU5.3
Wattage	Max. 35 W
Voltage	12 V

Watertight uplight / downlight, adjustable, for outdoor areas, IP67

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel, powder coated black
Cover ring	Stainless steel, brushed, polished or colors in accordance with RAL or NCS
Lamp cover	Clear or satined glass
Mounting	3 mounting holes Ø 4 mm
Cable entry	1x cable gland PG9, brass nickel plated
Connection type	Connection cable (lengths and connector on customer requirements)
Wiring	Flexible wiring, heat resistant up to 250°C
Protection class	IP67
Weight	0.6 kg

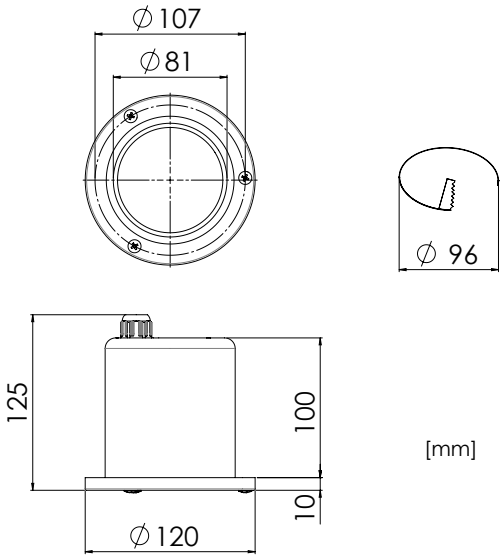

Extras

Different connectors on request

Different transformers on request

Technical modification reserved without prior notice

Part no. (w/o ring) 5501xxxxxx-xxx

Light source	Compact fluorescent lamp (not included)
Wattage	1x 13 W 1x 18 W 1x 26 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Downlight for accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel
Reflector	White Optional aluminium reflector in chrome or gold.
Cover ring	Gold, chrome or colors in accordance with RAL or NCS. Optional with cover (see page 121)
Mounting	Max. 6 mounting holes, Ø 4.5 mm. Cut out: Ø 143 mm
Connection type	Connection cable with WAGO-Winsta plug
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20 (IP44 with cover glass)

Type	Wattage	Lamp base	Part no. (w/o ring)	Weight
DL52 M	13 W	G24q-1	5501007900-xxx	0.85 kg
DL63 M	13 W	G24q-1	5501007800-xxx	0.80 kg
DL52 M	18 W	G24q-2	5501006300-xxx	0.85 kg
DL63 M	18 W	G24q-2	5501007000-xxx	0.80 kg
DL52 L	13 W DIM	G24q-1	5501007100-xxx	1.20 kg
DL63 L	13 W DIM	G24q-1	5501007200-xxx	1.15 kg
DL52 L	18 W DIM	G24q-2	5501006500-xxx	1.20 kg
DL63 L	18 W DIM	G24q-2	5501007300-xxx	1.15 kg
DL52 I	26 W	GX24q-3	5501006700-xxx	1.40 kg

Extras

- 120 V AC execution
- 230 V LED emergency operation
- B0 execution
- Emergency battery back-up
- Different connectors on request
- Built-in connectors (type Ensto)

Spare parts	Part no.
Lamp holder G24q-1	7111023900
Lamp holder G24q-2	7111016200
Lamp holder GX24q-3	7111003800

Technical modification reserved without prior notice

Form M

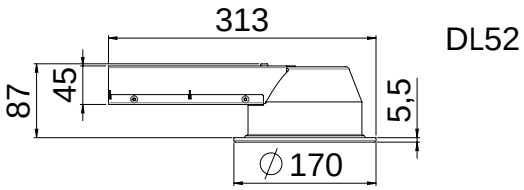

DL52

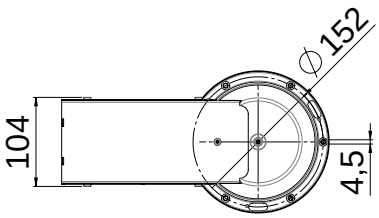

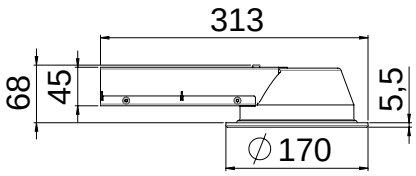

DL63

[mm]

Form L

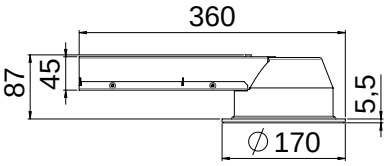

DL52

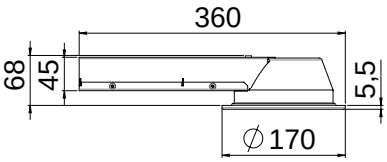

DL63

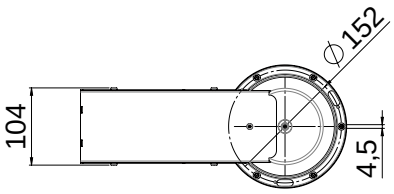

[mm]

Form I

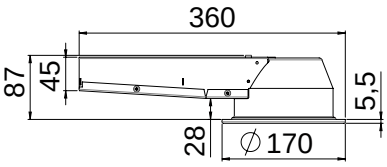

[mm]

DL52 1x26W

Part no. 5301000300-xxx

Light source	Incandescent lamp (not included)
Lamp base	E27
Wattage	Max. 60 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Incandescent Downlight for accommodation and public areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white
Reflector	Aluminium in chrome, gold or white
Cover ring	Gold, chrome or colors in accordance with RAL or NCS
	Optional clear or satined glass (see page 121)
Mounting	Max. 6 mounting holes Ø 4.5 mm
Connection type	Connection cable with WAGO-Winsta 3-pole plug
Wiring	Flexible wiring, heat resistant up to 105°C
Protection class	IP20 (IP44 with cover glass)
Weight	0.8 kg

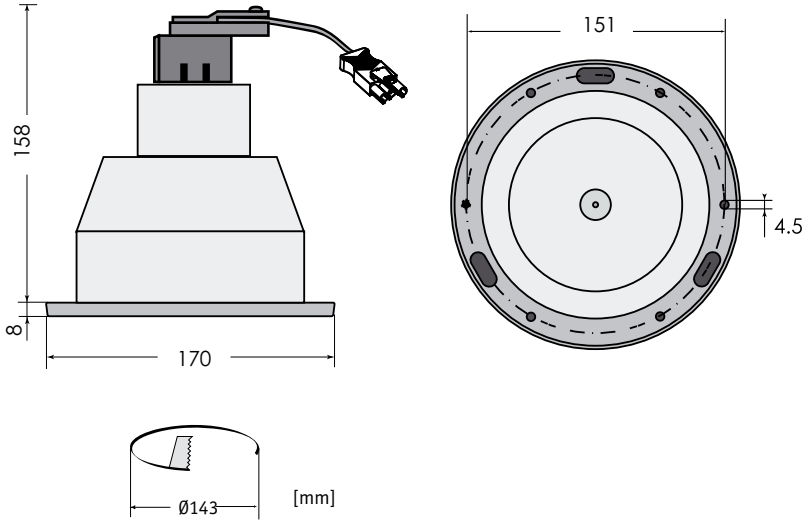

Extras

Different connectors on request

Red cover glass

Technical modification reserved without prior notice

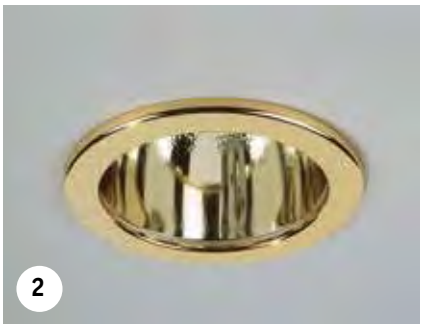

1 Form A1
Powder coated

2 Form A1
Gold plated

3 Form A2
Satined glass

4 Form A2
Outside satined,
center clear Ø 60 mm

5 Form A2
Inside satined Ø 111mm,
outside clear

6 Form A3
Suspended pane
Inside satin Ø 130 mm

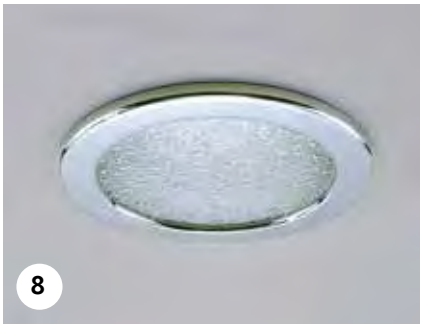

7 Form A2
Decor element

8 Form A2
PMMA pane with
ice crystal structure

Office and Workplac

e Luminaires

Product		Page
	TI20	124
	TI20	125
	TI20	126
	TI14	127

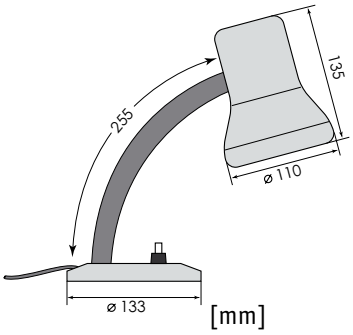

Part no. 5135000200-001

Light source	Incandescent lamp (not included)
Lamp base	E27
Wattage	Max. 60 W
Voltage	120 V / 230 V AC
Frequency	50-60 Hz
Housing	Metal, white (RAL9010)
	Flexible arm
Switch	Lamp base
Connection type	1500 mm power cord with Euro plug
Protection class	IP20
Weight	1.2 kg

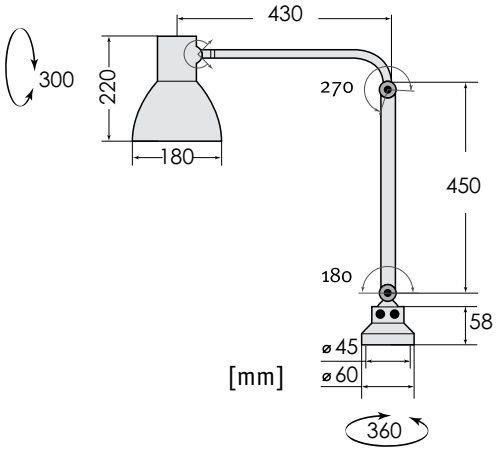

Part no. 5135000300

Light source	Incandescent lamp (not included)
Lamp base	E27
Wattage	Max. 100 W
Voltage	120 V / 230 V AC
Frequency	50-60 Hz
Housing	Metal, silver (RAL9006)
	Friction-arm
Switch	Lighting head
Mounting	Base Mounting
Connection type	1500 mm power cord with Schuko plug
Protection class	IP20
Weight	1.5 kg
Option	IP54

Technical modification reserved without prior notice

Part no. 5135000100

Light source	T29-R circline fluorescent lamp 4,000 K (included)
Lamp base	G10q
Wattage	1x 22 W
Voltage	230-240 V
Frequency	50-60 Hz

Circline magnifier with symmetric light distribution
Switch in lighting head

Design	According to rules of maritime classification societies and relevant standards
Adjustable arm	Metal, white (RAL9010), spring-balanced
Lighting head	Metal, white (RAL9010), grip for easy adjustment
Lens	Biconvex glass lens, Ø 120 mm
	3-diopters (= 1,75 x power)
Lamp cover	Translucent durable plastic material
Mounting	Screwdown base
Connection type	1500 mm power cord with Euro plug
Protection class	IP20
Weight	2.5 kg

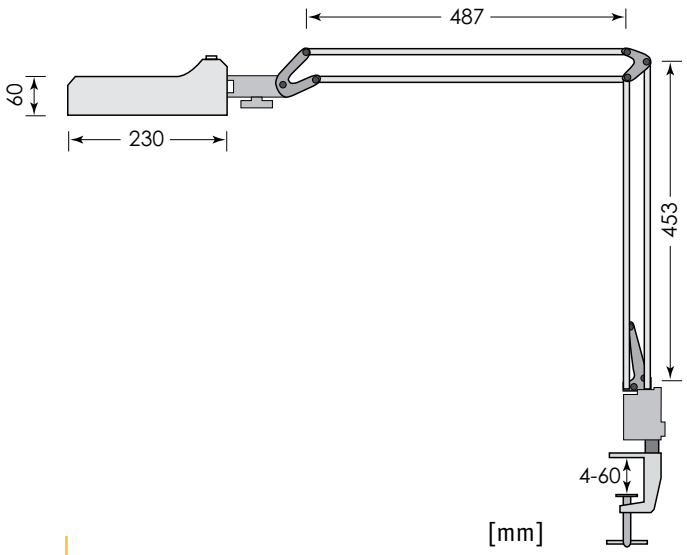

Extras

5-diopters (= 2,25 x power)

Different fixing kits

Technical modification reserved without prior notice

Part no. 50 Hz 5135000500
60 Hz 5135000500-001

Light source	Compact fluorescent lamp (not included)
Lamp base	G24d-2
Wattage	18 W
Voltage	230 V
Frequency	50 or 60 Hz
Switch	In the lower tubular section

Chart table light with friction arm and switch

Design	According to rules of maritime classification societies and relevant standards
Housing	Metal / plastics, silver (RAL9006) / black
Flex arm	Friction-arm
Mounting	Base mounting
Connection type	1500 mm power cord
Protection class	IP20
Weight	3.0 kg

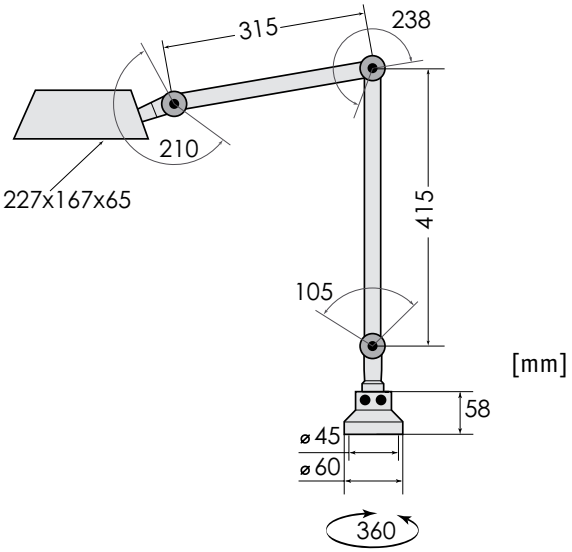

Extras

- IP54
- Different fixing kits
- Electronic ballast

Technical modification reserved without prior notice

Part no.	
w. transformer	5135000600-xxx
w. dimmer	5135000700-xxx

Light source	QT9 halogen lamp (not included)
Lamp base	G4
Wattage	1x 20 W
Voltage	230 V / 12 V

Chart table light with flexible arm and switch in lighting head

Design	According to rules of maritime classification societies and relevant standards
Housing	Thermosetting plastic, black
Flex arm	Available arm lengths 250, 500 or 700 mm
Mounting	Base mounting, 4x Ø 4.5 mm
Protection class	IP20

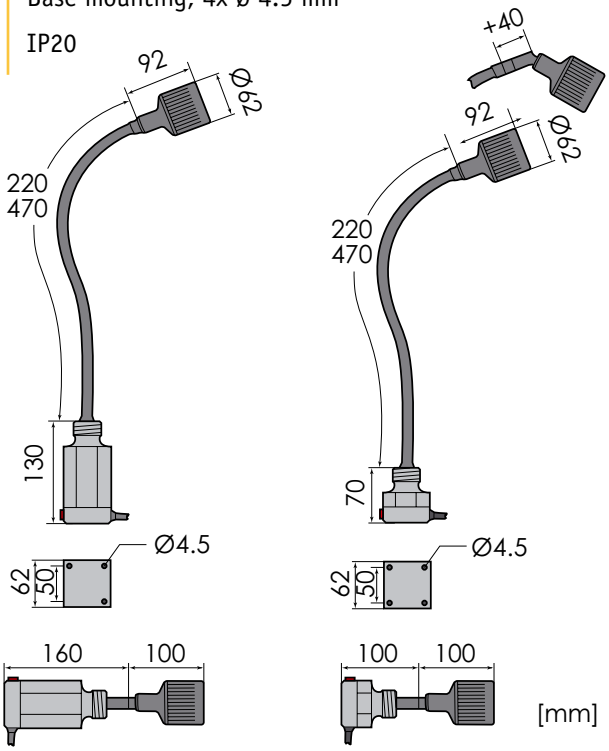

Extras

24 V
Switch in pedestal
Jointed lamp head
IP65

Spare parts	Part no.
Red lens	7112004300
Transformer 120/ 12 V	7103009500
230/ 12 V	7103008500
230/ 24 V	7103003400

Technical modification reserved without prior notice

Decorative Table and

Wall Lights

Product		Page
	WL80	130
	WL100	131
	KJ16	132
	WL282	133
	WL28	134
	WL64	135
	WL39	136
	WL77	137
	WL Melissa	138
	WL55	139
	BERLIN	140
	AMBIA	141

Part no. 5305001000-003

Light source	PAR16 halogen lamp (not included)
Lamp Base	GU10
Wattage	Max. 35 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Adjustable spotlight with switch for cabins

Design	According to rules of maritime classification societies and relevant standards
Housing	Chromium plated brass
Mounting	2 mounting holes 5x 10 mm
Cable entry	Ø 24 mm
Swivel range	350°
Protection class	IP20
Weight	0.4 kg

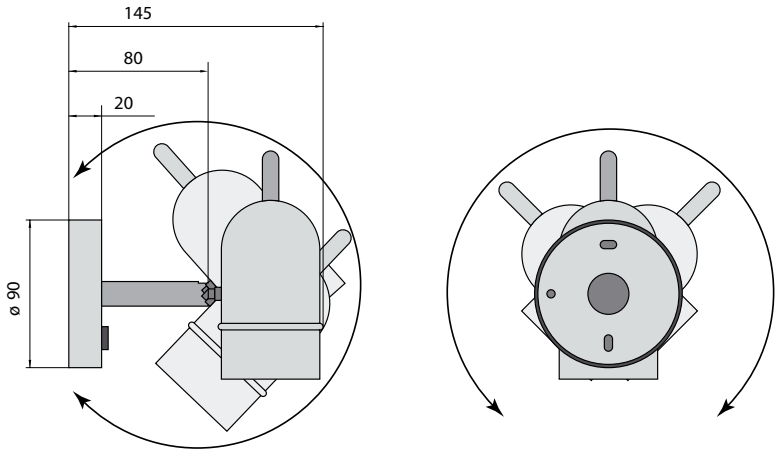



[mm]

Extras

Other finish on request

Technical modification reserved without prior notice

Part no. 5127011200-001

Light source	LED 2700 K
Wattage	1 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Adjustable reading light with switch for cabins and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Stainless steel
Mounting	4 mounting holes, Ø 4.5 mm
Cable entry	Ø 42 mm
Swivel range	350°
Protection class	IP20
Weight	0.6 kg

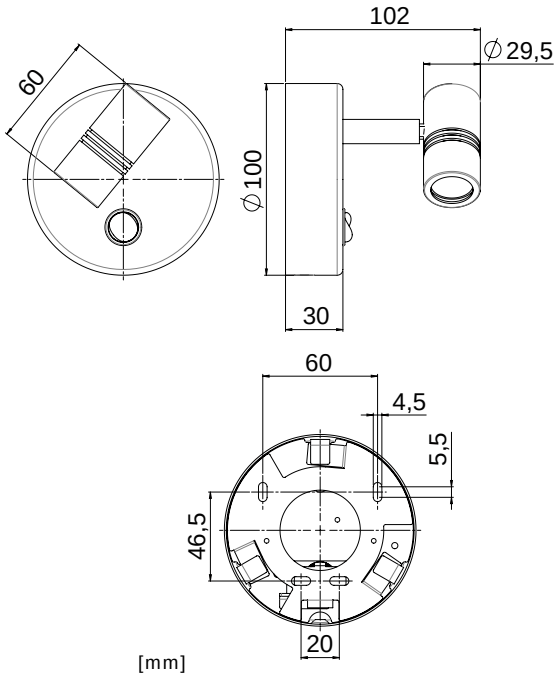

[mm]

Extras

Other finish on request

24 V DC on request

Technical modification reserved without prior notice

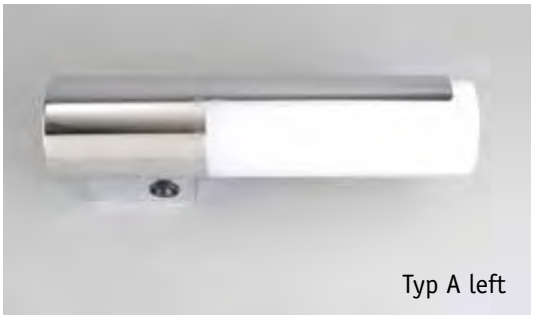
Typ A left


Typ B right

Part no. Type A 5117001100-001
Type B 5117001000-001

Light source	Compact fluorescent lamp (not included)
Lamp base	G24q-2
Wattage	1x 18 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Berth light with switch for cabins and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Chromium plated brass
Diffuser	Opal polycarbonate
Mounting	4 mounting holes, Ø 5 mm
Protection class	IP20
Weight	0.9 kg

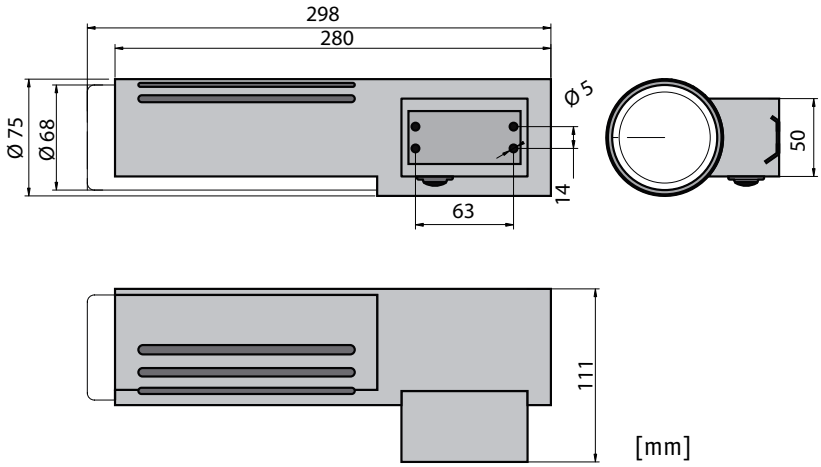

Extras

Other finish on request

Execution without switch

Spare parts	Part no.
Diffuser	7112023600

Technical modification reserved without prior notice

Part no. Switch left 5130007500-005
Switch right 5130007500-006

Light source	Compact fluorescent lamp (not included)
Lamp base	2G7
Wattage	1x 11 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Wall light with switch for cabins and accomodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Aluminium, RAL9006
Diffuser	Opal polycarbonate
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	Ø 24 mm
Protection class	IP20
Weight	1.0 kg

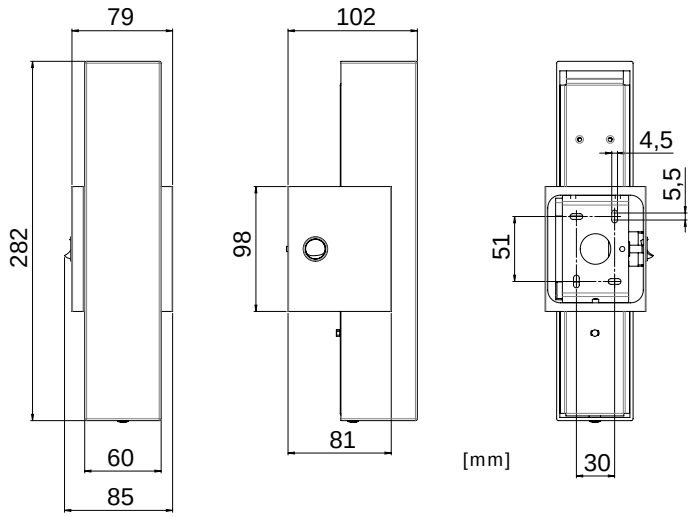

Extras

- Other finish on request
- Execution without switch
- LED execution
- USB charging socket

Spare parts	Part no.
Diffuser	7934000600
Lamp holder 2G7	7111015500

Technical modification reserved without prior notice

Part no. 5130003500-xxx

Light source	T2 fluorescent lamp (not included)
Lamp base	W4.3
Wattage	1x 6 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Decorative wall light with switch for cabins, lounges and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Die-cast aluminium, nickel brushed or chrome finish
Diffuser	Satined PMMA
Mounting	4 mounting holes, Ø 5 mm
Protection class	IP20
Weight	0.7 kg

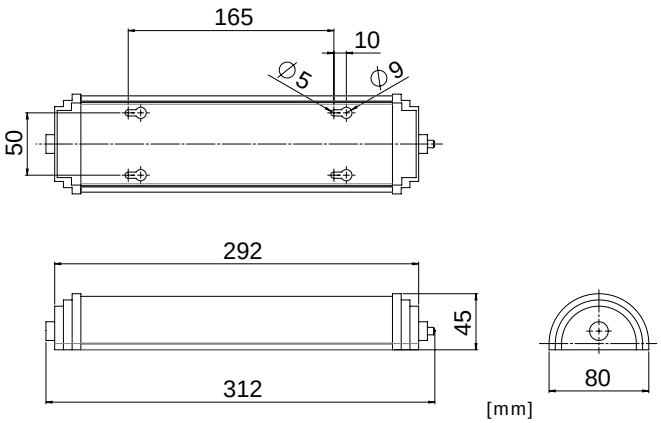

Extras

- LED execution
- Execution without switch
- Other finish on request

Type A

Type B

Part no. 5127003700-xxx

Light source	Incandescent or compact fluorescent lamp (not included)
Lamp base	E14 (max. 25W, type B)
(Wattage)	G23 (max. 9W, type A)
Voltage	230 V AC
Frequency	50 or 60 Hz

Decorative wall light for cabins, lounges and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Chromium plated steel
Lamp cover	Opal
Mounting	4 mounting holes, Ø 4 mm
Protection class	IP20
Weight	1.2 kg

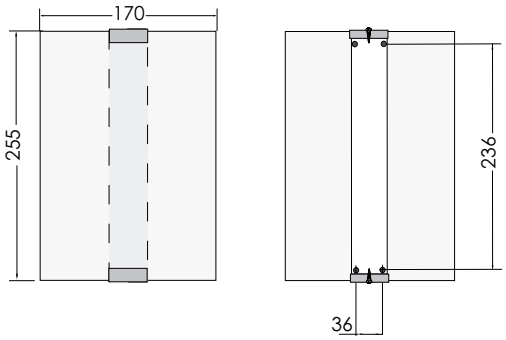

Type A

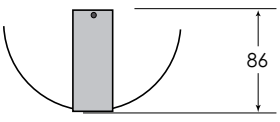

[mm]

Extras

- 120 V AC execution
- Execution with switch
- Other finish on request

Spare parts	Part no.
Diffuser type A	7112017400
Diffuser type B	7112017100

Technical modification reserved without prior notice

Part no. 50 Hz 5127003000-001
60 Hz 5127003000-000

Light source	Compact fluorescent lamp (not included)
Lamp base	G23
Wattage	1x 11 W
Voltage	230 V AC
Frequency	50 or 60 Hz

Decorative wall light for cabins, lounges and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Brass
Diffuser	Opal polycarbonate
Mounting	4 mounting holes, Ø 5 mm
Cable entry	Ø 26 mm
Protection class	IP20
Weight	1.8 kg

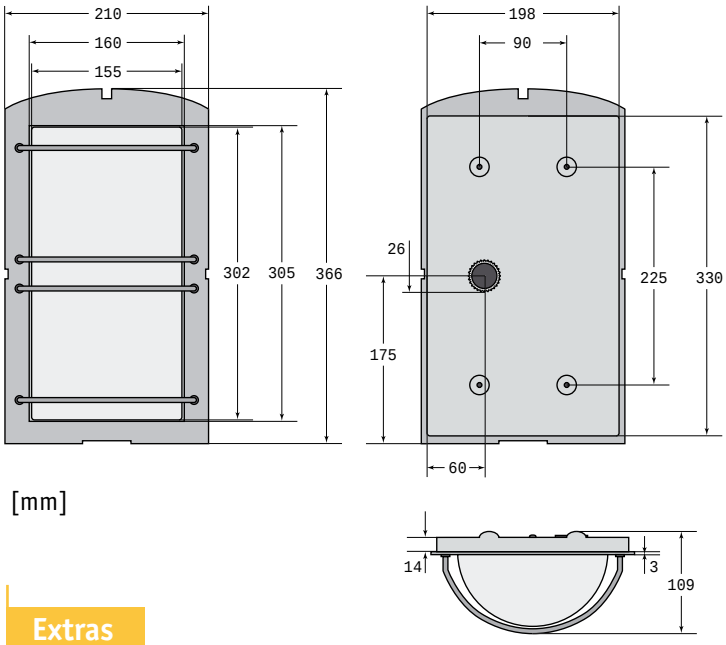

[mm]

Extras

120 V AC execution

Electronic ballast

Spare parts	Part no.
Diffuser	7112008600

Technical modification reserved without prior notice

Part no. 5127000900-xxx

Light source	Incandescent lamp (not included)
Lamp base	E14 / E27
Wattage	Max. 60 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Decorative wall light with switch for cabins, lounges and accommodation areas

Design	According to rules of maritime classification societies and relevant standards
Housing	Brass
Lamp cover	Opal PMMA
Mounting	4 mounting holes, Ø 3 mm
Cable entry	Ø 24 mm
Protection class	IP20
Weight	1.2 kg

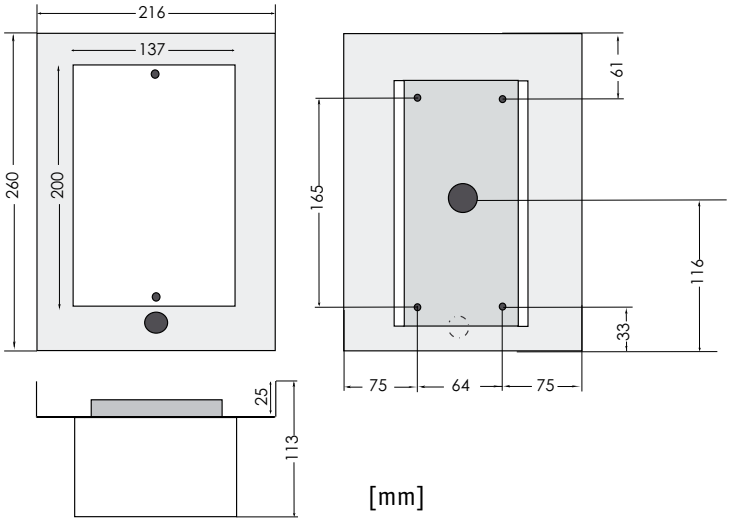

[mm]

Extras

Electronic ballast for compact fluorescent lamps

Other finish on request

Spare parts	Part no.
Diffuser	7112014100

Technical modification reserved without prior notice

Part no. 5127001800

Light source	Incandescent lamp (not included)
Lamp base	E27
Wattage	Max. 60 W
Voltage	110-240 V AC
Frequency	50-60 Hz

Decorative wall light with switch for cabins

Design	According to rules of maritime classification societies and relevant standards
Housing	Brass, polished
Lamp shade	Perlatex beige, washable
Mounting	4 mounting holes, 4x 8 mm
Cable entry	Ø 21 mm
Protection class	IP20
Weight	0.7 kg

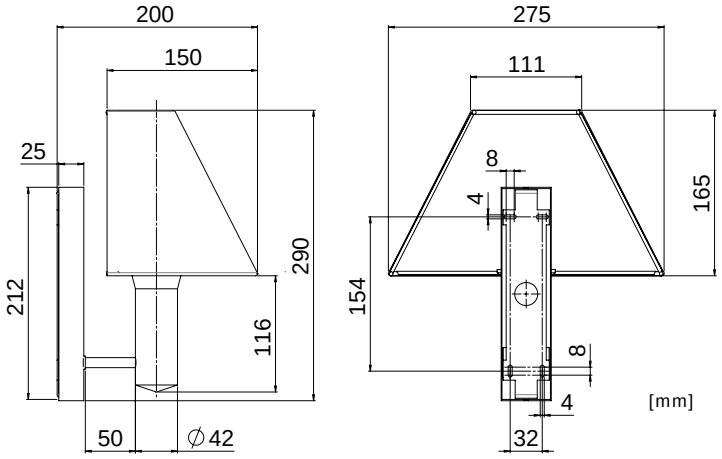

Extras

Different shades on request

Chrome finish

Spare parts	Part no.
Lamp shade	7112010700

Technical modification reserved without prior notice

Part no. 5127002001-013

Light source	Compact fluorescent lamp 2.700 K (included)
Lamp base	G24q-1
Wattage	1x 10 W
Voltage	220-240 V AC
Frequency	50-60 Hz

Decorative wall light with switch and adjustable LED reading light for cabins

Design	According to rules of maritime classification societies and relevant standards
Housing	Brass, chromium plated
Lamp shade	White Perlatex, washable
Reading light	1 W Power-LED 3,000 K, separately switchable
Mounting	4 mounting holes, Ø 5.5 mm
Cable entry	42x 19 mm
Protection class	IP20
Weight	1.3 kg

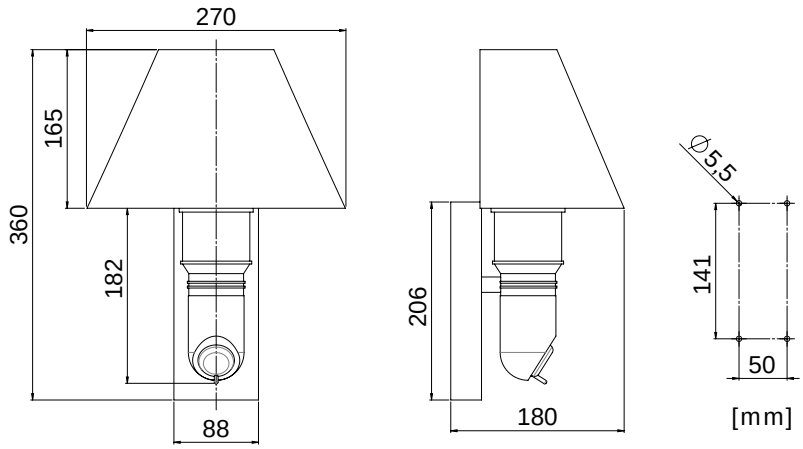

Spare parts	Part no.
Ballast w. lamp holder	7102019100
Lamp shade	7112004100
Reading light kit	5527000100-004
Switch	7201000600

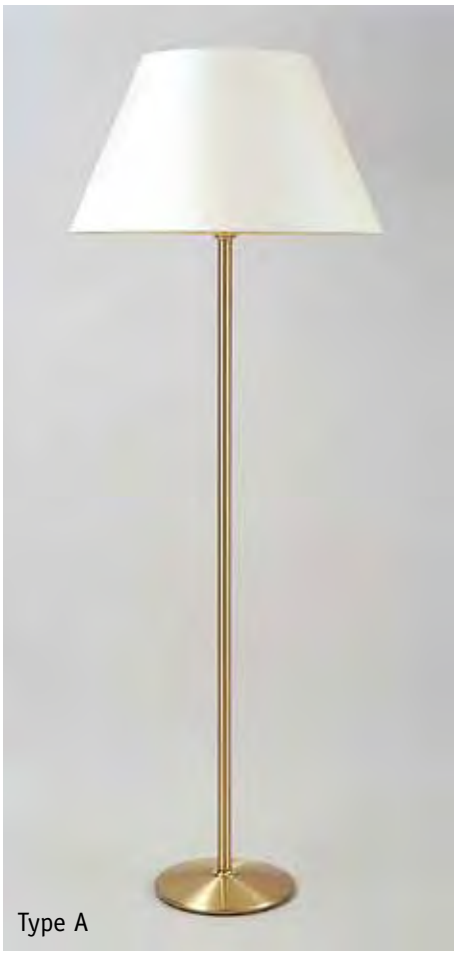
Type A

Type B

Type C

Type D

Part no. (see table below)

Light source	Incandescent lamp (not included)
Lamp base	E27
Voltage	110-240 V AC
Frequency	50-60 Hz

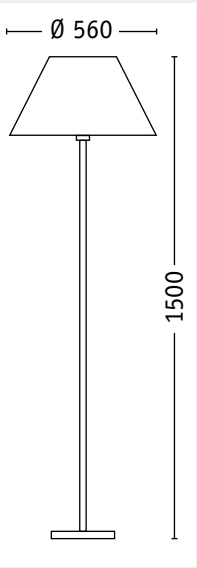

Type A



Type D



Type B



Type C

[mm]

Decorative lighting series for living rooms

Housing	Brass, brushed
Lamp shade	Perlatex champagne, washable
Connection type	Power cord with Euro plug and switch (type A, B, C)
Protection class	IP20

Type	Wattage	Part no.	Weight
A Floor lamp	Max. 70 W	5131000500-001	7.0 kg
B Table lamp	Max. 70 W	5135002500-001	1.7 kg
C Table Lamp	Max. 70 W	5135002600-001	1.5 kg
D Wall sconce	Max. 40 W	5127005700-001	1.2 kg

Spare parts	Part no.
Lamp shades	
Type A	7112032900
Type B	7112032800
Type C	7112026600
Type D	7112033000

Extras

Chrome finish

Lamp shade of white Perlatex

Technical modification reserved without prior notice

Part no. (see table below)

Light source	Incandescent lamp (not included)
Voltage	110-240 V AC
Frequency	50-60 Hz

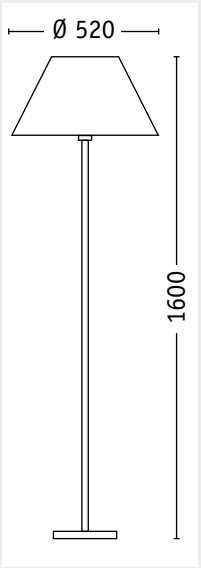

Type A



Type D



Type E



Type B



Type C

[mm]

Decorative lighting series for living rooms

Housing	Brass, nickel plated
Lamp shade	Chintz, natural white
Connection type	Power cord with Euro plug and switch (type A, B, C)
Mounting	Screw type base or wall mounting
Protection class	IP20

Type	Wattage	Base	Part no.	Weight
A Floor lamp	Max. 70 W	E27	5131003100-000	5.5 kg
B Table lamp	Max. 70 W	E27	5135008200-000	1.5 kg
C Table Lamp	Max. 70 W	E27	5135008300-000	1.5 kg
D Wall sconce	Max. 40 W	E14	5127011700-000	0.7 kg
E Wall sconce	Max. 40 W	E14	5127011800-000	1.0 kg

Spare parts	Part no.
Lamp shades	
Type A	7945000500
Type B	7945000600
Type C	7945000700
Type D/E	7934000700

Technical modification reserved without prior notice

Cabins

Spa area

Restaurants

Bars&Lounges

IMPRINT

LightPartner Lichtsysteme GmbH & Co. KG
A LEADING MANUFACTURER AND SUPPLIER OF MARINE LIGHTING PRODUCTS TO THE PASSENGER & CARGO SHIPPING INDUSTRY WORLDWIDE.

The products featured and described in this catalogue have been designed and developed for the Shipping Industry and comply to and meet with the most stringent International Marine Safety Requirements.

In addition to our standard product range we can also design and produce custom made Luminaires to suit your individual requirements and submit samples for your final approval.

All our Luminaires are available in a wide range of voltages and also 50Hz or 60Hz versions.

LightPartner Lichtsysteme GmbH & Co. KG reserves the right to alter product specification from that shown as part of their policy of continuous improvement and ongoing development.

Technical modification reserved without prior notice.
The shown pictures are for illustrative purposes only.

Layout & Realization, Banane Design GmbH, Bremen

Index	Chapter
AMBIA ...	8
BERLIN ...	8
DA16 ...	4
DA16F ...	4
DA30 ...	4
DA110 ...	4
DE02 ...	3
DE16 ...	3
DE22 ...	3
DE28 ...	3
DE29 ...	3
DE29S ...	3
DE29XS...	3
DE38 ...	3
DE60 ...	3
DE95DCC ...	3
DLSTAR ...	6
DL27 ...	6
DL33 ...	6
DL50 ...	6
DL52 ...	6
DL53 ...	6
DL67 ...	6
DL70 ...	6
DL73 ...	6
DL88 ...	6
DL90A ...	6
DL90AM ...	6
DL90E ...	6
DL90S ...	6
DL90S44 ...	6
DL99 ...	6
DL110Q ...	6
DL167...	6
DL180Q ...	6
DL660 ...	6
DL660M ...	6
EL14 ...	4
EL33 ...	4
EL66 ...	4
EX40 ...	2
EX53	2
EX92 ...	2
HL09 ...	5
HL13 ...	5
HL15 ...	5
HL16 ...	5
HL20 ...	5
HL21 ...	5
HL25 ...	5
HL26 ...	5
HL71 ...	5
KJ15 ...	4
KJ16 ...	8
KJ56 ...	4
KJ62 ...	3
KJ144 ...	4
KL61 ...	2
KL62 ...	2
KR40 ...	2
KR61 ...	2
LL15 ...	4
LL17 ...	4
SL46 ...	2
SL49 ...	2
SP66 ...	4
ST23 ...	1
ST68 ...	1
ST76 ...	1
TI14 ...	7
TI20 ...	7
TL09 ...	2
TL09Sign ...	5
TL40 ...	2
TL45 ...	2
TL53 ...	2
VG 76 ...	1
WL Melissa ...	8
WL28 ...	8
WL39 ...	8
WL55 ...	8
WL64 ...	8
WL77 ...	8
WL80 ...	8
WL100 ...	8
WL282 ...	8

LightPartner®
Lichtsysteme GmbH & Co. KG
Am Mohrenshof 7
D-28277 Bremen / Germany

Fon: +49 (0)421 - 87 195-0
Fax: +49 (0)421 - 87 195-19
www.lightpartner.de